



FINAL REPORT
ON

EXPERIMENTAL BALL BEARING
DYNAMICS STUDY

Reproduced by
**NATIONAL TECHNICAL
INFORMATION SERVICE**
U.S. Department of Commerce
Springfield, VA. 22151

by

Hans R. Signer

Industrial Tectonics, Incorporated
Compton, California 90221

prepared for

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION

NASA Lewis Research Center
Contract NAS 3-16730
H. H. Coe, Project Manager

(NASA-CR-134528) EXPERIMENTAL BALL
BEARING DYNAMICS STUDY Final Report
(Industrial Tectonics, Inc., Compton,
Calif.) 418 p HC \$9.00 CSCL 131
1/20

N74-22140

Unclassified
37913

G3/15

1. Report No. NASA CR-134528	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle EXPERIMENTAL BALL BEARING DYNAMICS STUDY		5. Report Date October 1973	6. Performing Organization Code
7. Author(s) Hans R. Signer		8. Performing Organization Report No. P-1246	
9. Performing Organization Name and Address Industrial Tectonics, Inc. Compton, California 90221		10. Work Unit No.	
12. Sponsoring Agency Name and Address National Aeronautics and Space Administration Washington, D.C. 20546		11. Contract or Grant No. NAS 3-16730	13. Type of Report and Period Covered Contractor Report
14. Sponsoring Agency Code			
15. Supplementary Notes Project Manager, Harold H. Coe, Fluid System Components Division, NASA Lewis Research Center, Cleveland, Ohio 44135			
16. Abstract A photographic method was employed to record the kinematic performance of rolling elements in turbo machinery ball bearings. The 110 mm split inner ring test bearings had nominal contact angles of 26° and 34°. High speed films were taken at inner ring speeds of 4,000, 8,000 and 12,000 rpm and at thrust loads of 4,448 N and 22,240 N (1,000 and 5,000 lbs). The films were measured and this data reduced to obtain separator speed, ball speed and ball spin axis orientation. The experimental results, which show logical trends, should now be compared to theoretical values to establish correlation. The program yielded useful information on ball dynamics. However, further refinements of the experimental and data reduction techniques are possible and would result in improved data.			
17. Key Words (Suggested by Author(s)) Ball bearing dynamics Bearing tests Photographic test method High-speed photography		18. Distribution Statement Unclassified - unlimited	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 120	22. Price* \$ 9.00

* For sale by the National Technical Information Service, Springfield, Virginia 22151

P R E F A C E

The author gratefully acknowledges the efforts of Mr. R. W. Anderson of Pratt & Whitney Aircraft Division, East Hartford, Connecticut who developed the computerized data reduction for this program. The cooperation of Messrs. R. P. Schevchenko and P. F. Brown, also of P & WA Div., in this and earlier programs was instrumental in developing the Separator Study Machine into a viable research tool.


Preceding page blank



TABLE OF CONTENTS


	<u>Page</u>
1.0 Summary and Conclusions	1
2.0 Introduction	3
3.0 Test Facility	5
3.1 Main Spindle Assembly	5
3.2 The Scanner and Lighting Systems	6
4.0 Lubricant	8
5.0 Test Bearing Preparation	8
5.1 Dimensional Data of Test Bearings	8
5.2 Open Pocket Separator	9
5.3 Test Balls	9
6.0 Test Plan, Procedures and Test Conditions	10
6.1 Task I - Bearing Tests	10
6.2 Task II - Data Reduction	11
7.0 Results and Discussion	14
7.1 Interpretation of Test Results	14
7.2 Accuracy of Experimental Data	16
7.3 Suggested Program Improvements	18
8.0 References	20

Preceding page blank




LIST OF ILLUSTRATIONS

<u>Figure Number</u>	<u>Title</u>	<u>Page Number</u>
1	Separator Study Machine (General View)	21
2	Main Spindle Assembly	22
3	Lamp Housing Assembly	23
4	Optical Paths through Bearing Scanner	24
5	Test Bearings (line drawing)	25
6	Separator With Open Ball Pocket	26
7	Ball Marking by Electro-Chemical Etching	27
8	Test Balls used in Investigations of Bearing Kinematics	28
9	High-Speed Motion Picture, Ball Bearing Tests	29
10	Measurement of Test Ball Used in Investigations of Bearing Kinematics	30
11	Model of Camera-Bearing System	31
12	Plots of Ball Motion for Test Run No. IA-1	32
13	Plots of Ball Motion for Test Run No. IA-2	33
14	Plots of Ball Motion for Test Run No. IA-3	34
15	Plots of Ball Motion for Test Run No. IA-4	35
16	Plots of Ball Motion for Test Run No. IA-5	36
17	Plots of Ball Motion for Test Run No. IA-6	37
18	Plots of Ball Motion for Test Run No. IB-1	38
19	Plots of Ball Motion for Test Run No. IB-2	39
20	Plots of Ball Motion for Test Run No. IB-3	40
21	Plots of Ball Motion for Test Run No. IB-4	41
22	Ball Rotational Speed vs Inner Ring Speed	42
23	Separator Speed vs Inner Ring Speed	43
24	Ball Attitude Angles as Function of Inner Ring Speed and Thrust Load	44



LIST OF APPENDICES

<u>Appendix Number</u>		<u>Page Number</u>
1	Ball Motion Printout for Tests IA-1 through IA-6	45
2	Ball Motion Printout for Tests IB-1 through IB-4	83
3	Ball Map Printout for Test Balls No. 2 and 3	109



1.0 SUMMARY AND CONCLUSIONS

Present bearing theories enable computerized optimization of high performance rolling element bearing designs, and theoretical predictions of bearing performance to be made. There is, however, a need to verify these solutions by advanced test methods.


The difficult task of measuring the dynamic behavior of rolling elements, especially in a ball bearing, has been solved by a photographic method. The Separator Study Machine which was used for this investigation produces high-speed movies of the rolling element under investigation at programmed speed and load conditions.

The research which is reported herein had the objective to measure separator speed, orientation of the ball spin axis, and ball rotational speed in a ball bearing operating at high speeds.

The tested ball bearings were of split inner ring design, 110 mm bore size, and had nominal contact angles of 26° and 34°. These bearings were prepared for optical measurements by providing an open pocket separator and a test ball which was marked with shallow but indelible markings.

High-speed motion pictures were obtained of these bearings at inner ring speeds of 4,000, 8,000 and 12,000 rpm and at thrust loads of 4,448 N and 22,240 N [1,000 and 5,000 lbs]. The high-speed movies represented true and accurate records of the dynamic behavior of the bearings at the above test conditions.

The high-speed films were subsequently examined to determine instantaneous ball positions and this data reduced to obtain separator speed, ball speed, and ball spin axis angle orienta-



tion in two planes. The orientation of this spin axis was expressed in pitch and yaw angles.

The experimental results show logical trends. They should now be compared to calculated results obtained from computer runs for the same operating conditions for an evaluation of how well the measured data correlates with theoretical predictions of ball dynamics.

While the high speed films represent true and accurate records of the ball motion, it was found that there are some inaccuracies in the process used to reduce the photographed data to obtain the numerical values expressing ball motion. These inaccuracies suggest that several refinements should be considered to improve the data in future investigations. Such refinements are possible and practical in the filming technique itself, and also in the film measuring technique, as well as in the computerized data reduction procedure.

The program yielded useful information on ball dynamics. However, further refinements of the employed techniques are possible and would unquestionably result in improved data.

PRECEDING PAGE BLANK NOT FILMED



2.0 INTRODUCTION

Computerization of high-speed bearing theory enables the optimization of rolling element bearing designs and the theoretical prediction of bearing performance. These computerized results and the theories on which they are based, while extremely helpful to the design and research engineer, have yet to be fully verified by actual bearing tests.

Bearing performance tests and computer studies will always be needed to refine bearing designs for many critical applications.

The interaction in a bearing between the rolling elements, raceways and separators is particularly difficult to measure due to the random nature of their motion and forces. The kinematic behavior and the resulting forces acting on a rolling element/sePARATOR/raceway assembly could previously be measured only in tests where the operating conditions were drastically simplified.

To solve this measurement problem, ITI has developed the Separator Study Machine. This machine was designed and built as a research tool and is capable of measuring, by photographic methods, the motions of rolling elements within a bearing. The machine thus makes it possible also to study the interaction between these rolling elements and the bearing separator and raceways under a variety of load and speed conditions.


The technique employed relies on a derotation prism to eliminate optically the gross rotation of the test bearing separator. Measurements can be performed on test bearings of 100 to 110 mm bore size, operating at speeds up to 15,000 rpm and under any practical combination of thrust and radial loads up to 66,720 N and 13,350 N [15,000 lbs and 3,000 lbs] respectively.



An initial investigation ¹ of the rolling element and separator dynamics in a 100 mm cylindrical roller bearing proved that the machine is capable of performing these tasks, and that this data collecting method is viable. Subsequent efforts were directed toward developing measuring techniques on ball bearings. The difficult problem of photographing a ball in a ball bearing and measuring its position from the film frame was solved (2). A computerized data reduction technique was then developed (3) and checked out (4) to calculate ball velocities and spin axis direction from the measurements taken of high-speed motion pictures.

In the program reported herein, measurements were made on test ball bearings of 110 mm bore size with mounted, nominal contact angles of 26° and 34°, operating at speeds of 4,000, 8,000 and 12,000 rpm. It was the objective of these tests to gain information on separator speeds and on ball motion, such as orientation of spin axis and rotational speed about this axis as a function of the ball position relative to the bearing outer race.

¹Numbers in brackets () designate references at end of report.



3.0 TEST FACILITY

The tests were conducted on the Separator Study Machine. This test machine is capable of taking high-speed photographs of a selected target in a test bearing which is operated at programmed speed and load conditions. The target can be a rolling element and/or a portion of the bearing separator.

Figure 1 shows a view of the Separator Study Machine:

- A welded frame structure supports the test spindle with its drive mechanism, a load system to apply static loads to the test bearing, and an electro-optical scanning unit, as well as the main control panel.
- The bulk of the electronic hardware and the capacitors for the strobe lights are mounted in free standing relay racks.

3.1 Main Spindle Assembly

Figure 2 illustrates the main spindle assembly which was used in this program. The test bearing is cantilevered from the main spindle, which in turn is supported by preloaded turbo-engine main shaft ball bearings.

The test bearing housing is supported by the test bearing and a large thin section bearing. Radial and thrust loads are applied to the test bearing through load cables which are attached to the periphery of the test bearing housing. The test bearing itself is exposed in the front to allow clear entrance of the optical path and illumination. The bearing is lubricated through a series of orifices from the inside of the test bearing housing.



3.2 The Scanner and Lighting Systems

The bearing scanner is used to observe and photograph an individual separator pocket of the test bearing.

Due to the high tangential velocities when a bearing rotates at shaft speeds up to 15,000 rpm, conventional photographic techniques are inadequate. The difficulty lies in obtaining pictures having sufficient resolution for analysis when very short exposures are required to freeze the motion of the bearing elements. This problem has been overcome by eliminating the gross rotational motion using a derotation prism. The derotated image thus presents the differential motion between the separator and the remaining bearing components.


The synchronization of the prism with the test bearing separator is accomplished by a servo-drive which receives its command signals from a UV-light illuminated target on the bearing separator.

An array of strobe lamps and UV lamps are supported by a lamp housing (figure 3) which fits tightly against the shroud in front of the test bearing. The shroud collects the lubricating oil, and with the assistance of an air blanket, keeps the oil from splashing against the glass window which separates the shroud cavity and the lamps.

To photograph a ball in a ball bearing, the front strobe lights are augmented by a light which provides a luminous background. Thus, the contour of the test ball becomes visible as a silhouette, and the ball center can be determined when the movie frames are analyzed.

Two cameras are tuned to the lens system of the scanner:

- a 35 mm, pulse-operated camera takes pictures at the rate of up to 16 frames per second. It is used mostly to investigate forces and relative motion



within a test bearing.


- a 16 mm Fastax camera capable of up to 8,000 frames per second is used for motion studies or other investigations where continued motion recording is of prime importance.

Figure 4 shows the optical paths through the bearing scanner.

Specification of Optical Bearing Scanner

The optical bearing scanner performs to the following specifications:

- separator speed range for picture taking	200-7000 rpm
- speed variation of separator	$\pm 5\%$ of nominal rpm/revolution
- field of view	28.6 mm x 25.4 mm [1-1/8" x 1"] rectangular segment of bearing having an O/D of 177.8 mm [7"] and an I/D of 101.6 mm [4"]
- optical resolution	25 lines/mm at the object
- strobe duration	$\sim 1 \mu$ second
- maximum strobe rate	max. 16 strobos/second for pulse camera
	max. 8,000 strobos/second for Fastax operation, up to 200 frames per run.



4.0 LUBRICANT

The test bearing was lubricated with a type II oil which is qualified to MIL-L-23699. The viscosity of this oil is 10.8 centistokes at 339°K [150°F] and 5.7 centistokes at 367°K [200°F].

5.0 TEST BEARING PREPARATION

The tested ball bearings were ABEC 7 grade, split inner ring design, of 110 mm bore size. The reported test program was performed with bearing ITI 13453 which has a nominal contact angle of 26° and with ITI 13454 which has a nominal contact angle of 34°. The detailed dimensional data on both test bearings are given in paragraph 5.1 and in figure 5.

5.1 Dimensional Data of Test Bearings

Bearing P/N	ITI 13453	ITI 13454
used in tests series	IA	IB
Contact Angle (static)	26.1°	33.7°
Bearing Clearance, cm [inches]		
- radial	.0130 [.0051]	.0239 [.0094]
- axial	.056 [.022]	.079 [.031]
Race Radii, cm [inches]		
- inner	.980 [.386]	.986 [.388]
- outer	.988 [.389]	.991 [.390]
Surface Finish - Inner Race, μ m[μ in]		
- circumferential	.10-.15 [4-6]	.05-.10 [2-4]
- transversal	.15-.20 [6-8]	.13-.20 [5-8]
Surface Finish - Outer Race, μ m[μ in]		
- circumferential	.05-.10 [2-4]	.08-.10 [3-4]
- transversal	.13-.18 [5-7]	.13-.18 [5-7]
Ball Size, cm [inches]	1.9048 [.749910]	1.9048 [.749910]
Number of Balls	20	20
Separator Clearance, cm [inches]		
- pocket	.046 [.018]	.046 [.018]
- inner land	.053 [.021]	.056 [.022]
Separator Balance Level gm-cm	3	3



5.2 Open Pocket Separator


To investigate ball kinematics it is necessary to expose the test ball to the view of the camera without interfering with its typical performance. A special separator was provided for this purpose (figure 6). The internal geometry of the open pocket duplicated the standard pockets. Care was taken to ensure that the mass and strength of this separator were not significantly different from a standard separator. The separator was balanced to 3 gr-cm. Special attention was given to the shape of the light reflecting surfaces to either side of the open ball pocket. These reflectors serve to illuminate the test ball, increasing the visible test ball surface in a movie picture.

5.3 Test Balls

The ball marking had to provide a recognizable and indelible address to selected points on the test ball surface without interfering with the ball motion or strength.

The test ball was marked with electro-chemically etched symbols which were about 2.5 micro-meters [100 μ -in] deep. The symbols used were both visible and measureable. Figure 7 shows the principle of electro-chemical etching and a surface trace over an etched symbol. An electrical current transports particles from the ball surface to the electrode. In the electrolyte these iron particles are oxidized and transported back to the ball, resulting in a black line which does not significantly mar the ball surface.

Test balls with typical selections of marking symbols are shown in figure 8. The corners and intersections on these symbols are measuring points and have known addresses on the ball surface. The symbols are recognized and their positions measured on the test movie frames (figure 9).



6.0 TEST PLAN, PROCEDURES AND TEST CONDITIONS

The reported project consisted of two major tasks. In task I the test hardware was prepared, the optical angle of the camera system was calibrated, and the bearing tests were performed. In task II the films were measured and the ball motion computed.

6.1 Task I - Bearing Tests

Bearing performance was investigated for ten operating conditions:

Test bearing ITI 13453 (26°)

Run No.	Spindle Speed RPM	Thrust Load N [lbs]
IA-1	4,000	4,448[1,000]
IA-2	4,000	22,240[5,000]
IA-3	8,000	4,448[1,000]
IA-4	8,000	22,240[5,000]
IA-5	12,000	4,448[1,000]
IA-6	12,000	22,240[5,000]


Test Bearing ITI 13454 (34°)

Run No.	Spindle Speed RPM	Thrust Load N [lbs]
IB-1	4,000	4,448[1,000]
IB-2	4,000	22,240[5,000]
IB-3	12,000	4,448[1,000]
IB-4	12,000	22,240[5,000]

The following values were held consistant in all runs:

Radial load	- None applied
Lubricant oil flow	- $3.15 \times 10^{-5} \text{ m}^3/\text{sec}$ [.5 gpm] (introduced through multiple jets)
Oil inlet temperature	- $339^\circ\text{K} \pm 5.6^\circ$ [$150^\circ\text{F} \pm 10^\circ$]
Bearing outer ring temperature	- $367^\circ\text{K} \pm 5.6^\circ$ [$200^\circ\text{F} \pm 10^\circ$]

In all of the scheduled tests, high speed movies were taken. Some of the runs had to be filmed several times to obtain the high quality images which are needed for reliable data reduction. A movie was considered of acceptable quality if (1) over its entire duration a sufficient number of measuring points can be seen and



identified, and (2) when the tracking of the optics was such that the test ball was centered in all photographs so that the maximum possible portion of the ball silhouette was visible.

6.2 Task II - Data Reduction

6.2.1 Data Collection


Each high-speed movie produced an exact record of the ball motion within the bearing. Two sets of measurements were required to determine this ball motion: mapping of the target points on the test ball, and measuring of these points on the individual frames of the test movies.

6.2.2 Mapping of the Test Ball

To map the address of each measuring point, an x,y,z coordinate system was assigned to the ball, and the pierce points of these axes with the ball surface were marked. The ball was then fastened to an indexing spindle which was part of a table with micrometer adjustments in the y and z directions. The ball axes were aligned with the axes of the table and the spindle. The individual target points on the ball periphery could now be aligned with an optical eye piece, and their location relative to the ball coordinate system could be recorded. The ball map was established by measuring each target point in two axes and then calculating the third coordinate. Figure 10 illustrates the fixture used for these measurements, and appendix 3 lists the ball maps.

6.2.3 Film Measurements

The position of the test ball within the bearing is defined by the ball center relative to the inner and outer races and the position of two known points on the ball periphery. In a test movie frame (figure 9) the projected ball center




is found readily with the aid of a template which is lined up against the ball image. The inner and outer ring clamps and the ball contour assist in this step. The ball center and the coinciding template center represent the 0 point of an x' , z' coordinate system in the photographic plane (figure 11). The film plane coordinates x' and z' of the selected points on the ball periphery can now be measured.

The large number of points which were marked on the test ball, and the light reflecting separator made it possible to recognize and measure 3 or 4 points in most film frames of the test movies. Since only 2 points on the ball periphery are needed to establish ball position, the additional points can be used to assure the correctness of the measurements. For instance, with three known surface points it is possible to calculate three ball positions, 4 points yield six possible ball positions. If one of the measured points is in error, a remarkable difference shows up in the computed results. This point could thus be eliminated and the ball position determined by averaging the remaining points.

6.2.4 Mathematical Data Reduction

The film measurements yield a record of the instantaneous ball position within the test bearing at the time of exposure. The kinematics of this rolling element can now be computed on the basis of a measured time interval between film frames.

The data reduction computer program which is based on (3) and the model shown in figure 11, solves for orbital ball speed (separator speed), orientation of ball spin axis (pitch and yaw), and rotational ball speed about this axis as function of ball center position relative to the bearing outer race.




The first step in this program determines the ball position in a film frame, based on the location of measured points on the target ball. The optics and location of the camera influence the measurements, and the locations of the target points must be translated into a suitable coordinate system. Figure 11A shows the relationship of the camera and bearing and the coordinate system used. The origin is the test ball center, with x tangent and z perpendicular to the pitch circle and y parallel to the bearing axis. The camera focal point is on the bearing axis and is, therefore, offset from y (in the y-z plane) by the bearing pitch radius. Program step 1 determines the x,y and z coordinates for a point on the ball, corrected for the offset condition.

Figure 11B shows the projection of a point on the ball onto the film plane, expressed in the x,y,z system. The overall magnification of x and z on the film is determined by photographing a reference distance and measuring it on the film. The ratio of the reference to measured distance is the photographic magnification.

To determine ball rotation, the location of two points must be found for two successive film frames. However, a pair of points visible on one frame is generally not visible on the next. The second step is, therefore, to calculate the locations of a pair of points based on the observation of two other points. This is accomplished with a vector scheme, based on the ball map generated from the measurements outlined in paragraph 6.2.2.

In step 3 the ball spin axis orientation, the angle of rotation and orbital speed is computed from the established ball positions in two successive film frames.



7.0 RESULTS AND DISCUSSION

7.1 Interpretation of Test Results


As outlined in the previous paragraph, ten photographic runs were conducted at spindle speeds of 4,000, 8,000 and 12,000 rpm, each under a thrust load of 4,448, and 22,240 N [1,000 and 5,000 lbs]. Six runs used the 26° contact angle bearing and four runs used the 34° contact angle bearing.

A computer print out of the ball motion (figures 12 thru 21) shows separator speed, ball speed, and ball orientation or spin axis angle in two planes. The pitch angle lies in a plane defined by the bearing axis and the ball center, the yaw angle defines the deviation of the ball spin axis from this plane. The sign for yaw angle indicates the direction of the spin axis deviation from the y-z plane (figure 11) and has the same sign (positive or negative) as the x-value for the target ball pole.

The examination of the plotted results indicate fairly large momentary excursions from the expected (relatively smooth) motion of the rolling element. These deviations are presently thought to have their origin in measuring errors which are further discussed in paragraph 7.2. After technique improvements are made, it is expected that the ball motion measurements will yield precise information on ball dynamics at a given location within the bearing as a function of the imposed operating conditions.

An average value representing each one of the operating conditions was plotted in figures 22 thru 24. These graphs show the results from figures 12 thru 21 after further modifying them to reflect the values achieved by straight line averaging of the curves, ignoring the large magnitude instantaneous excursions (blips on curves).

Ball rotational and separator speed versus inner ring speed are illustrated in figures 22 and 23. The plots show a logical trend



of increasing ball speed with increasing inner ring speed for both, the 26° and the 34° contact angle bearings. The difference between 4,448 N and 22,240 N [1,000 and 5,000 lbs] thrust load appears to be almost negligible with the 26° bearing. The difference is more noticeable, especially at higher spindle speeds, with the 34° bearing.

The separator speed measurements plotted in figure 23 also show a logical trend of increasing speed with increasing shaft speed.

Ball spin axis orientation, expressed in pitch and yaw angles, is shown in figure 24. The trend in measured pitch and yaw angles of the 26° and 34° contact angle bearings appear to be logical. The absence of the 8,000 rpm data point for the 34° bearing makes the comparison somewhat more difficult (dashed lines indicate curves given by two data points only).

At high thrust load and low speed the pitch angle approached the static contact angle; with increasing speed the pitch angle decreased due to centrifugal effects.

At light loads, even at low speed, the centrifugal effects seem to cause immediate reduction in pitch angle. A low pitch angle is maintained throughout the speed range.

At low inner ring speeds the measured yaw angles were very small, indicating a small amount of ball spin while at 12,000 rpm this spinning action appears to increase. The difference in direction of the yaw angle at 12,000 rpm between the two contact angle bearings is not understood at this time.

These actual four measured parameters should now be compared to computed results that are based on theoretical bearing performance at conditions IA and IB to see how well the measured data correlates with theoretical predictions of ball dynamics.

If the data correlates reasonably well we can assume that the



computer program and the theory on which it is based, as well as the presented experimental data, are reasonably correct.


Should a wide disparity exist between the data of this report and that which a computer program predicts for theoretical bearing performance, (particularly if the disparity is in the character of the trends) then there are two possible conclusions: (1) Either the theory on which the computer program is based does not accurately reflect the true dynamics of the bearing, or (2) the data that was produced in this program is inaccurate and does not represent the true conditions of the bearing dynamics.

7.2 Accuracy of Experimental Data

High speed films, which are the output of the Separator Study Machine, represent true and accurate records of the dynamic behavior of the photographed object. We know, however, that there are two known inaccuracies in the process used to reduce photographic data to obtain the values of yaw and pitch angle and ball and separator speed.

The first source for errors in the method are certain inaccuracies in measuring ball position utilizing the etched ball hieroglyphics. This can be corrected by incorporating the program improvements suggested in paragraph 7.3.

The second inaccuracy has its source in the computerized data reduction program. Initially the instantaneous ball position was computed from measurements of the ball center and four points at the ball periphery. Because only two points are needed, one of the superfluous points was dropped and the ball position was then averaged to best fit the remaining three points. In the course of the program this procedure was changed, and only two measuring points were actually used for the computation. Quite good results were obtained in some cases; however, in some other movies the ball motion error was increased by this modification.



A further characteristic of the data reduction plots presented is that the printed "average" separator and ball speeds and attitude angles are arithmetical averages from all individual values of the plot. The computer print out shows varying numbers of erroneous data points (high blips on graphs) which would indicate that there were large instantaneous speed changes. These values now affect the "average" values, and should have been omitted in the analysis of these curves.

The data in figures 22 thru 24 representing the final results of this investigation have been modified to reflect the values achieved not by the average shown in the print out, but rather by straight line averaging of the curves, ignoring the large magnitude blips.

Test run IA-5 (figure 16) rendered perhaps the smoothest curves of all. They represent data taken at 12,000 rpm under 4,448 N [1,000 lbs] thrust load. On the other hand, the curves representing tests IA-1 (figure 12) which was taken at 4,000 rpm under 4,448 N [1,000 lbs] thrust load is quite irregular. The comparison of the graphs of these two tests indicates that measuring errors are not a function of bearing speed at which the data was taken, i.e. the photographic system records the bearing component motions faithfully at speeds of 4,000 and 12,000 rpm.

From the plots representing IA-5 (figure 16) it can also be seen that a relatively low error in ball speed results in smooth curves defining ball spin axis orientation.


It is evident on all graphs that the plotted separator speed variations are well within \pm 2% limits. This is to be expected since separator speed measurements are much simpler to take than ball speed measurements.



7.3 Suggested Program Improvements

The above mentioned inaccuracies in the experimental results suggest that several refinements should be considered to improve the data in future investigations.


- (1) Filming technique - It has been found that the film frames which show the greatest number of measurable target points on the test ball yield the most accurate data. The test data could thus be improved by increasing the illumination of the target ball during the filming sequence.
- (2) Film measuring technique - Future large scale ball motion studies should be preceded by an evaluation of potential refinements in the film measuring technique. The present technique requires manual measurements of target points on the film projection with the aid of templates. This procedure is time consuming, and the accuracy of the readings depends on the skill of the technician (movie-reader). A computer aided system could be set up where the coordinates of the target points in a film projection are measured using a graphical digitizer and the measurements are directly printed out and compared for compatibility with their known relative position on the test ball periphery, i.e. with the established ball map. Such a system would not only result in considerable timesavings but would eliminate misinterpretations of target points and reduce erroneous readings. The major components for such a system are commercially available.
- (3) Computerized data reduction - Large, instantaneous ball speed variations are, as previously stated, caused by



occasional measuring errors. Presently these erroneous readings, especially the very large blips in the curves, affect the "average" ball speed, as well as the derived data for ball spin axis orientation. The curves could be effectively smoothed if all measuring points which yield an apparent ball speed deviation in excess of a predetermined amount, say 50% or 60% from the average speed (by its present definition), were ignored. Permitting data points within the relatively high 50% or 60% limit would eliminate only true error points, but would still permit the detection of considerable, but expected variations of ball speed as function of ball location.


Further, of immediate interest, is an error analysis to determine the effect of measurement errors on the results when the existing computer program is used. A paralleling effort should be performed to review the mathematical approach of the program itself to determine whether it is the best possible solution for the ball motion problem statement.


The foregoing indicates that this program resulted in useful information on ball dynamics. However, further refinements of the employed techniques are possible and desireable, and would unquestionably result in improved data.



8.0 REFERENCES

1. Boness, R. and Signer, H. R. ITI: Final Report on Separator Study Program for Roller Bearing, P-1192E, submitted to Pratt & Whitney Aircraft 1-25-72.
2. Signer, H. R., ITI: Final Report on Preparations for Ball Bearing Research Program with Separator Study Machine, P-1230, submitted to Pratt & Whitney Aircraft 11-15-71.
3. Anderson, R. W. and Brown, P. F. Jr., Pratt & Whitney Aircraft: A Method to Determine Ball Kinematics from High Speed Ball Bearing Movies, TDM-2306 of 5-19-72.
4. Fehlmann, U. O. and Signer, H. R., ITI: Final Report on Ball Kinematic Measurements to Checkout the Computer Program for Data Reduction, P-1230-I, submitted to Pratt & Whitney Aircraft 1-31-72.



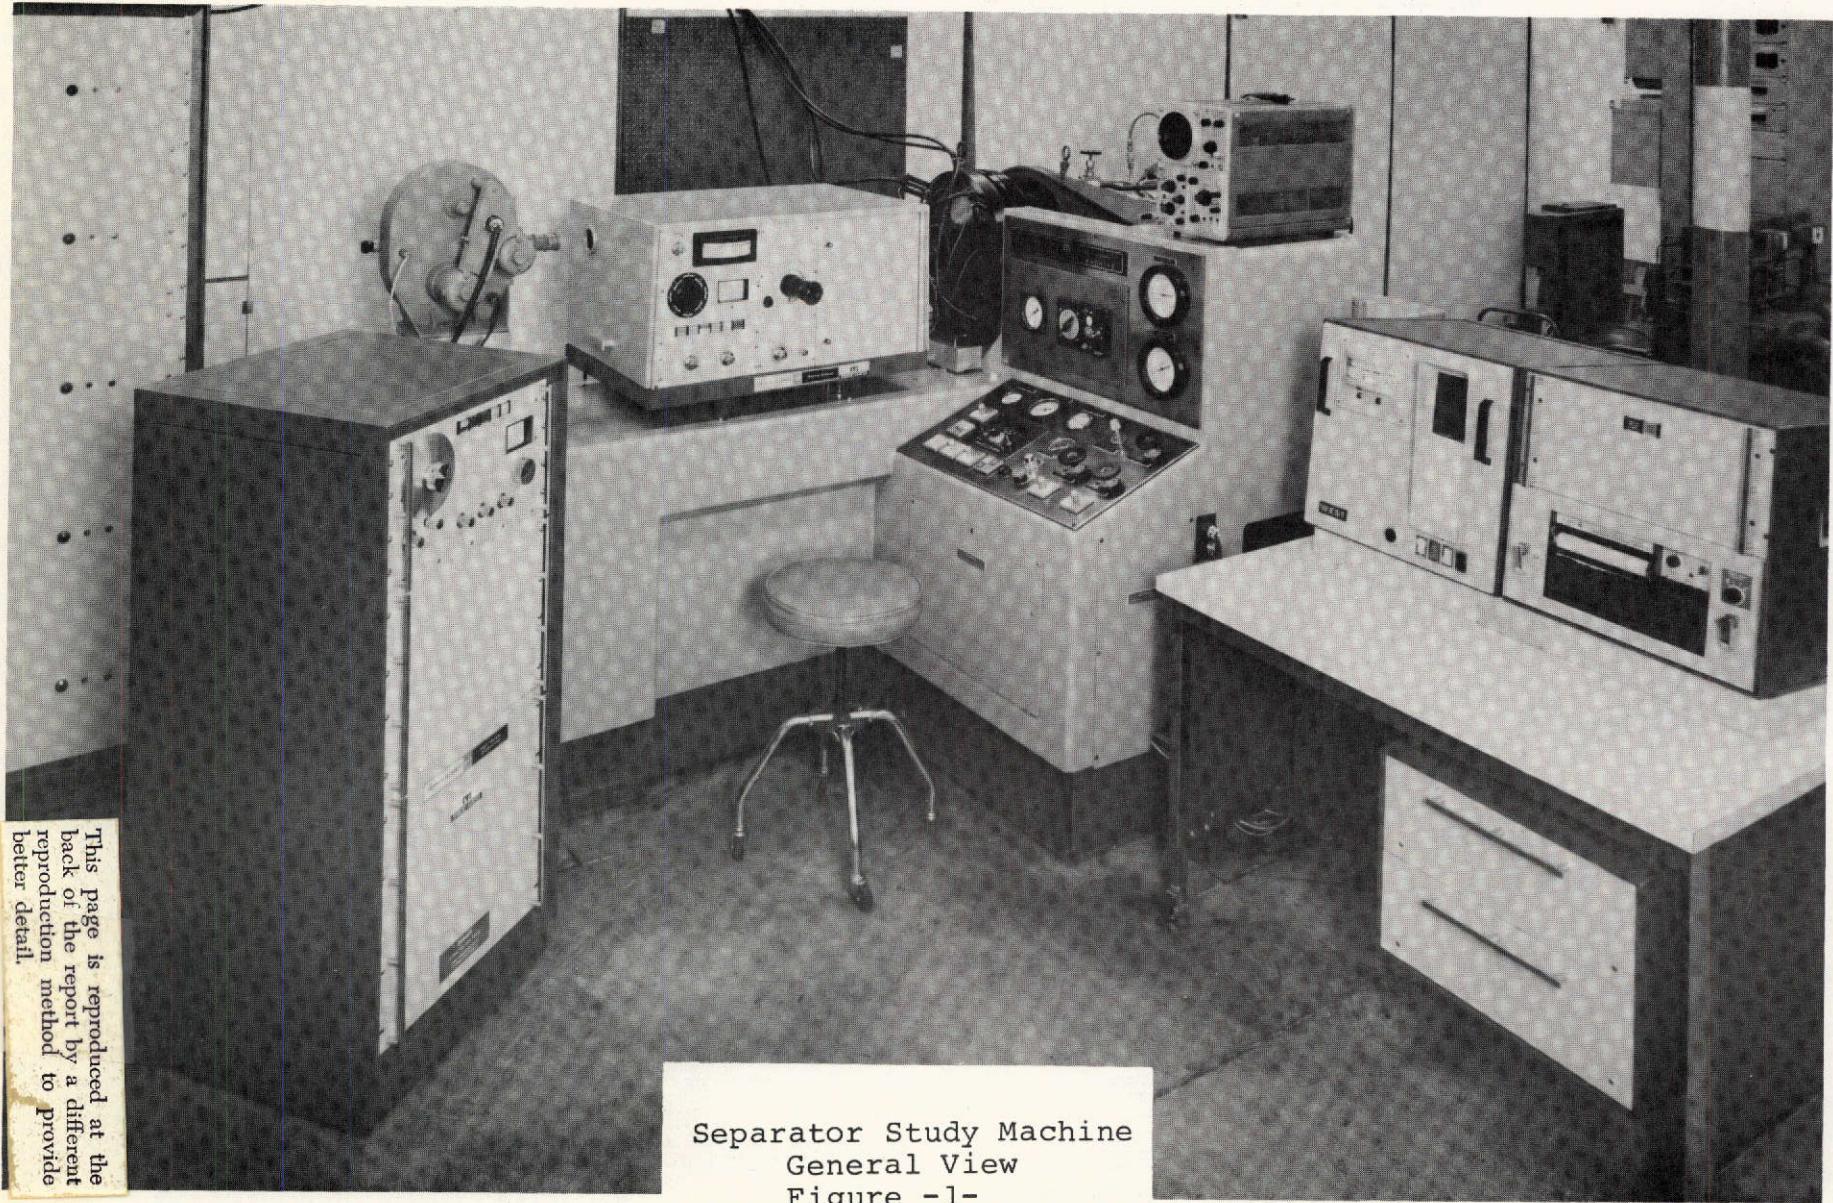

Separator Study Machine
General View
Figure -1-

This page is reproduced at the back of the report by a different reproduction method to provide better detail.


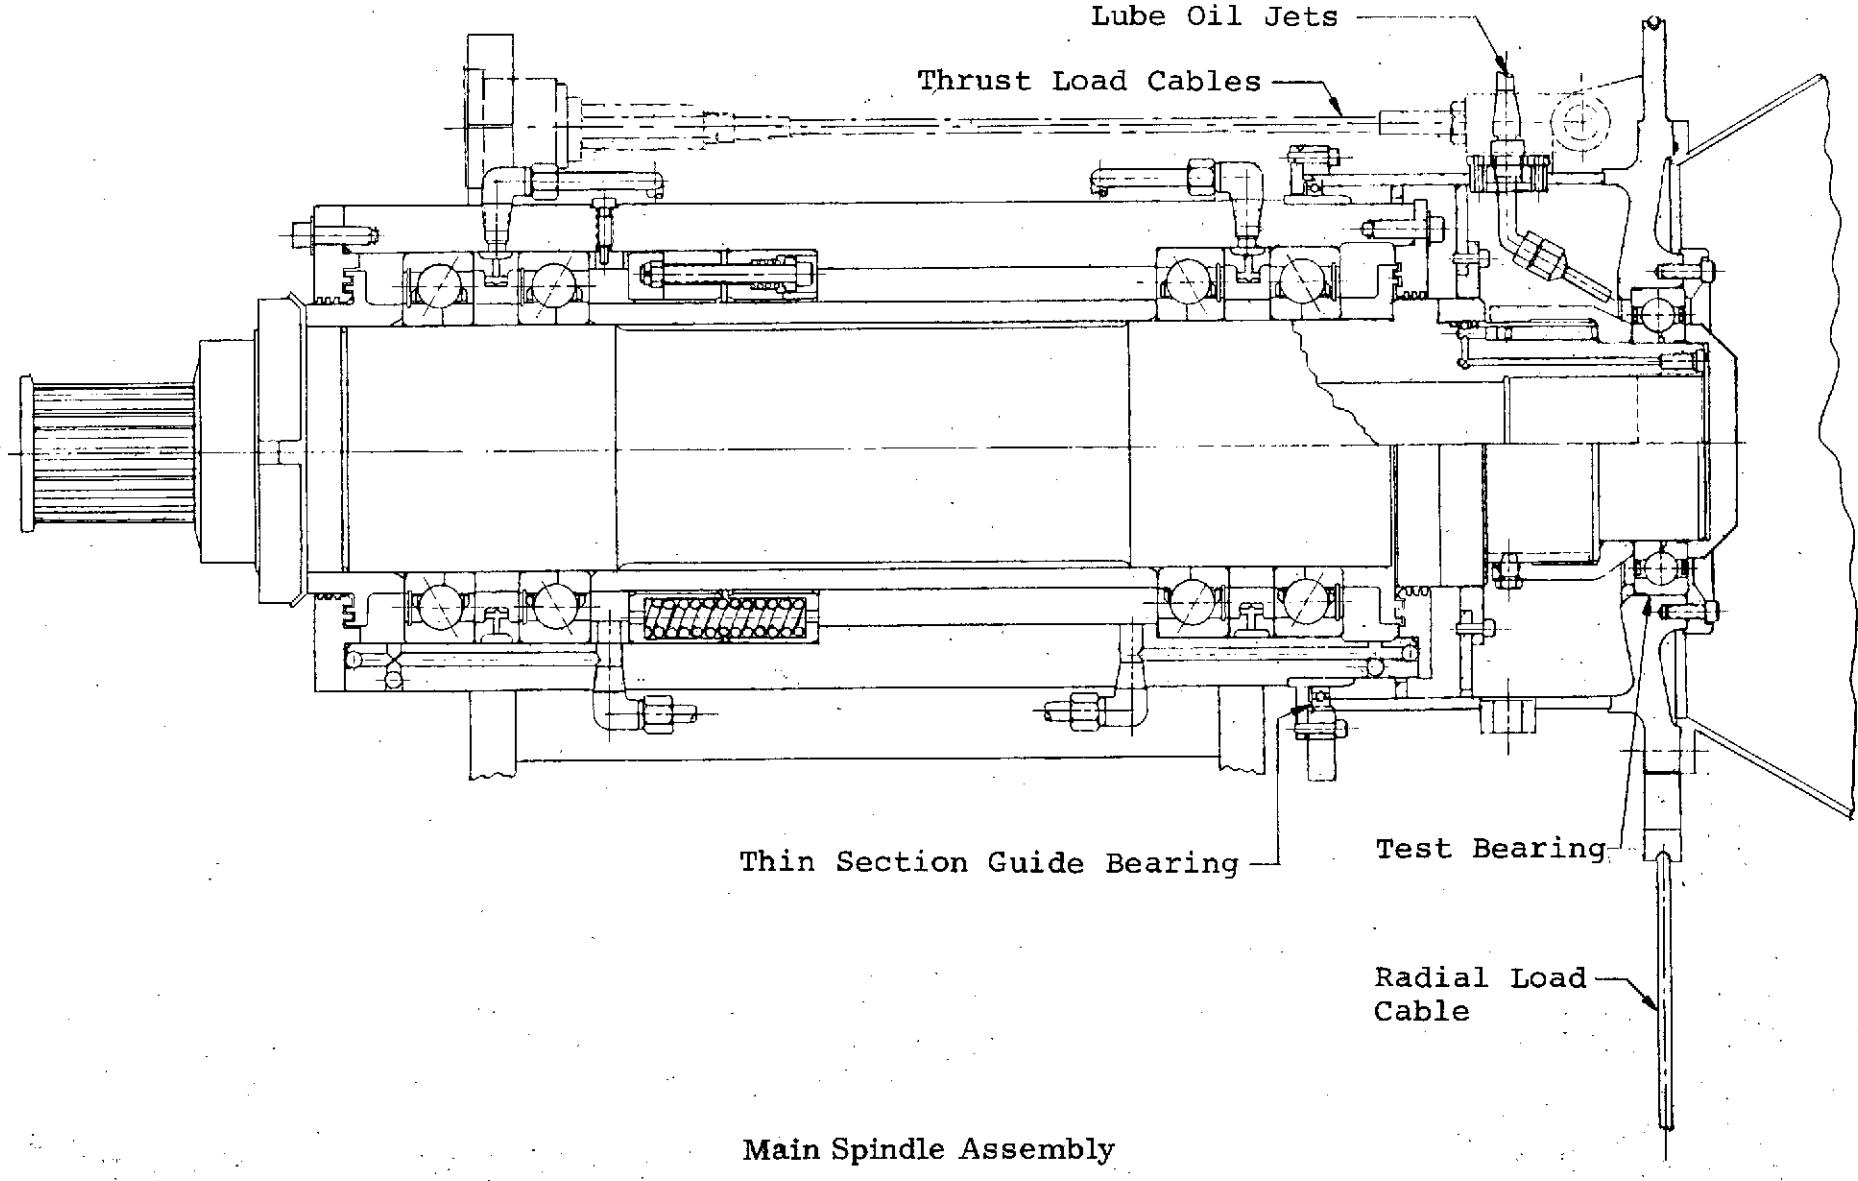


Figure -2-



INDUSTRIAL TECTONICS, INC., RESEARCH AND DEVELOPMENT DIVISION

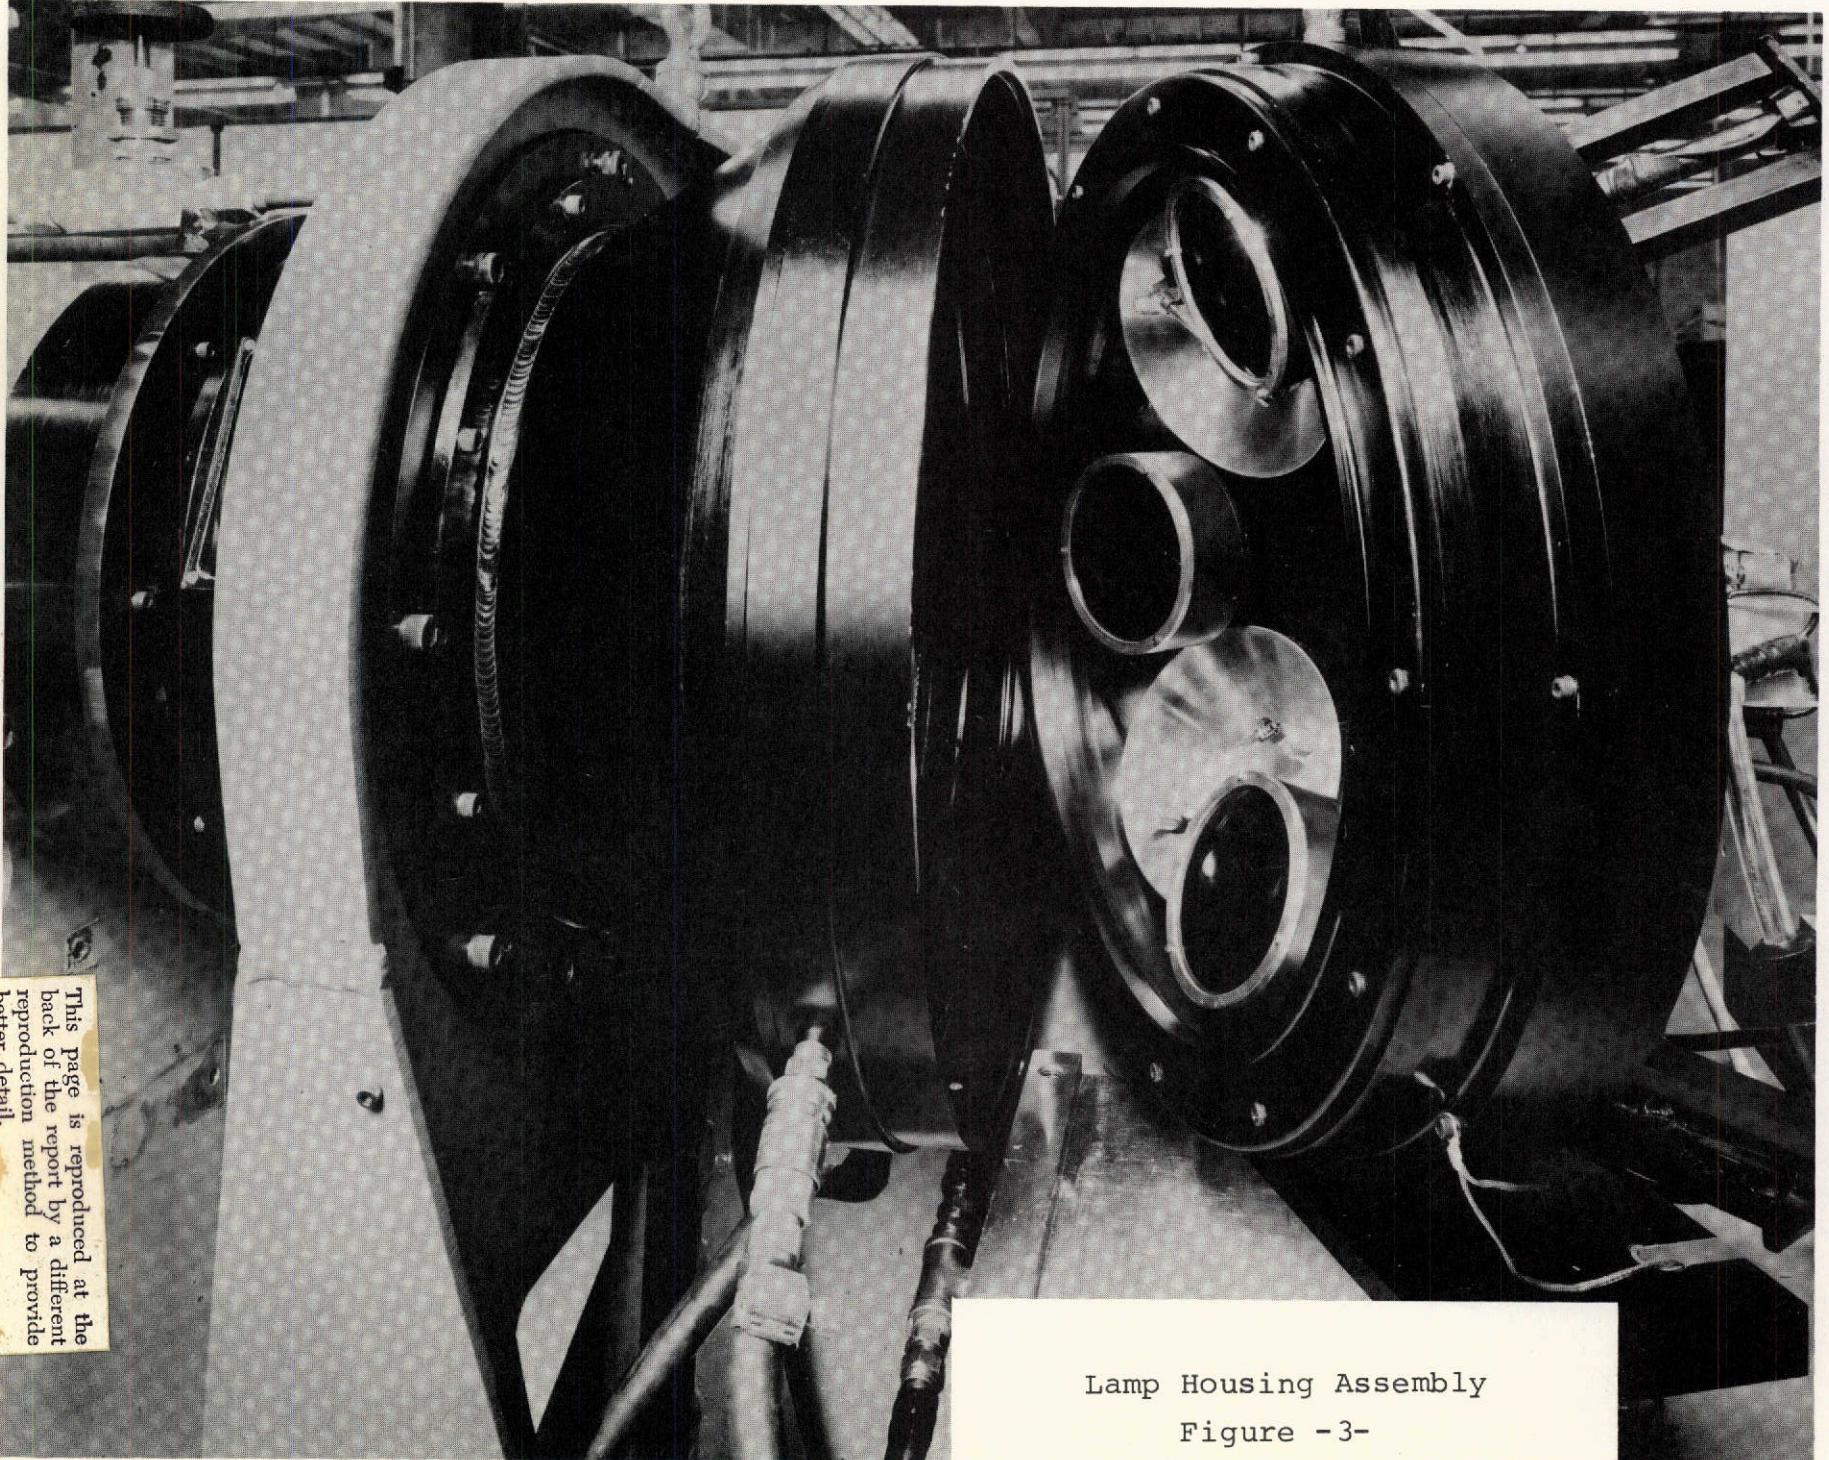

This page is reproduced at the back of the report by a different reproduction method to provide better detail.

Lamp Housing Assembly
Figure -3-

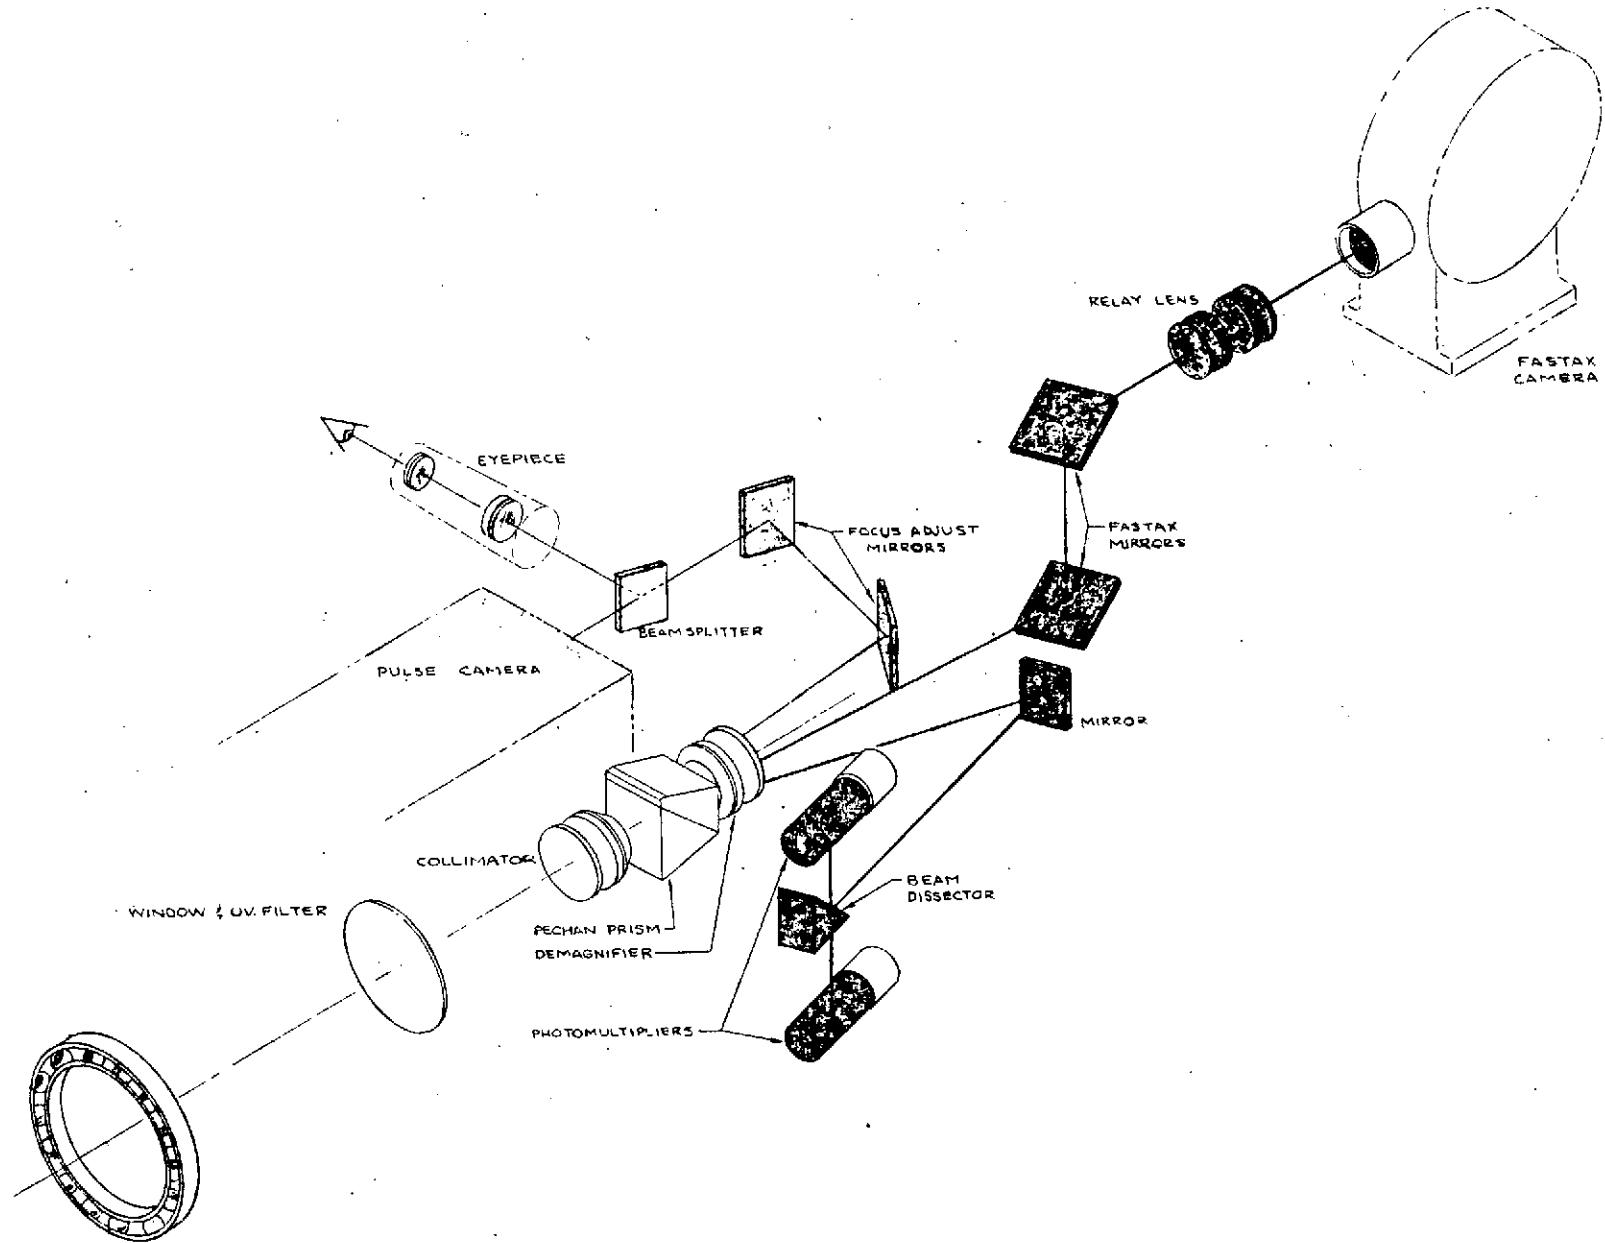


Figure -4-

Optical Paths through Bearing Scanner

INDUSTRIAL TECTONICS, INC., RESEARCH AND DEVELOPMENT DIVISION



C.R. P-1246	APP'D DR. KF	ITI IDENTIFICATION NUMBER 13453 / 13454	REV. (3)
RING MATERIAL CEVM M-50 R_c 61 MIN.	ROLLING ELEM. MAT CEVM M-50 R_c 61 MIN.		SPLIT INNER RING BALL BEARING
SEP. MAT. AND TYPE AMS 6415 1 PIECE MACH'D R_c 28 - 30		CONTACT ANGLE (3)	RACE RADIUS, % BALL DIA. 53 INNER 52 OUTER
OUTER RING OD 6.890 ID 6.070 WIDTH 1.181	INNER RING OD 5.340 ID 4.330 WIDTH 1.181	LUBRICATION	NO. AND SIZE ROLL. ELEMENTS 20 - .750 DIA. GRADE 10
		SEPARATOR	SPECIAL, OPEN POCKET

NOTES:

- ①** SEPARATOR INNER LAND GUIDED. Ag PLATED PER AMS 2410, .001-.002 THICK.
- ②** BALANCED TO 3 GRAM CENTIMETERS.
- ③** P/N 13453 - CONTACT ANGLE 24°-27°
P/N 13454 - CONTACT ANGLE 32°-35°


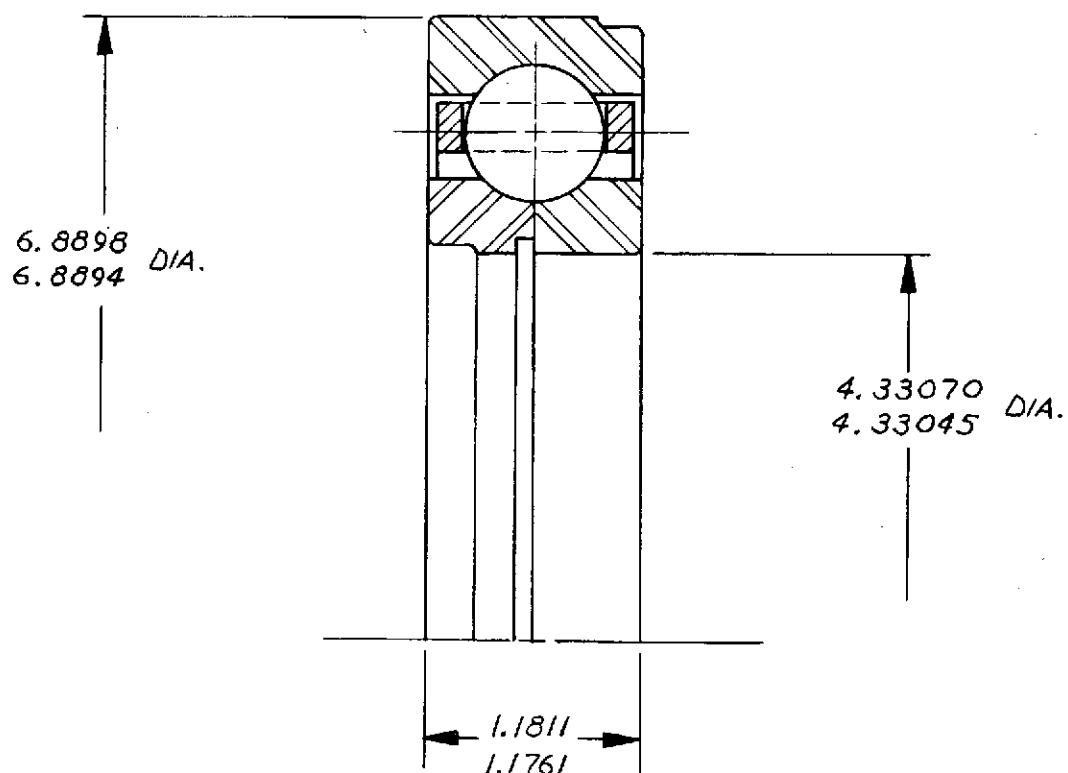




Figure -5-

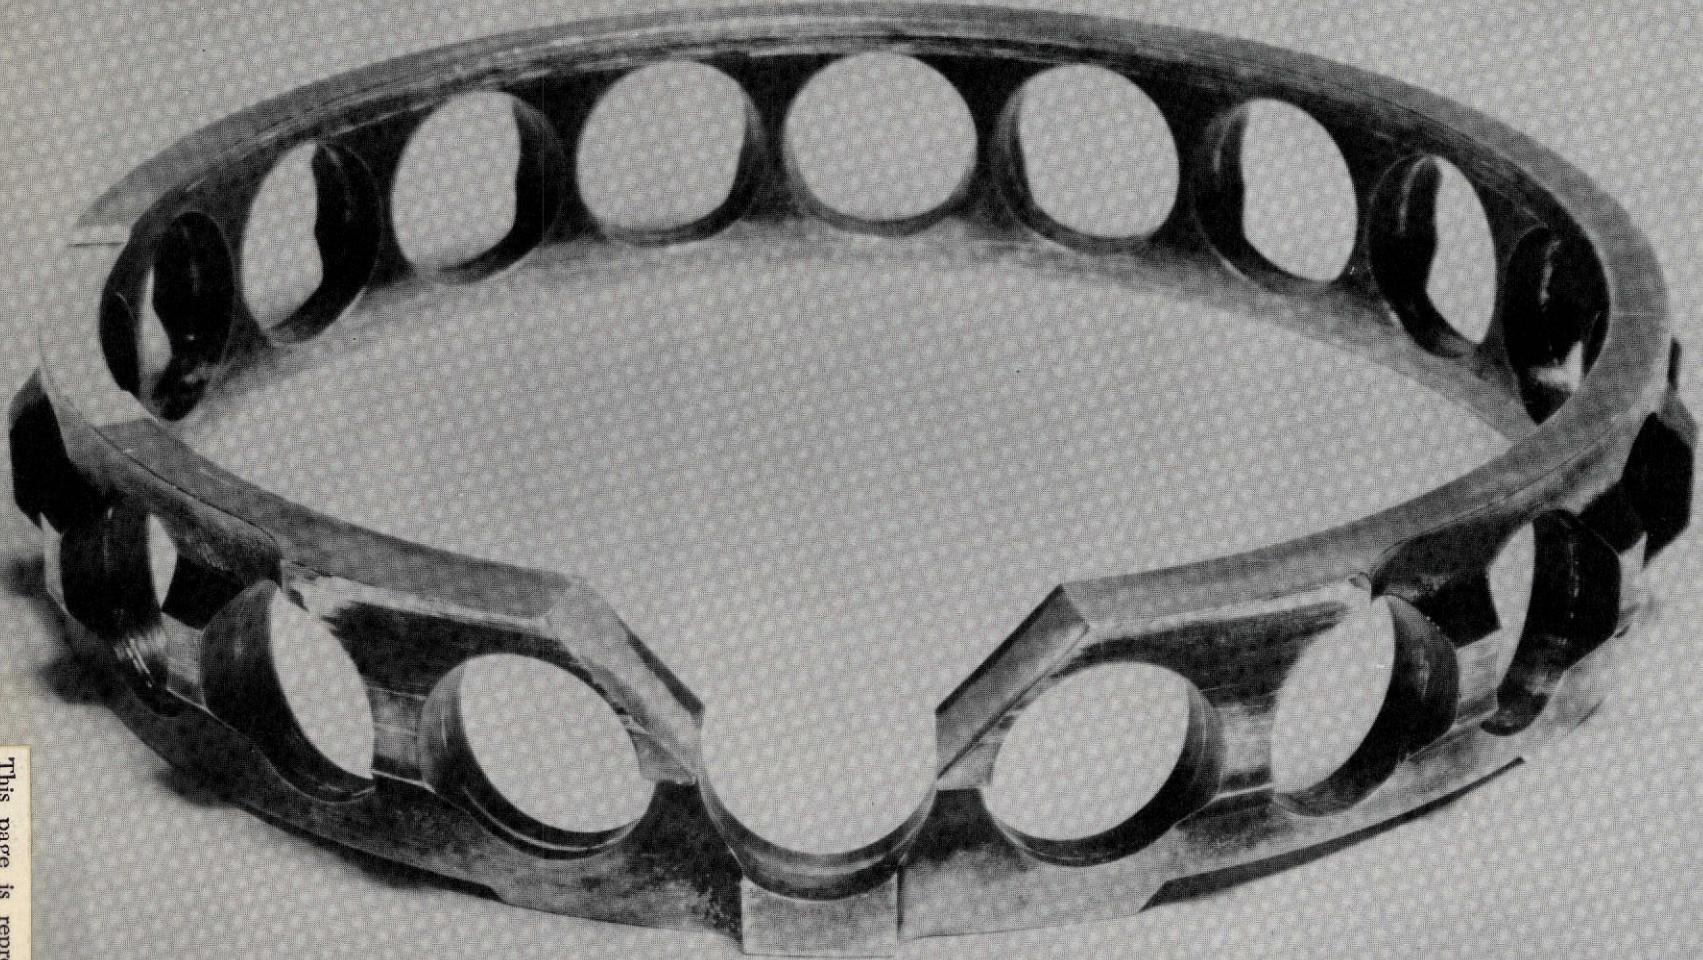

This page is reproduced at the back of the report by a different reproduction method to provide better detail.

Separator with Open
Ball Pocket

Figure -6-

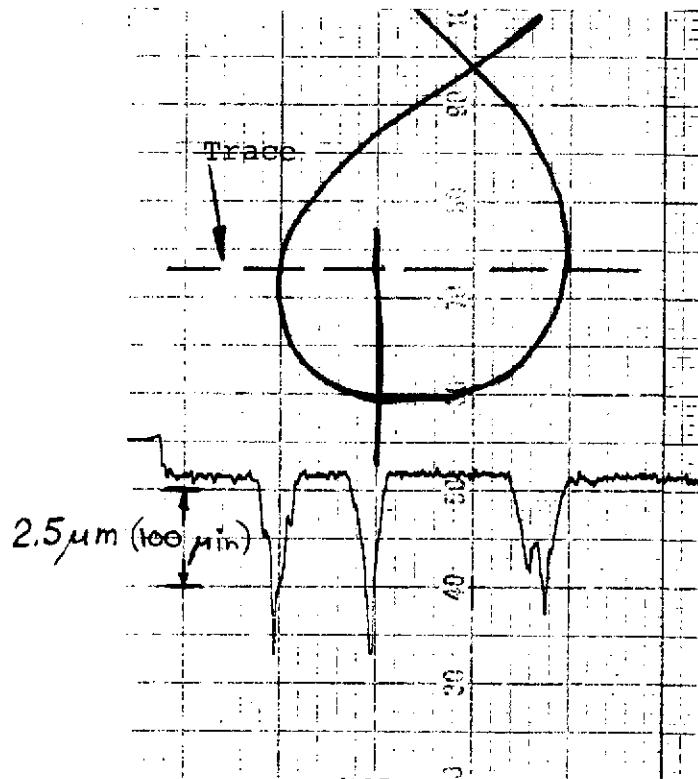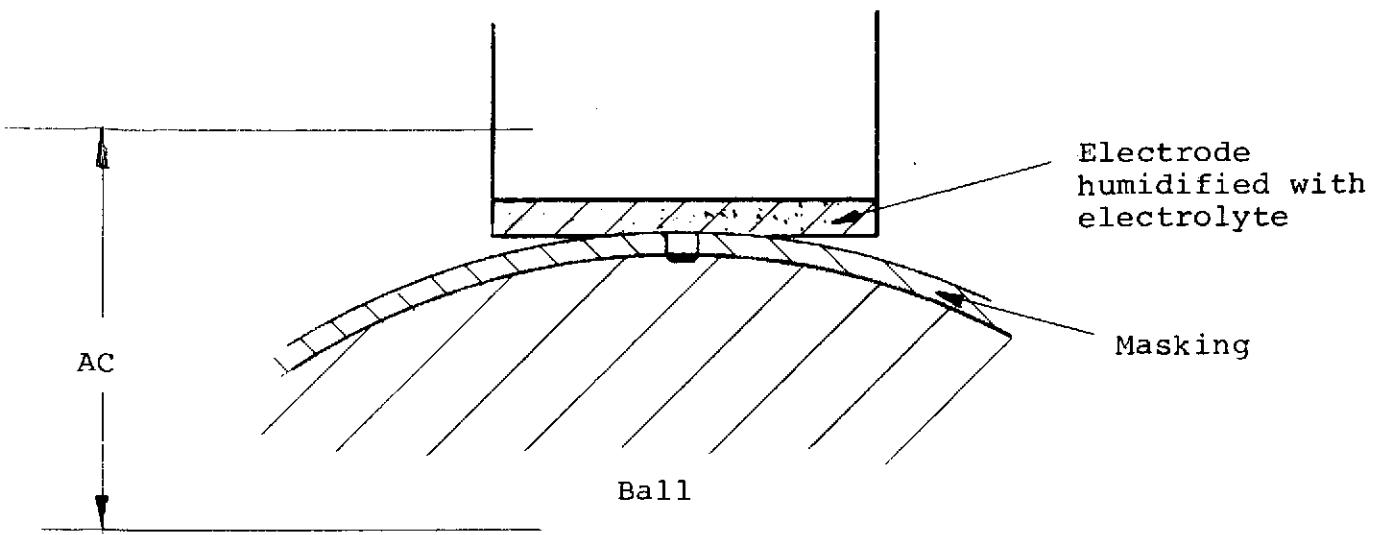


Surface trace of marked ball

Ball Marking by Electro-Chemical Etching

Figure - 7-




INDUSTRIAL TECTONICS, INC., RESEARCH AND DEVELOPMENT DIVISION

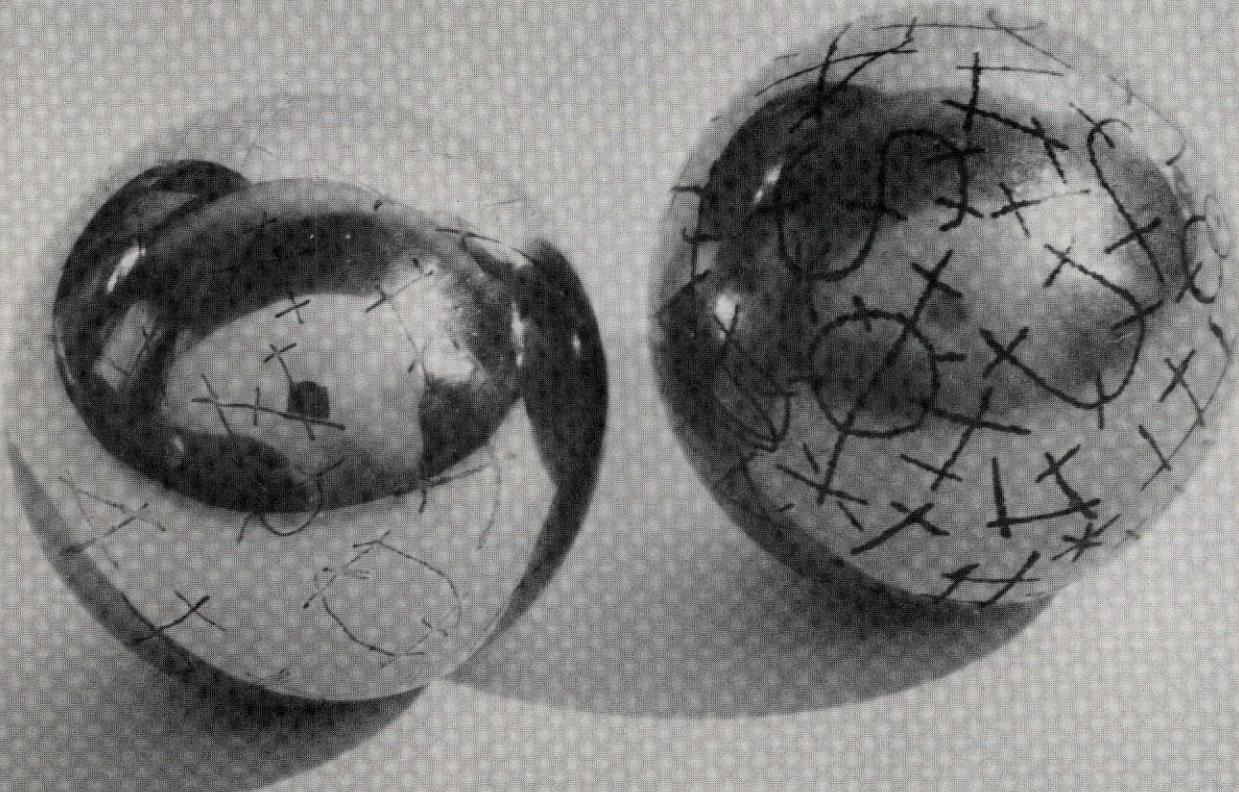

This page is reproduced at the back of the report by a different reproduction method to provide better detail.

Test Balls used in
Investigations of Bearing Kinematics


Figure -8-

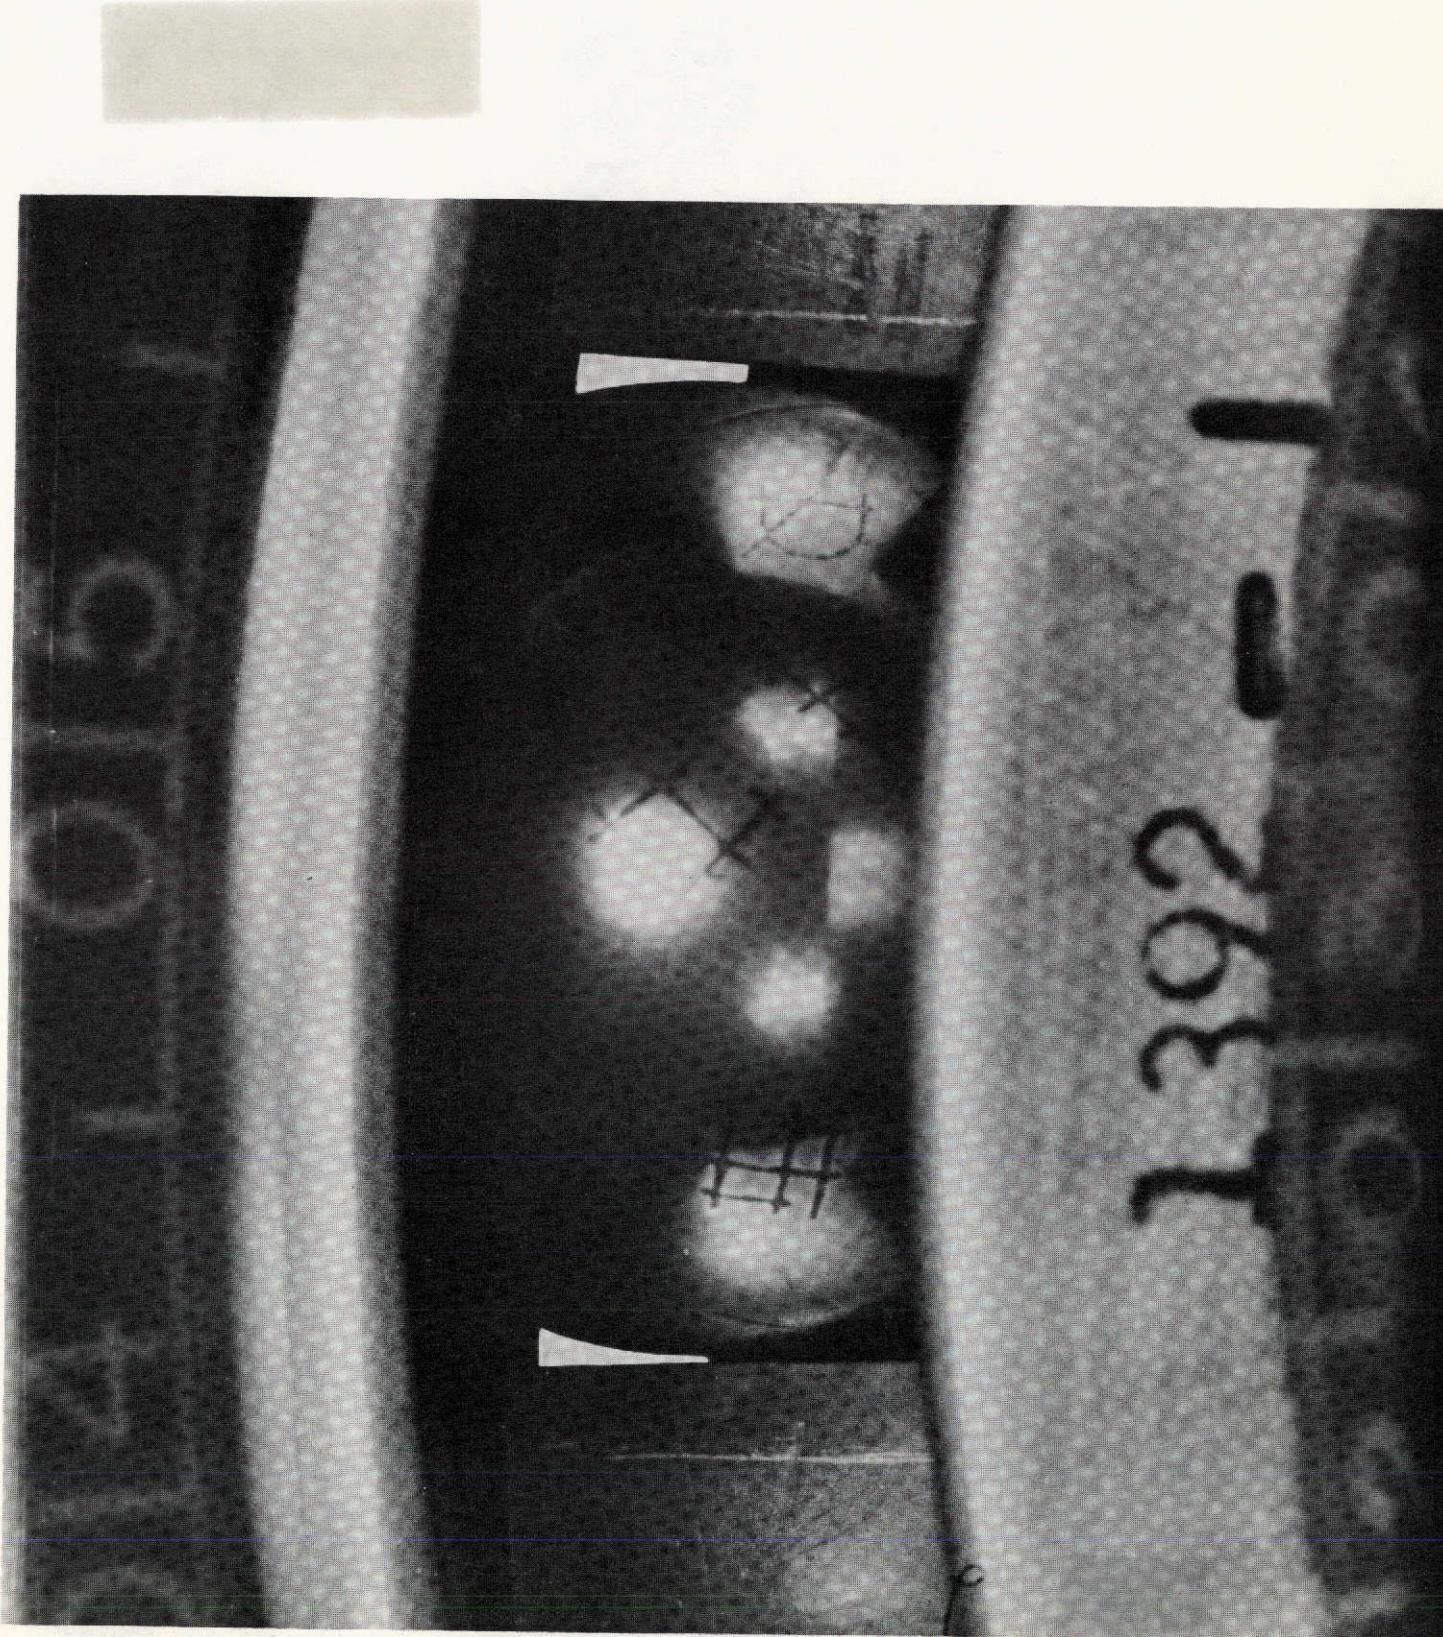

High Speed Motion Picture
Ball Bearing Tests
Figure -9-

This page is reproduced at the back of the report by a different reproduction method to provide better detail.


This page is reproduced at the back of the report by a different reproduction method to provide better detail.

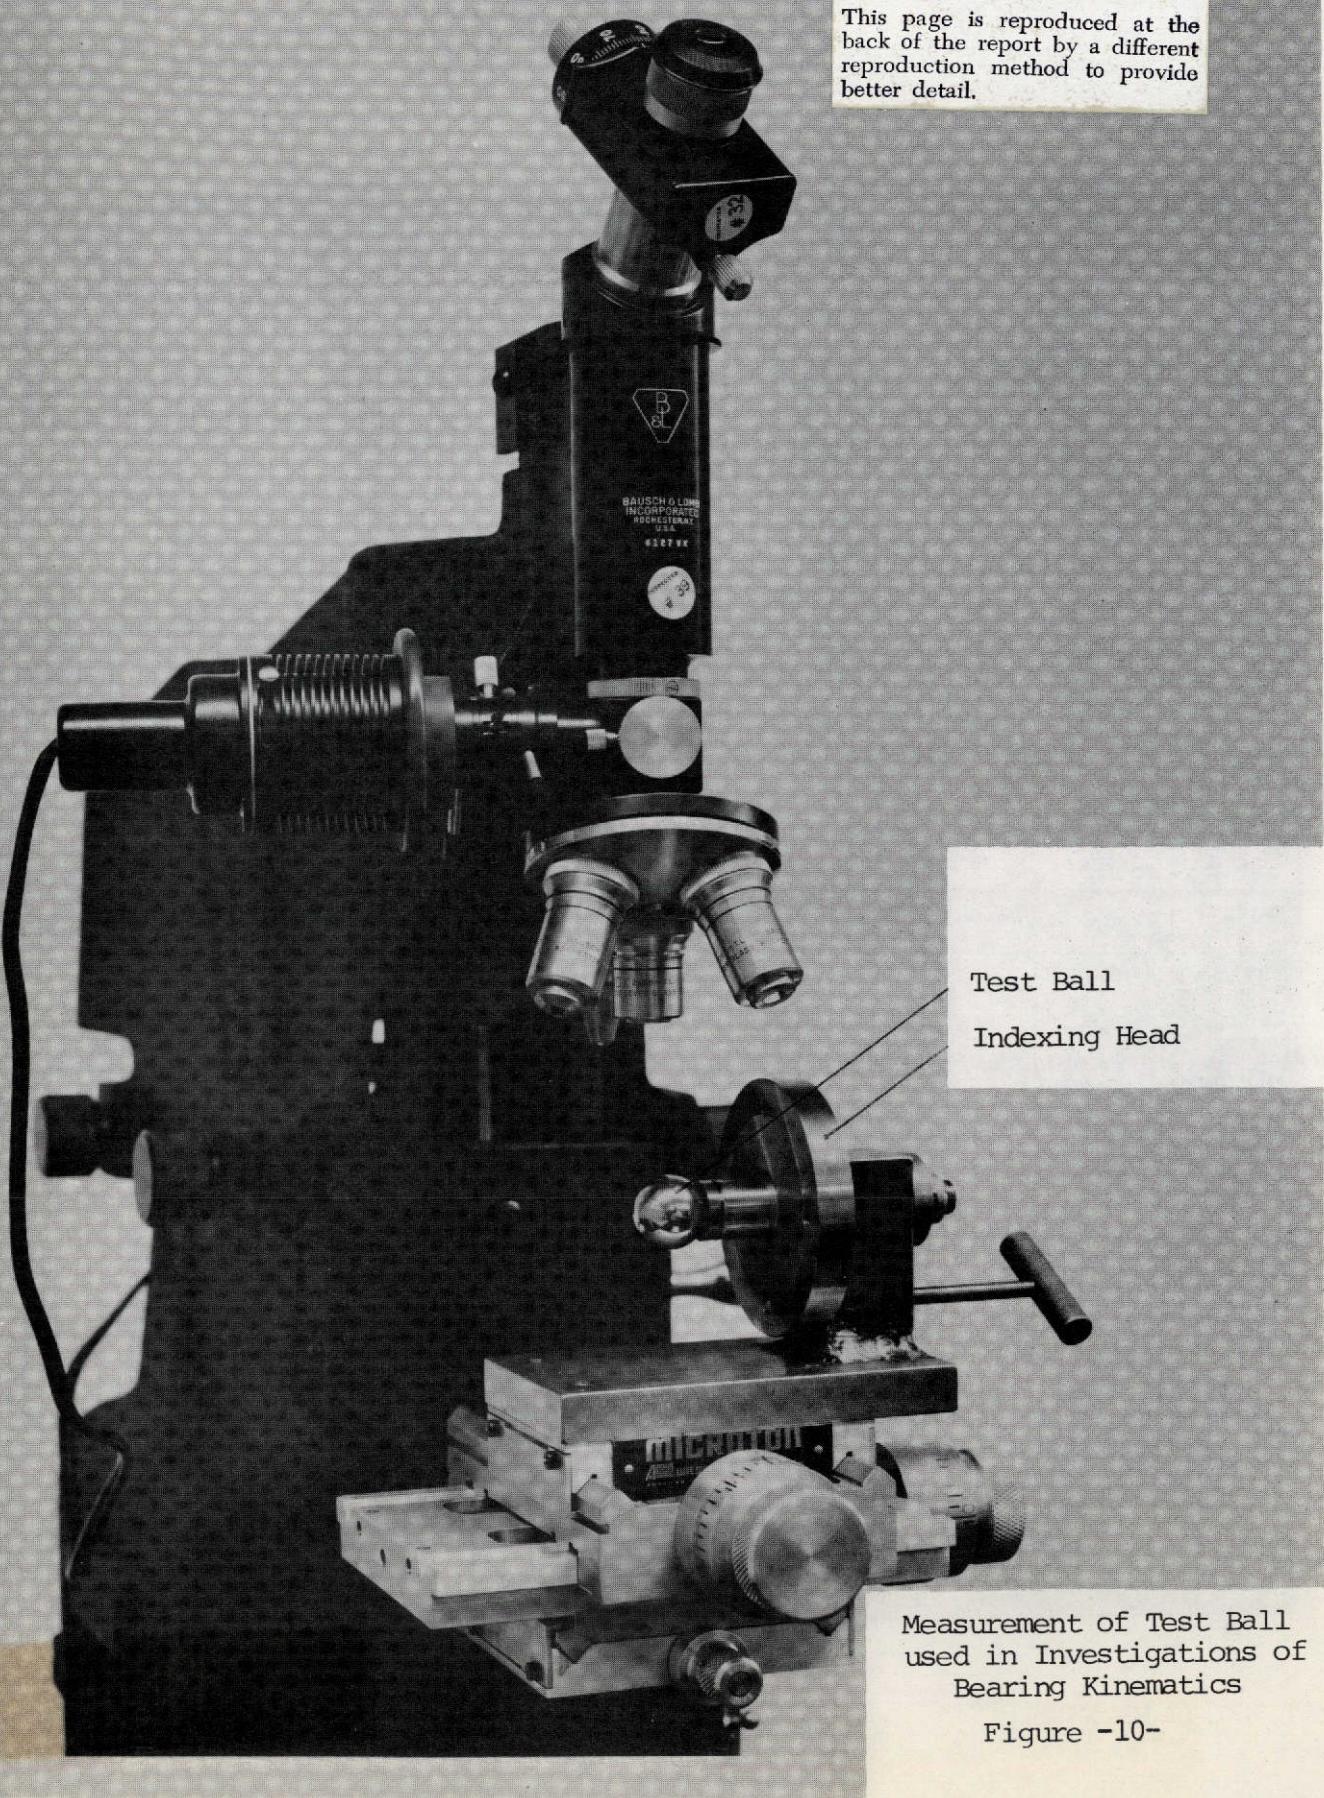

Test Ball
Indexing Head


Measurement of Test Ball
used in Investigations of
Bearing Kinematics

Figure -10-

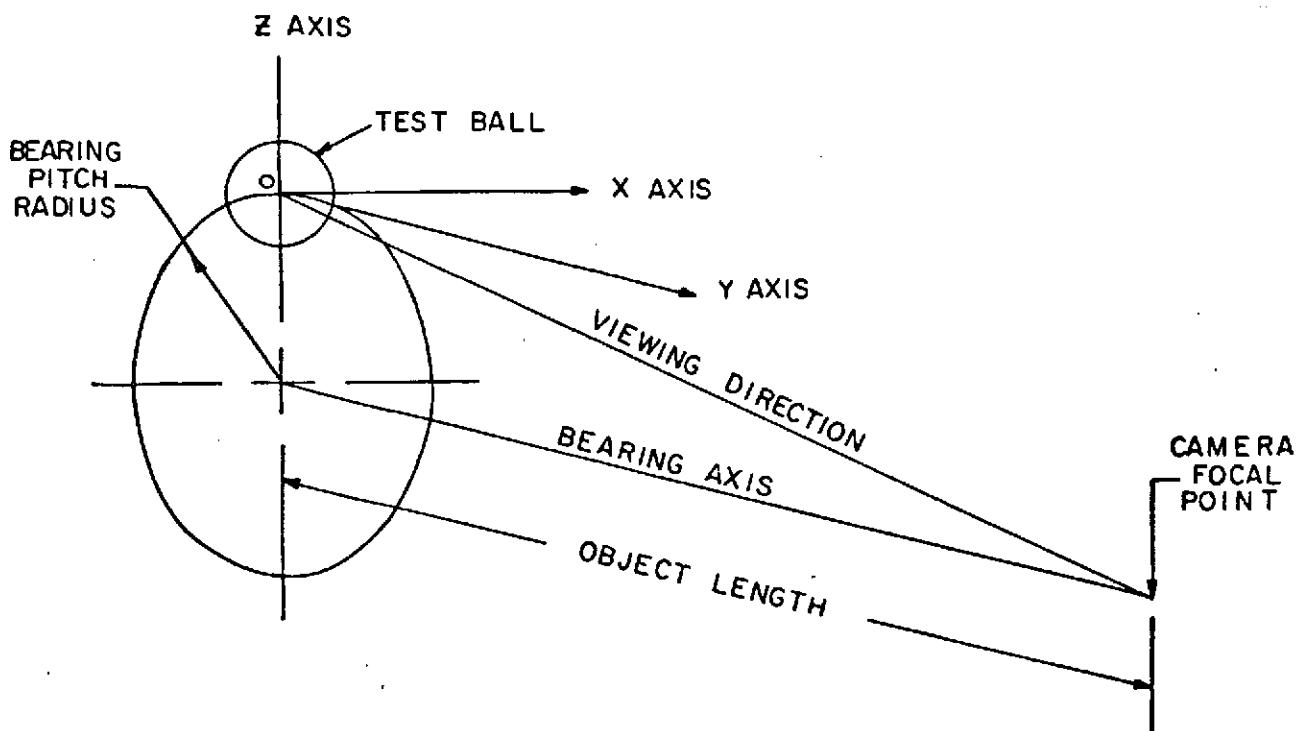


PITCH RADIUS COORDINATE SYSTEM

FIGURE 11A

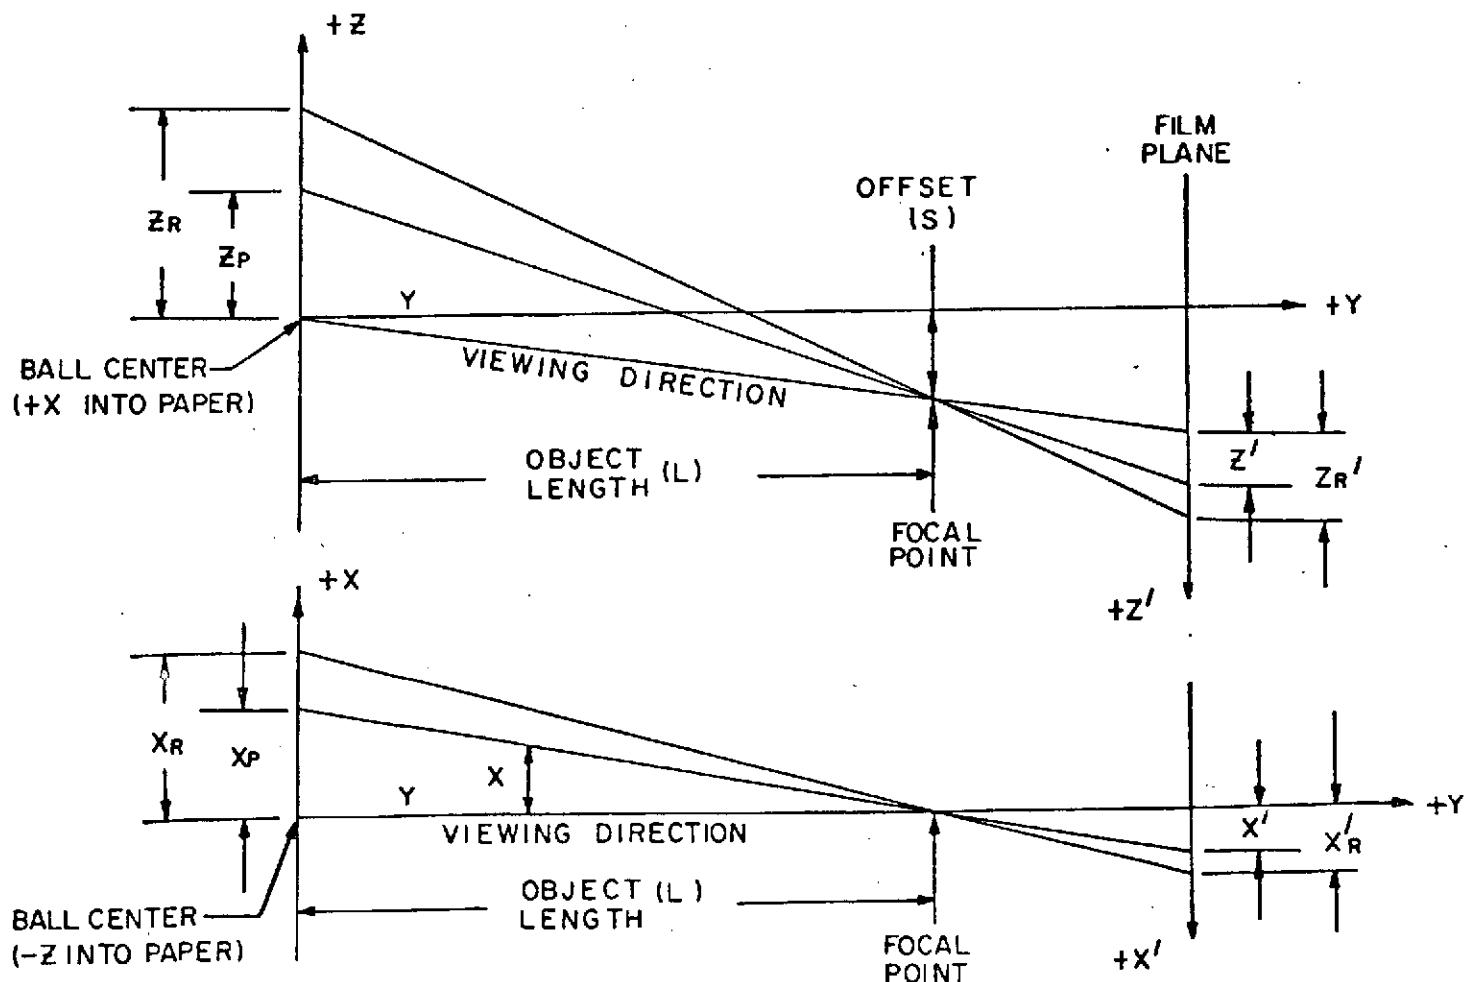

DETERMINATION OF COORDINATES FROM FILM

FIGURE 11B

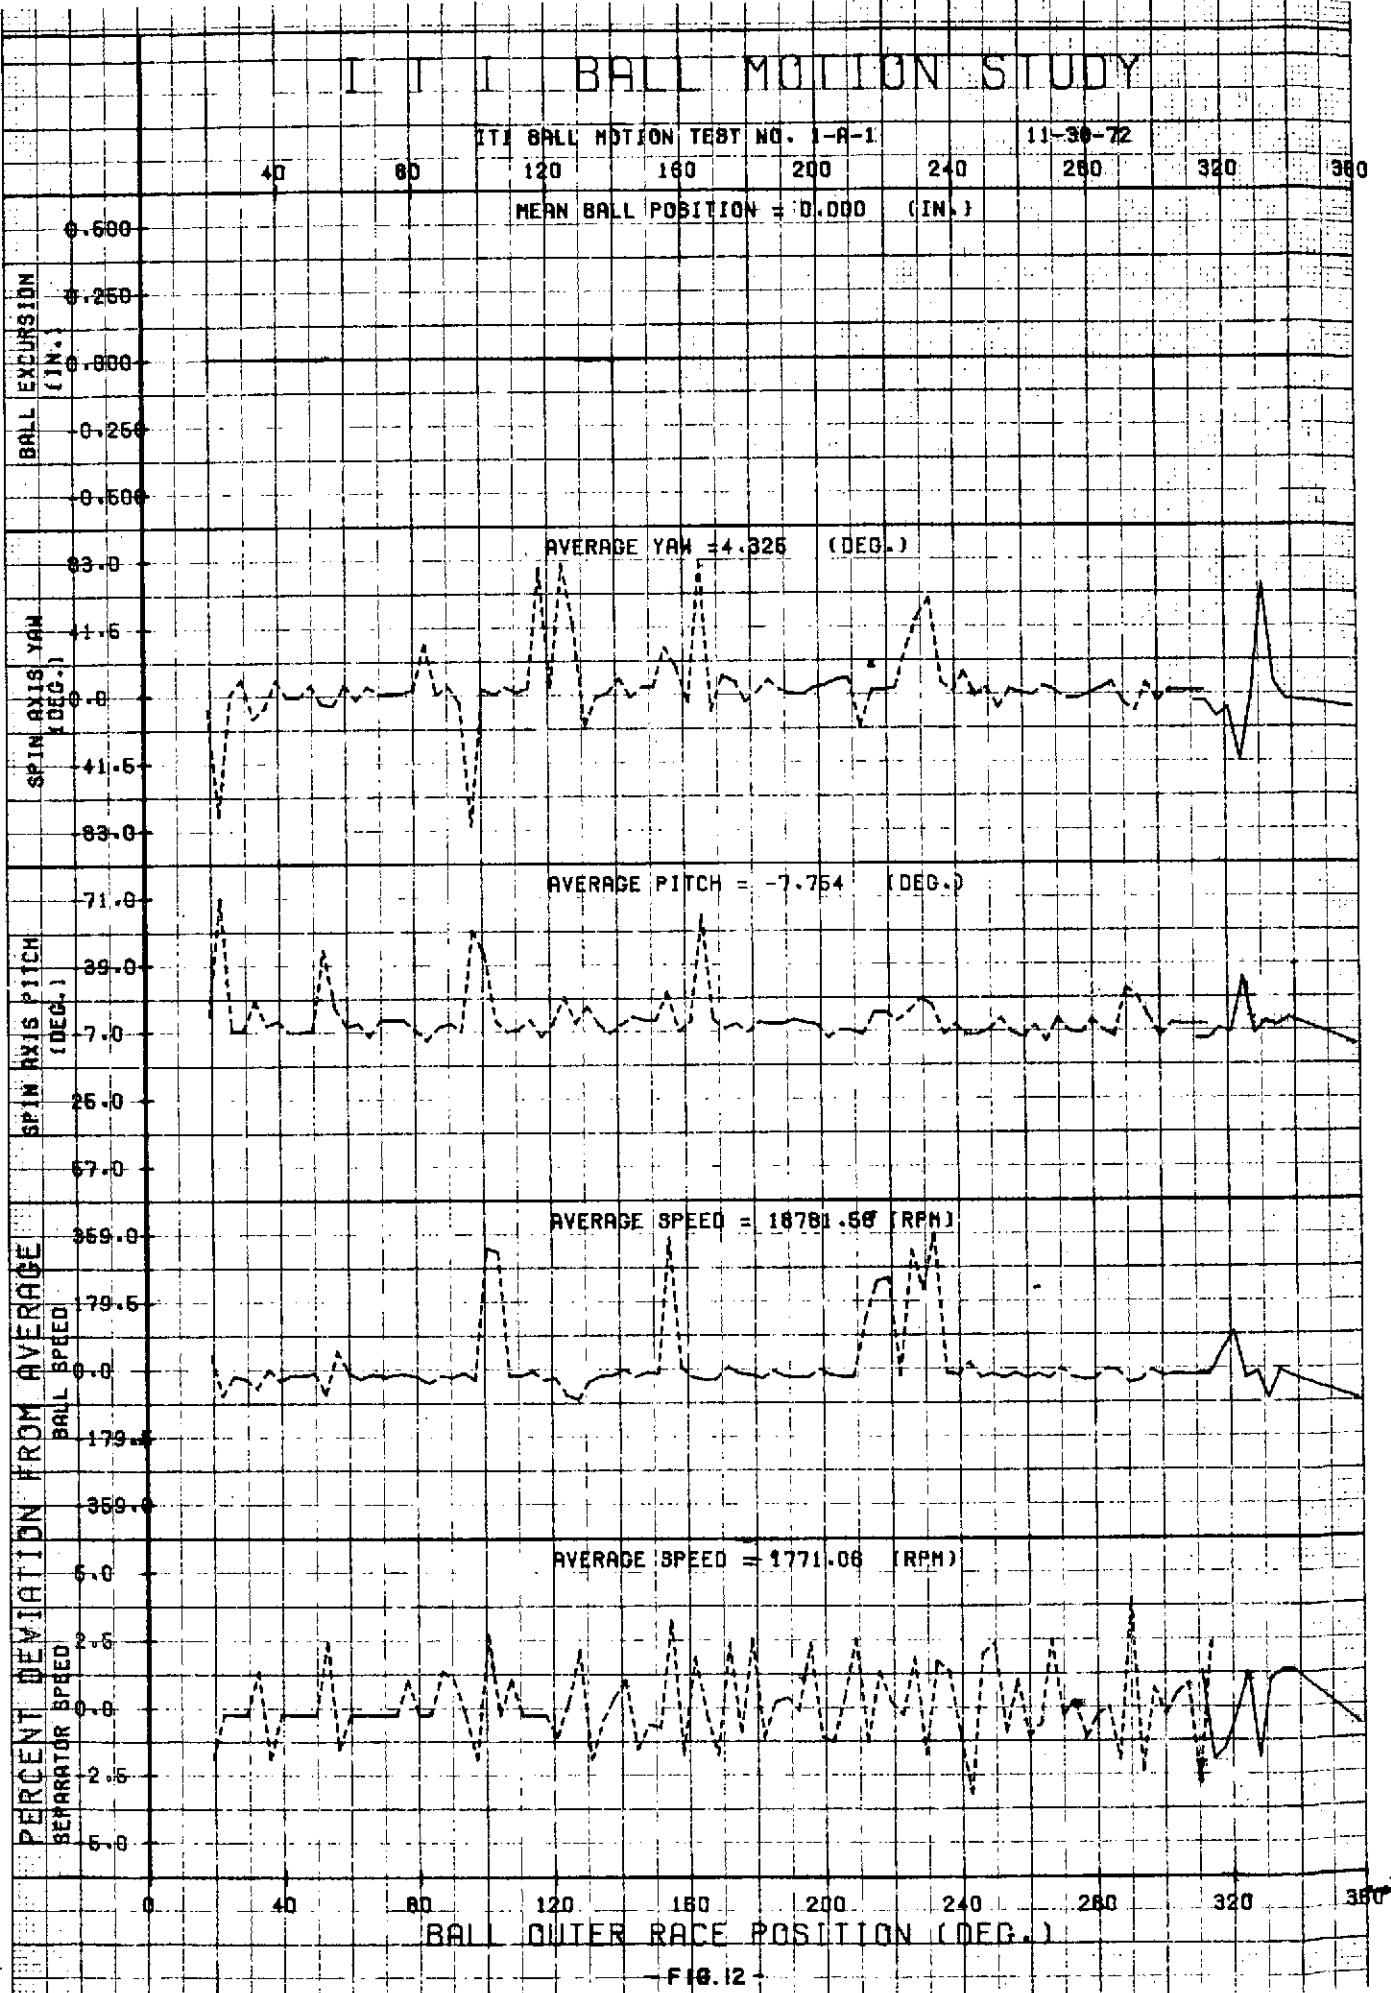

BALL MOTION TEST STUDY

ITI BALL MOTION TEST NO. I-A-2 (10/26/77)

40 80 120 160 200 240 280 320 360

MEAN BALL POSITION = 0.000 (IN.)

BALL EXPOSURE

0.500
0.250
0.000
-0.250
-0.500

AVERAGE YAW = 4.438 (DEG.)

SPIN RATE (deg./sec.)

14.5
0.0
-14.5
-28.0

AVERAGE PITCH = -26.816 (DEG.)

SPIN AXES PITCH

57.0
26.0
0.0
-26.0
-57.0

AVERAGE SPEED = [48125.06 (RPM) + 3] + 16042 (RPM)

AVERAGE FROM BALL SPEED

75.0
50.0
25.0
0.0
-25.0
-50.0
-75.0

AVERAGE SPEED = [5291.71 (RPM) + 3] + 17764 (RPM)

PERCENT DEVIATION IN SPED

5.0
3.0
1.0
-1.0
-3.0
-5.0

BALL OUTER RACE POSITION (DEG.)

I I I BAL MOTION STUDY

JTI BALL MOTION TEST NO. 1-A-3 (3/22/73)

40 80 120 160 200 240 280 320 360

MEAN BALL POSITION = 0.000 (IN.)

BALL EXCURSION
(IN.)

0.600
0.250
0.000
-0.250
-0.600

AVERAGE YAW = -3.511 (DEG.)

SPIN AXIS YAW
(DEG.)

82.0
41.0
-82.0
+72.0
36.5
-70.0
-34.5

AVERAGE PITCH = -1.465 (DEG.)

SPIN AXIS PITCH
(DEG.)

-861.0
-765.0
-661.0
-561.0
-461.0
-361.0
-261.0
-161.0
-61.0

AVERAGE SPEED = 32772.61 (RPM)

PERCENT DEVIATION FROM AVERAGE
BALL SPEED

861.0
765.0
661.0
561.0
461.0
361.0
261.0
161.0
61.0

AVERAGE SPEED = 3640.78 (RPM)

PERCENT DEVIATION FROM AVERAGE
SPINATOR SPEED

6.5
0.0
-6.5
-13.0

BALL OUTER RACE POSITION (DEG.)

0 40 80 120 160 200 240 280 320 360

BALL MOTION STUDY

ITI BALL MOTION TEST NO. I-R-4 U3422781

40 80 120 160 200 240 280 320 360

BALL EXCURSION
IN.

0.500
0.250
0.000
-0.250
-0.500

MEAN BALL POSITION = 0.000 (IN.)

AVERAGE YAW = 0.108 (DEG.)

SPIN YAW
(DEG.)

80.0
40.0
0.0
-40.0
-80.0

AVERAGE PITCH = -29.242 (DEG.)

SPIN PITCH
(DEG.)

52.0
29.0
0.0
-29.0
-52.0

AVERAGE SPEED = 30747.05 (RPM)

AVERAGE
BALL SPEED

324.0
162.0
0.0
-162.0
-324.0

AVERAGE SPEED = 3523.66 (RPM)

PERCENT DEVIATION FROM
SEPARATOR SPEED


13.0
6.5
0.0
-6.5
-13.0

0 40 80 120 160 200 240 280 320 360
BALL OUTER RACE POSITION (DEG.)

- FIG 15 -

8
7
6

-35-

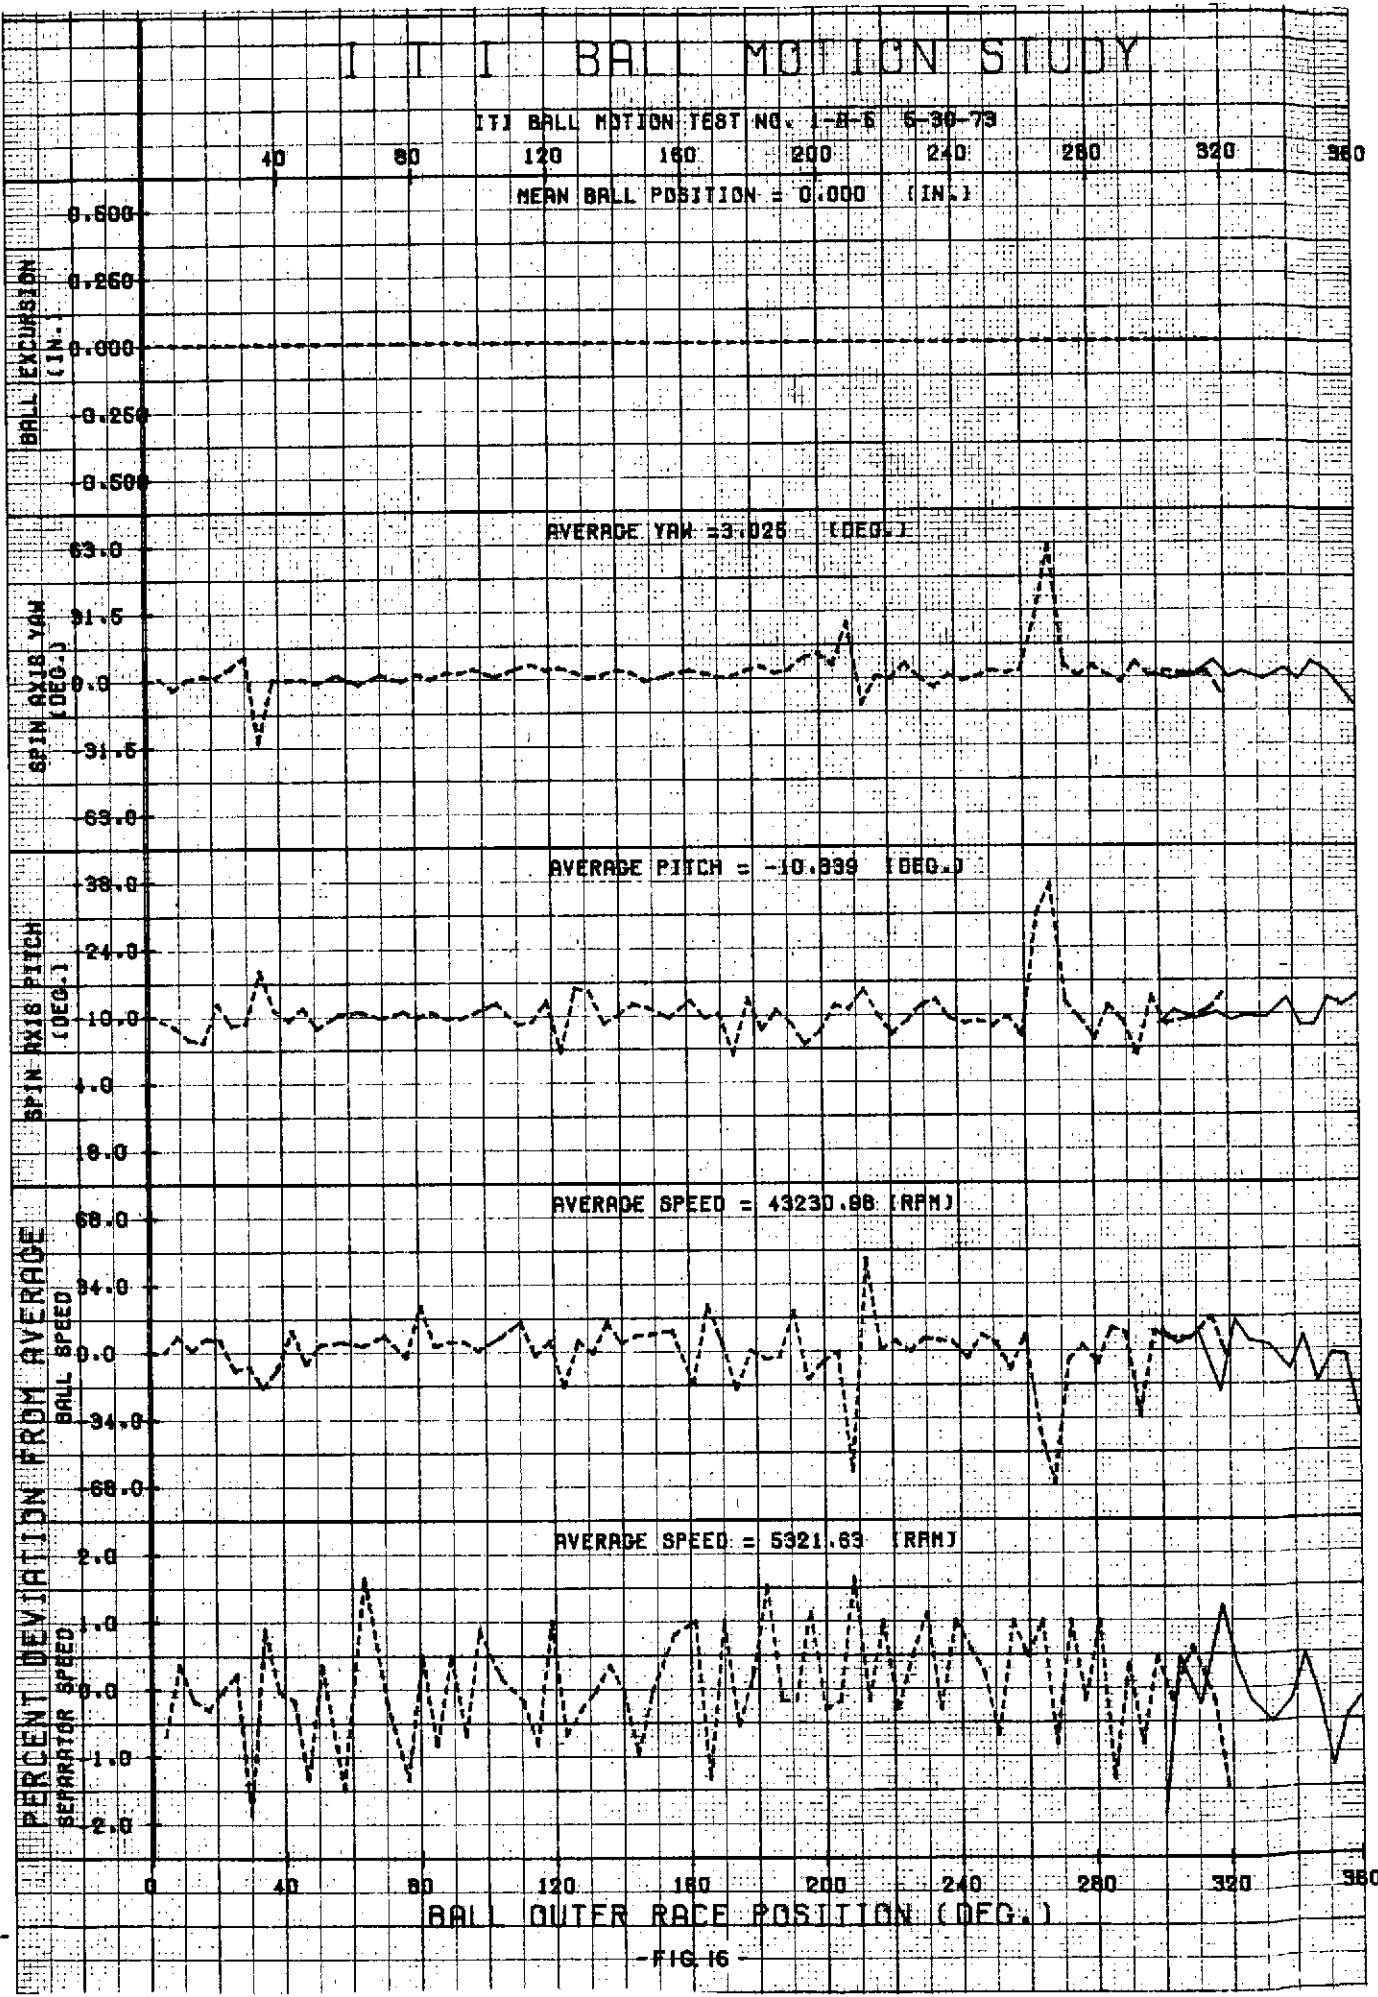


BALL MOTION STUDY

ITI BALL MOTION TEST NO. 1-R-8

5-5-73

40 80 120 160 200 240 280 320 360

MEAN BALL POSITION = 0.000 (IN.)

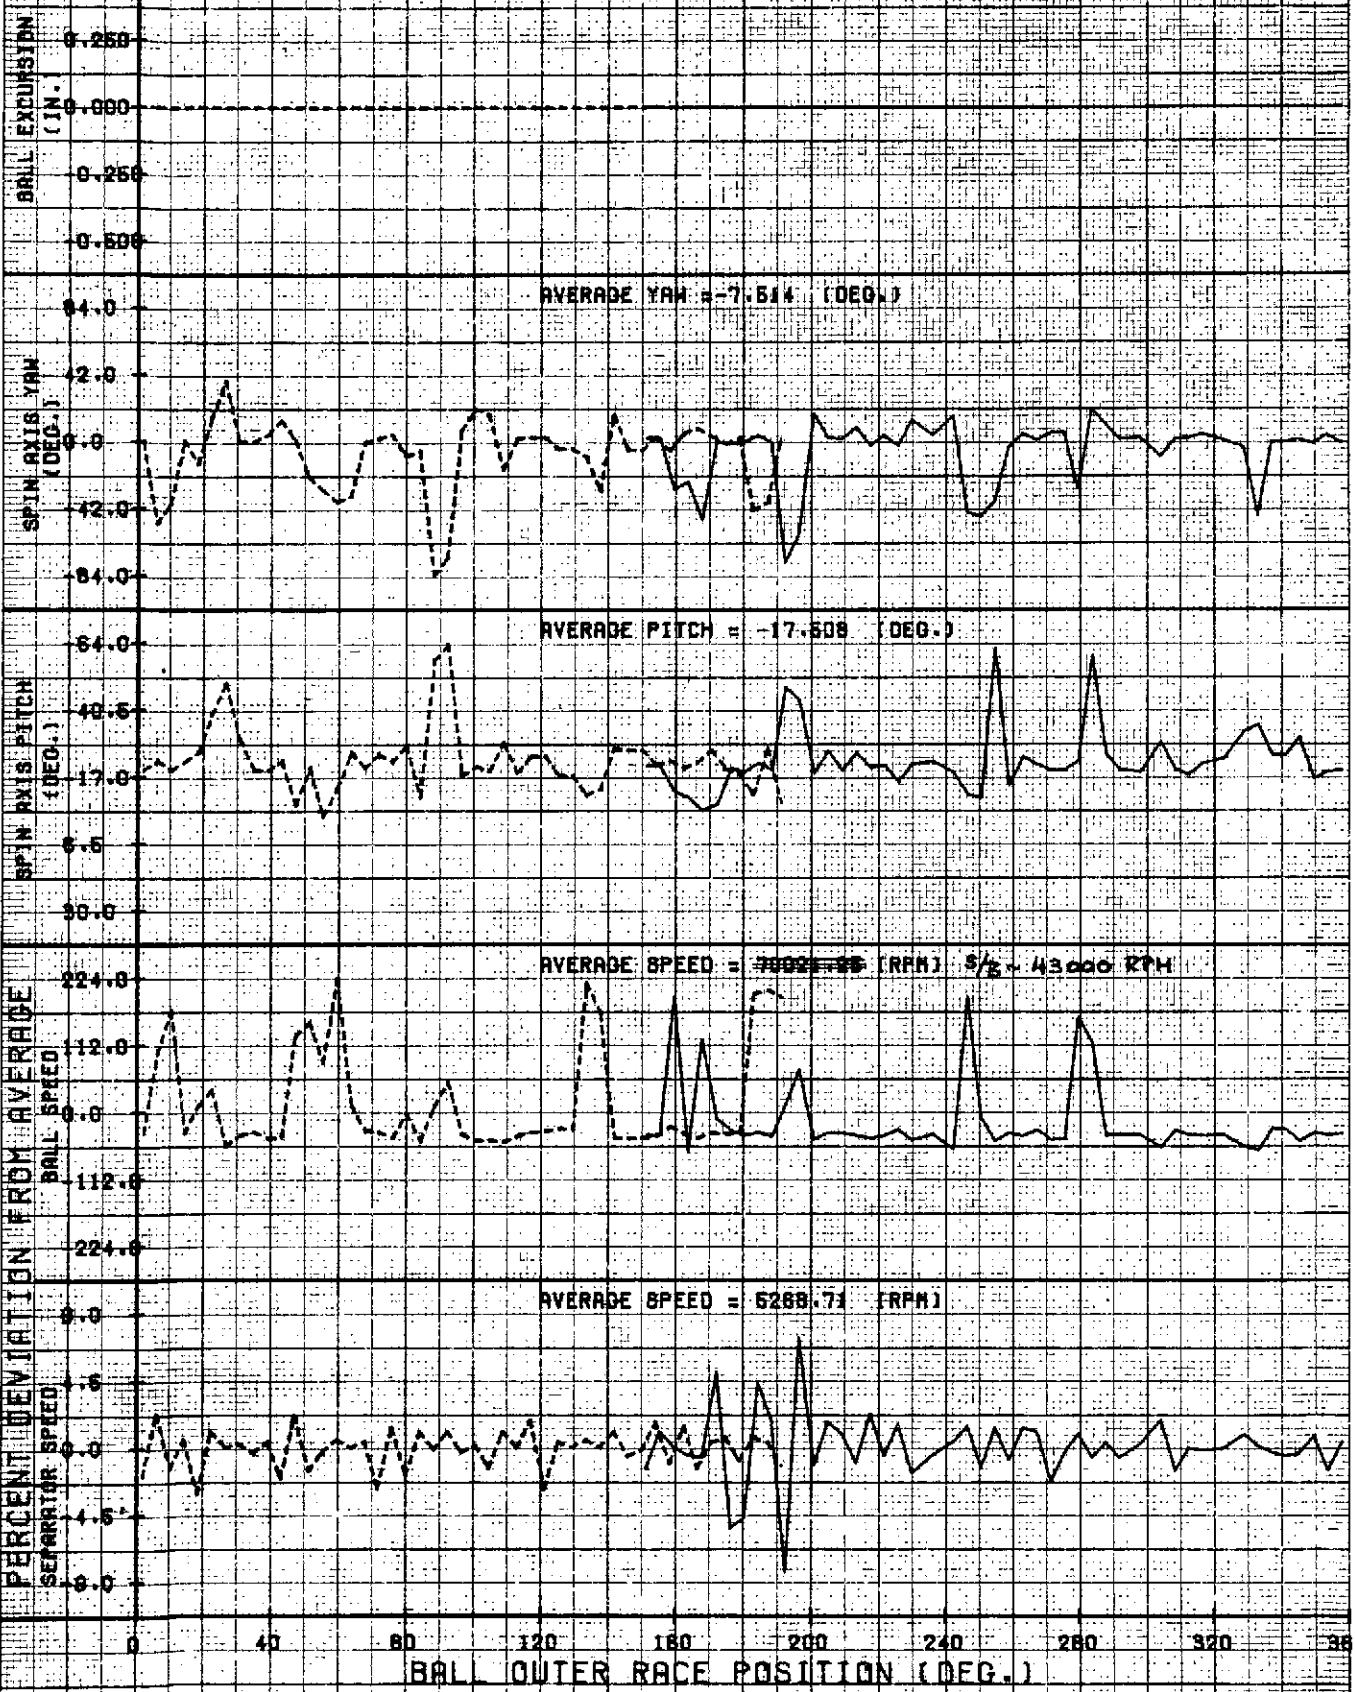

0 40 80 120 160 200 240 280 320 360
BALL OUTER RACE POSITION (DEG.)

BAL MOTION STUDY

ITI BALL MOTION TEST NO. 1-B-1

2-23-73

40 80 120 160 200 240 280 320 360

MEAN BALL POSITION = 0.000 (IN.)

BALL POSITION

0.500

0.250

0.000

-0.250

-0.500

-0.750

-0.500

-0.250

0.000

0.250

0.500

0.750

AVERAGE YAW = 0.118 (DEG.)

SPIN AXIS YAW

44.5

40.0

38.5

35.0

31.5

28.0

25.5

23.0

19.5

17.0

14.5

12.0

9.5

7.0

4.5

2.0

-0.5

-3.0

-5.5

-8.0

-10.5

-13.0

-15.5

-18.0

-20.5

-23.0

-25.5

-28.0

-30.5

-33.0

-35.5

-38.0

-40.5

-43.0

-45.5

-48.0

-50.5

-53.0

-55.5

-58.0

-60.5

-63.0

-65.5

-68.0

-70.5

-73.0

-75.5

-78.0

-80.5

-83.0

-85.5

-88.0

-90.5

-93.0

AVERAGE PITCH = -8.158 (DEG.)

SPIN AXIS PITCH

43.6

40.1

36.6

33.1

29.6

26.1

22.6

19.1

15.6

12.1

8.6

5.1

1.6

-2.3

-5.8

-8.3

-10.8

-13.3

-15.8

-18.3

-20.8

-23.3

-25.8

-28.3

-30.8

-33.3

-35.8

-38.3

-40.8

-43.3

-45.8

-48.3

-50.8

-53.3

-55.8

-58.3

-60.8

-63.3

-65.8

-68.3

-70.8

-73.3

-75.8

AVERAGE SPEED = 20271.18 (RPM)

AVERAGE SPEED

325.0

322.5

320.0

317.5

315.0

312.5

310.0

307.5

305.0

302.5

300.0

297.5

295.0

292.5

290.0

287.5

285.0

282.5

280.0

277.5

275.0

272.5

270.0

267.5

265.0

262.5

260.0

257.5

255.0

252.5

250.0

AVERAGE SPEED = 1628.37 (RPM)

PERCENT DEVIATION

-1.0

-0.8

-0.6

-0.4

-0.2

0.0

0.2

0.4

0.6

0.8

1.0

1.2

1.4

1.6

1.8

2.0

2.2

2.4

2.6

2.8

3.0

3.2

3.4

3.6

3.8

4.0

4.2

4.4

4.6

4.8

5.0

5.2

5.4

5.6

5.8

6.0

6.2

6.4

6.6

6.8

7.0

7.2

7.4

7.6

7.8

8.0

8.2

8.4

8.6

8.8

9.0

9.2

9.4

9.6

9.8

10.0

10.2

10.4

10.6

10.8

11.0

11.2

11.4

11.6

11.8

12.0

12.2

12.4

12.6

12.8

13.0

13.2

13.4

13.6

13.8

14.0

14.2

14.4

14.6

14.8

15.0

15.2

15.4

15.6

15.8

16.0

16.2

16.4

16.6

16.8

17.0

17.2

17.4

17.6

17.8

18.0

18.2

18.4

18.6

18.8

19.0

19.2

19.4

19.6

19.8

20.0

20.2

20.4

20.6

20.8

21.0

21.2

21.4

21.6

21.8

22.0

22.2

22.4

22.6

22.8

23.0

23.2

23.4

23.6

23.8

24.0

24.2

24.4

24.6

24.8

25.0

25.2

25.4

25.6

25.8

26.0

26.2

26.4

26.6

26.8

27.0


27.2

III BALL MOTION STUDY

ITI BALL MOTION TEST NO. 3-8-2

40 80 120 160 200 240 280 320 360

MEAN BALL POSITION = 0.000 (IN.)

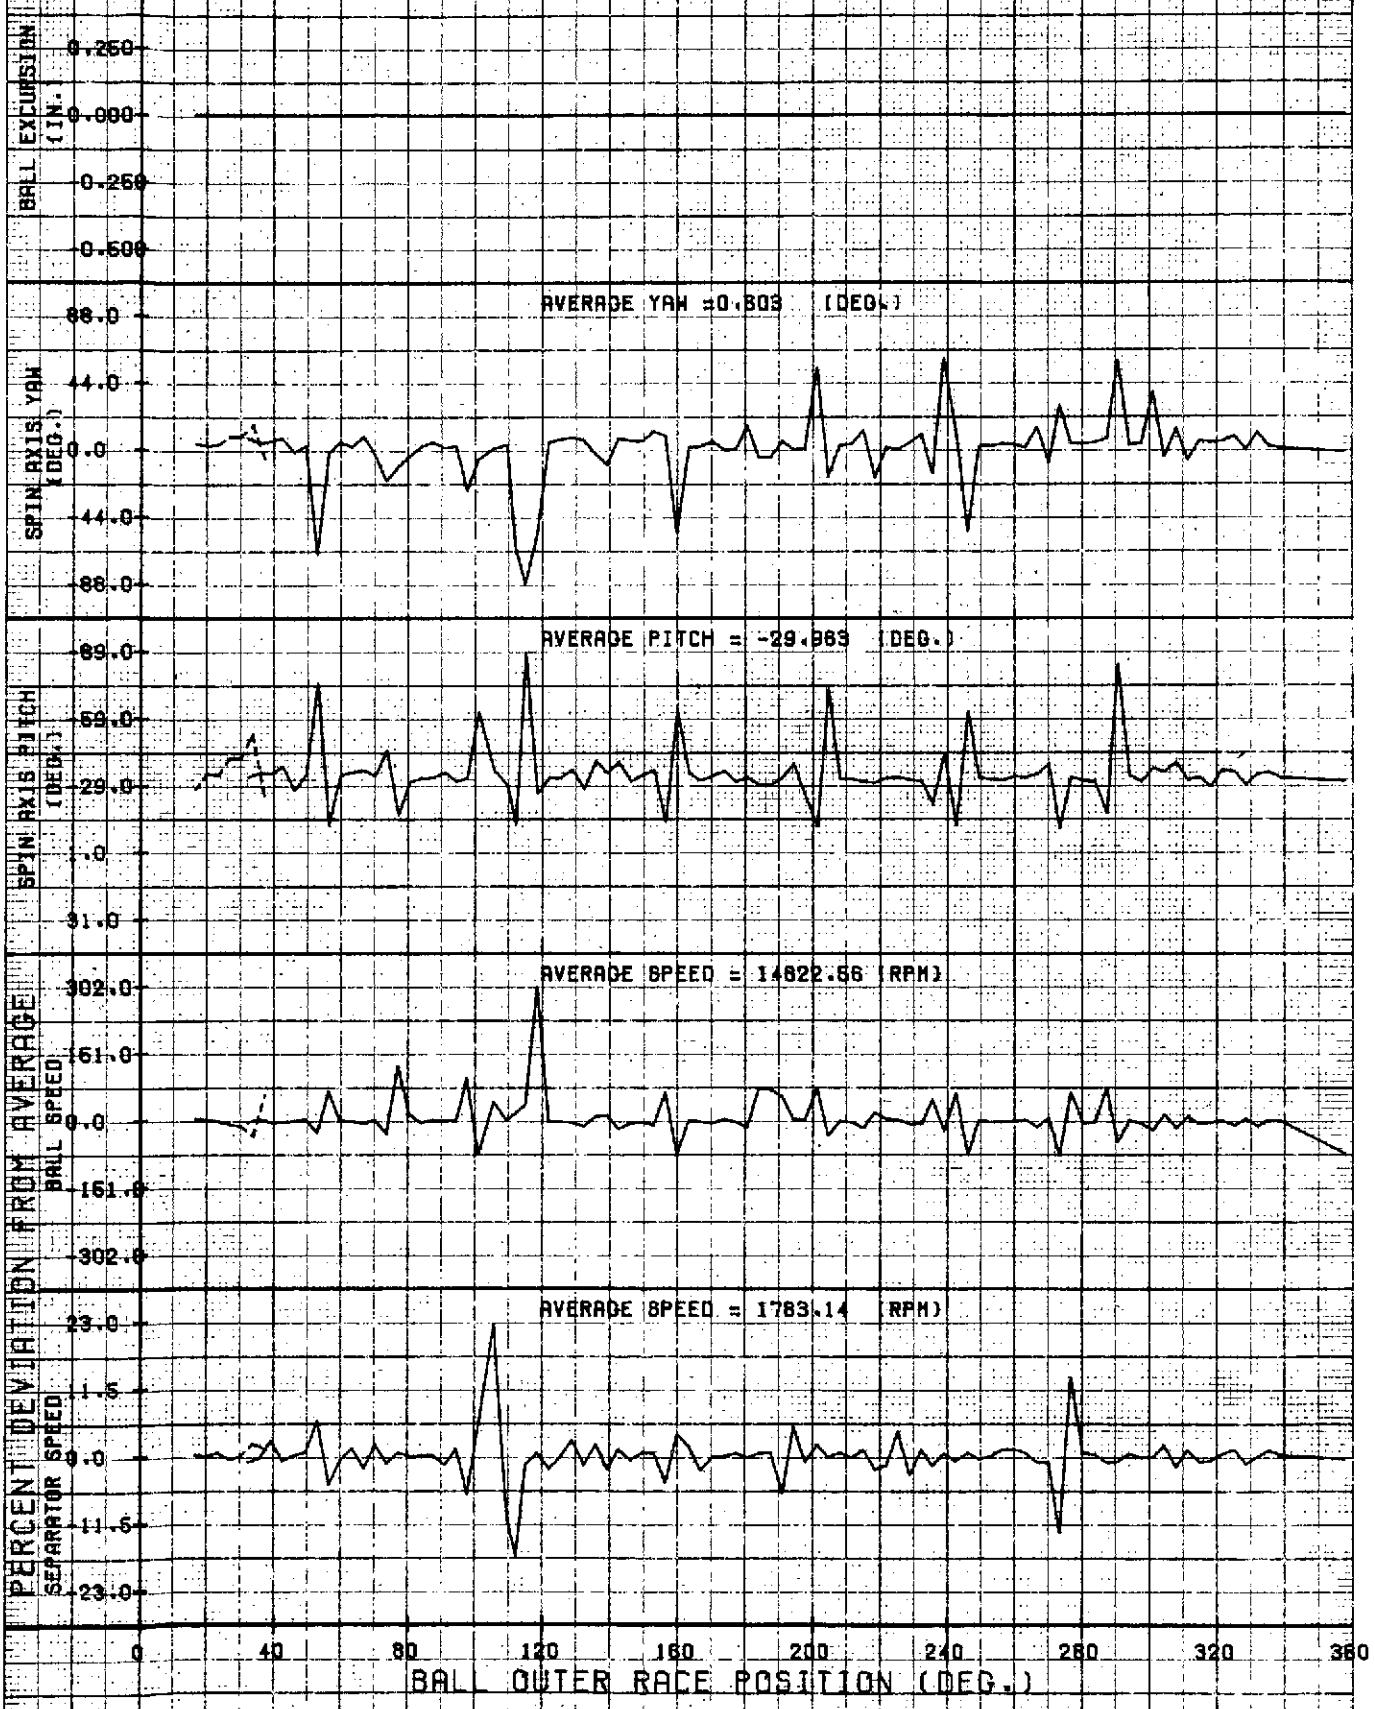

BH MOTION STUDY

ITI BALL MOTION TEST NO. 1-B-3

40 80 120 160 200 240 280 320 360

MEAN BALL POSITION = 0.000 (IN.)

0.500

0.250

0.000

-0.250

-0.500

AVERAGE YAW = 2.551 (DEG.)

86.0

52.6

0.0

-42.6

-86.0

AVERAGE PITCH = -7.276 (DEG.)

70.0

43.0

19.0

5.0

-5.0

AVERAGE SPEED = 61373.38 (RPM)

-17.0

-58.5

-100.0

-158.5

-217.0

AVERAGE SPEED = 6636.88 (RPM)

-3.0

-6.5

-10.0

-13.0

-40.

40

80

120

160

200

240

280

320

360

BALL OUTER RACE POSITION (DEG.)


FIG. 20

II BALL MOTION STUDY


JTI BALL MOTION TEST NO. 1-B-4 6-23-73

40 80 120 160 200 240 280 320 360

MERN BALL POSITION = 0.000 (IN.)

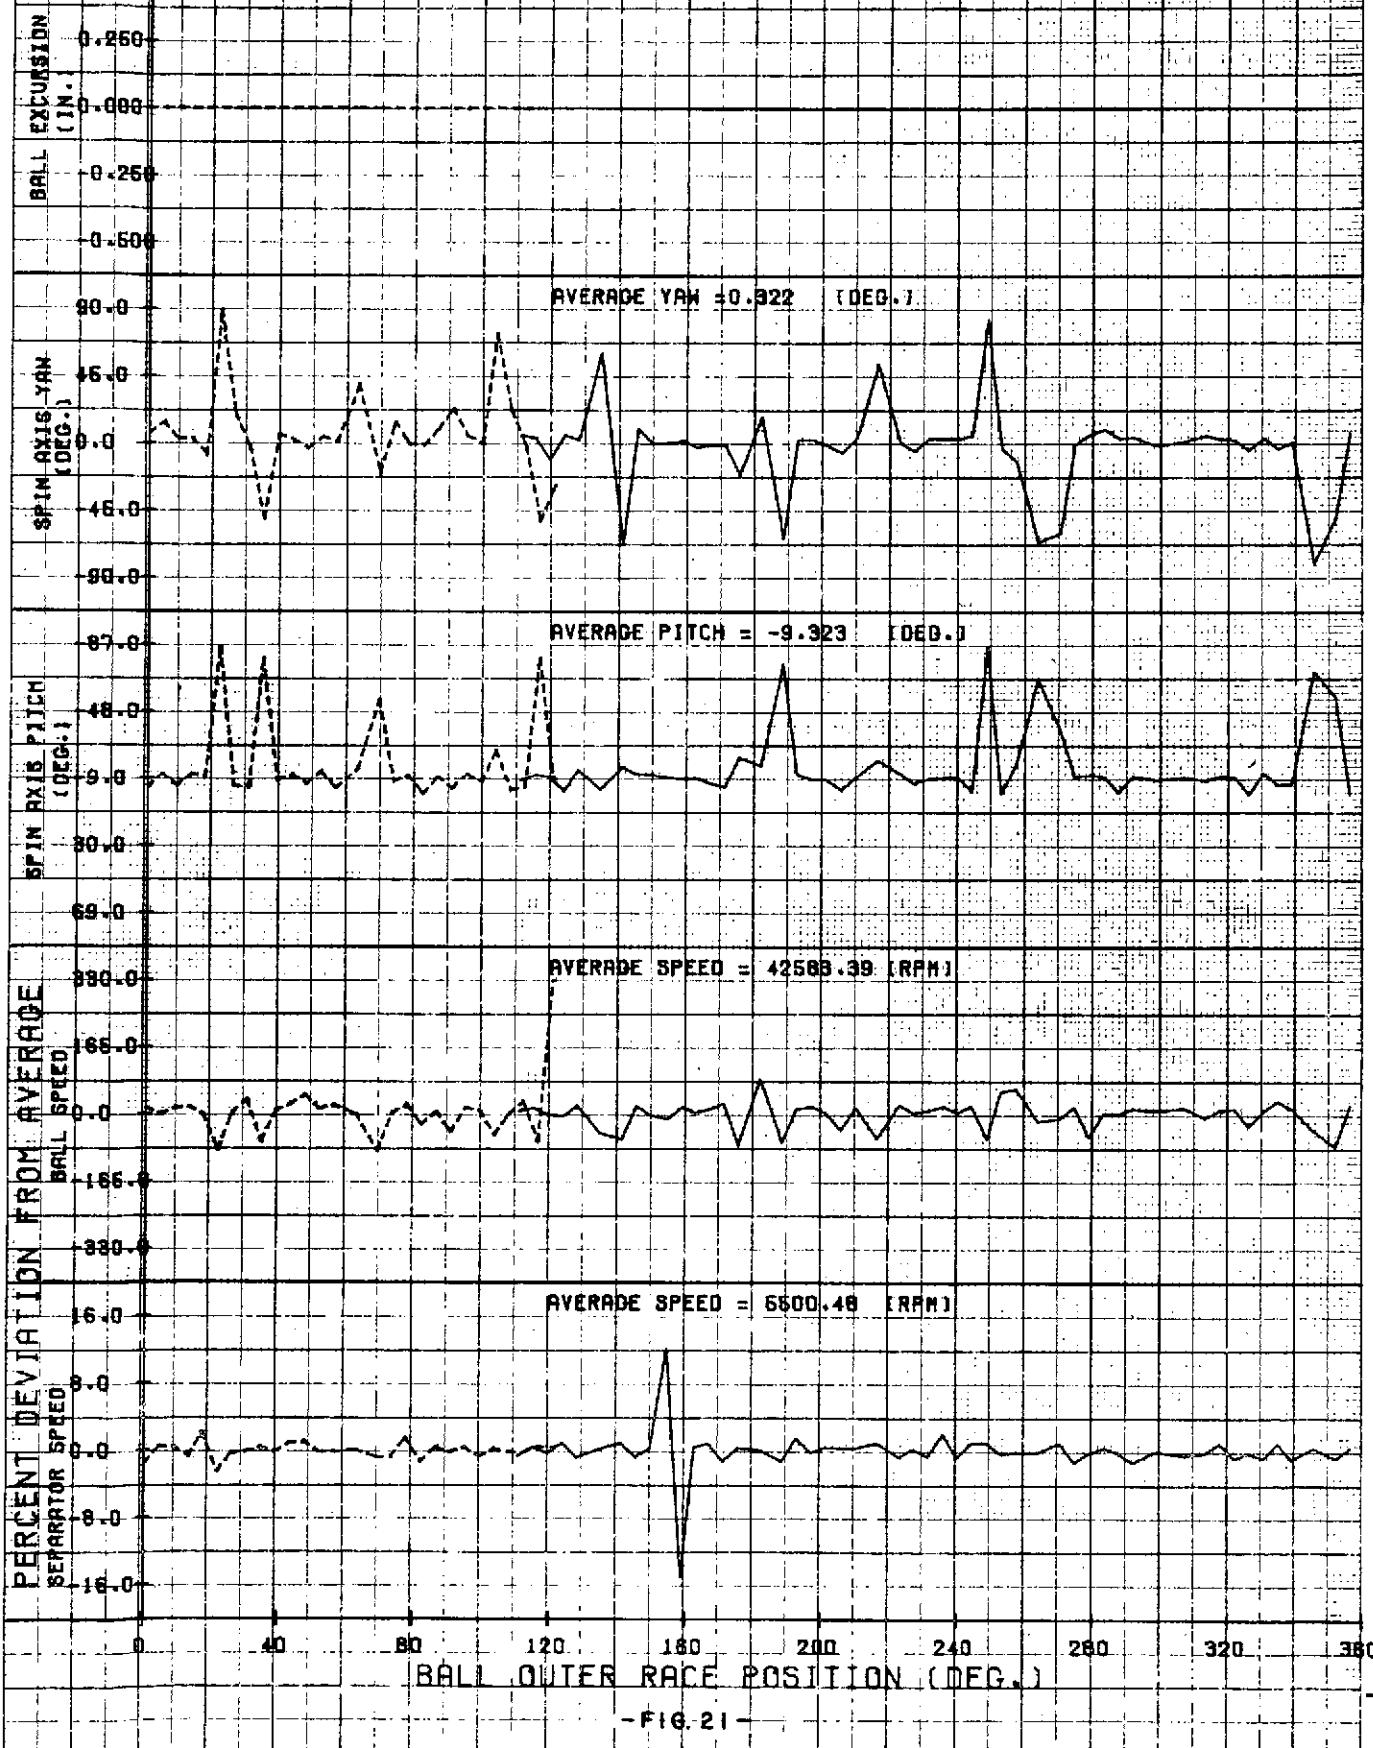


Ball Rotational Speed vs. Inner Ring Speed

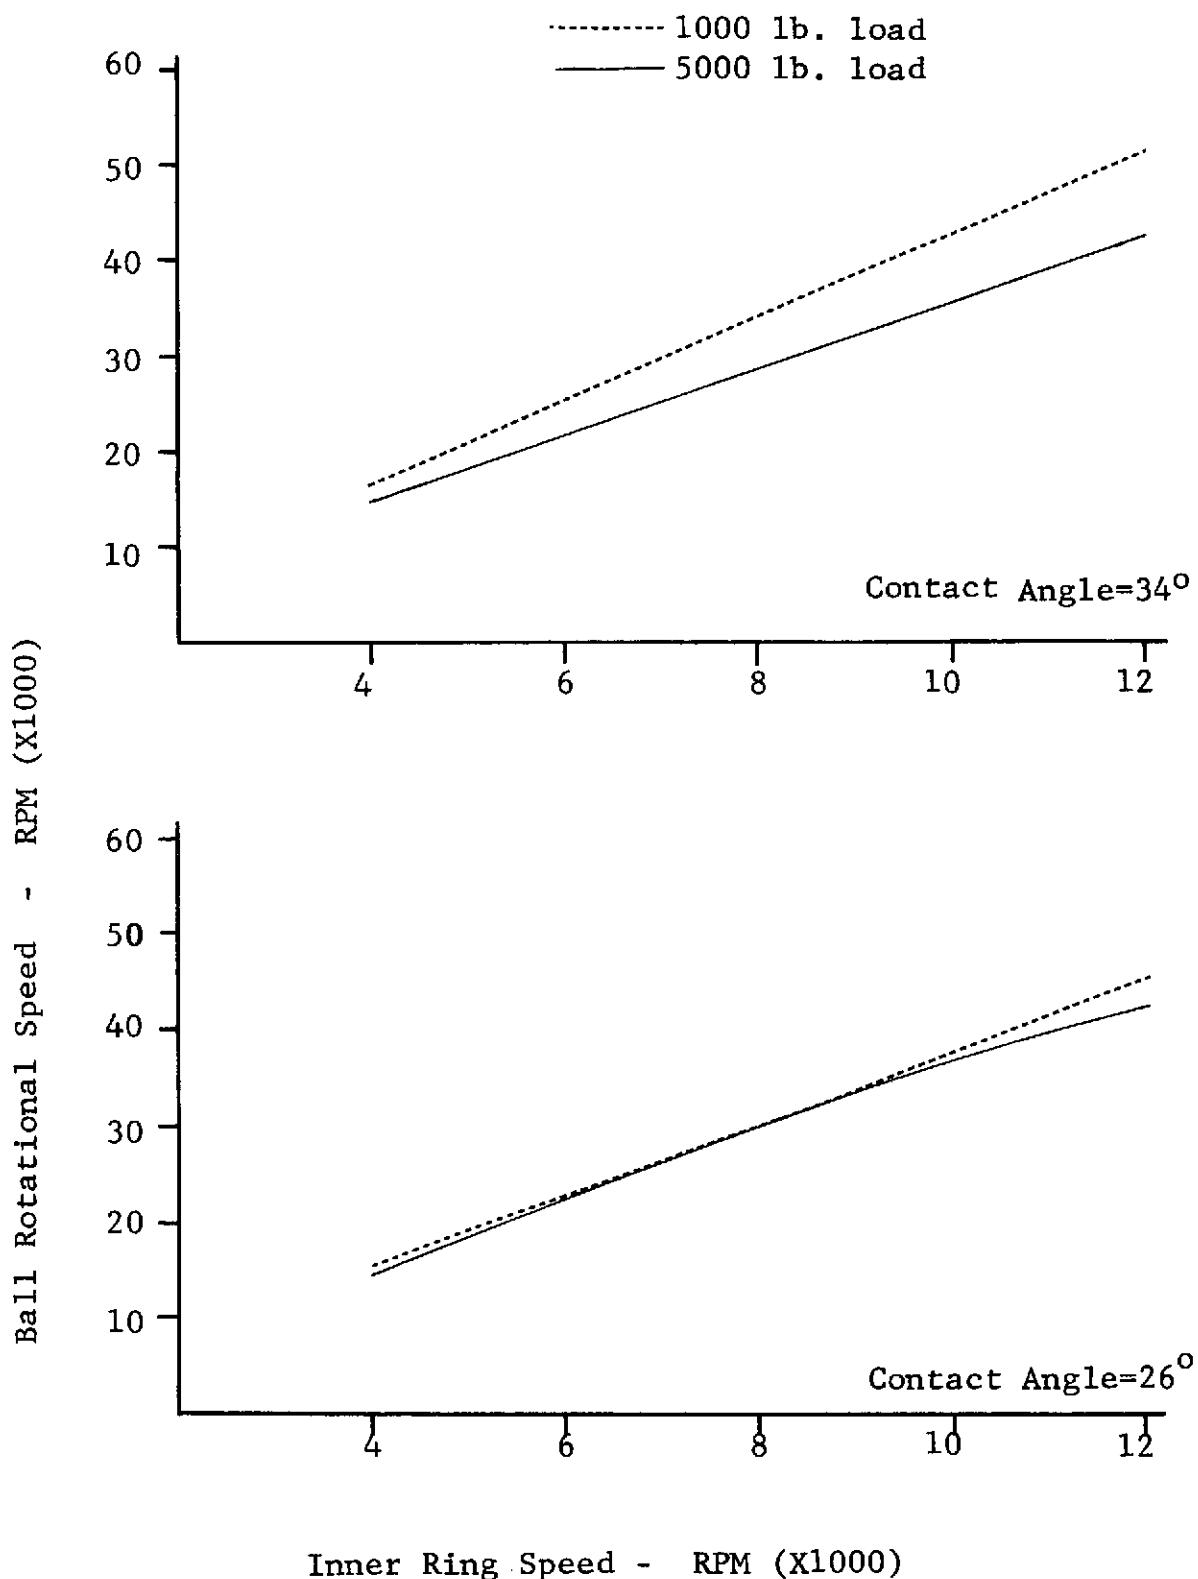

Inner Ring Speed - RPM (X1000)

Figure -22-



Separator Speed vs. Inner Ring Speed


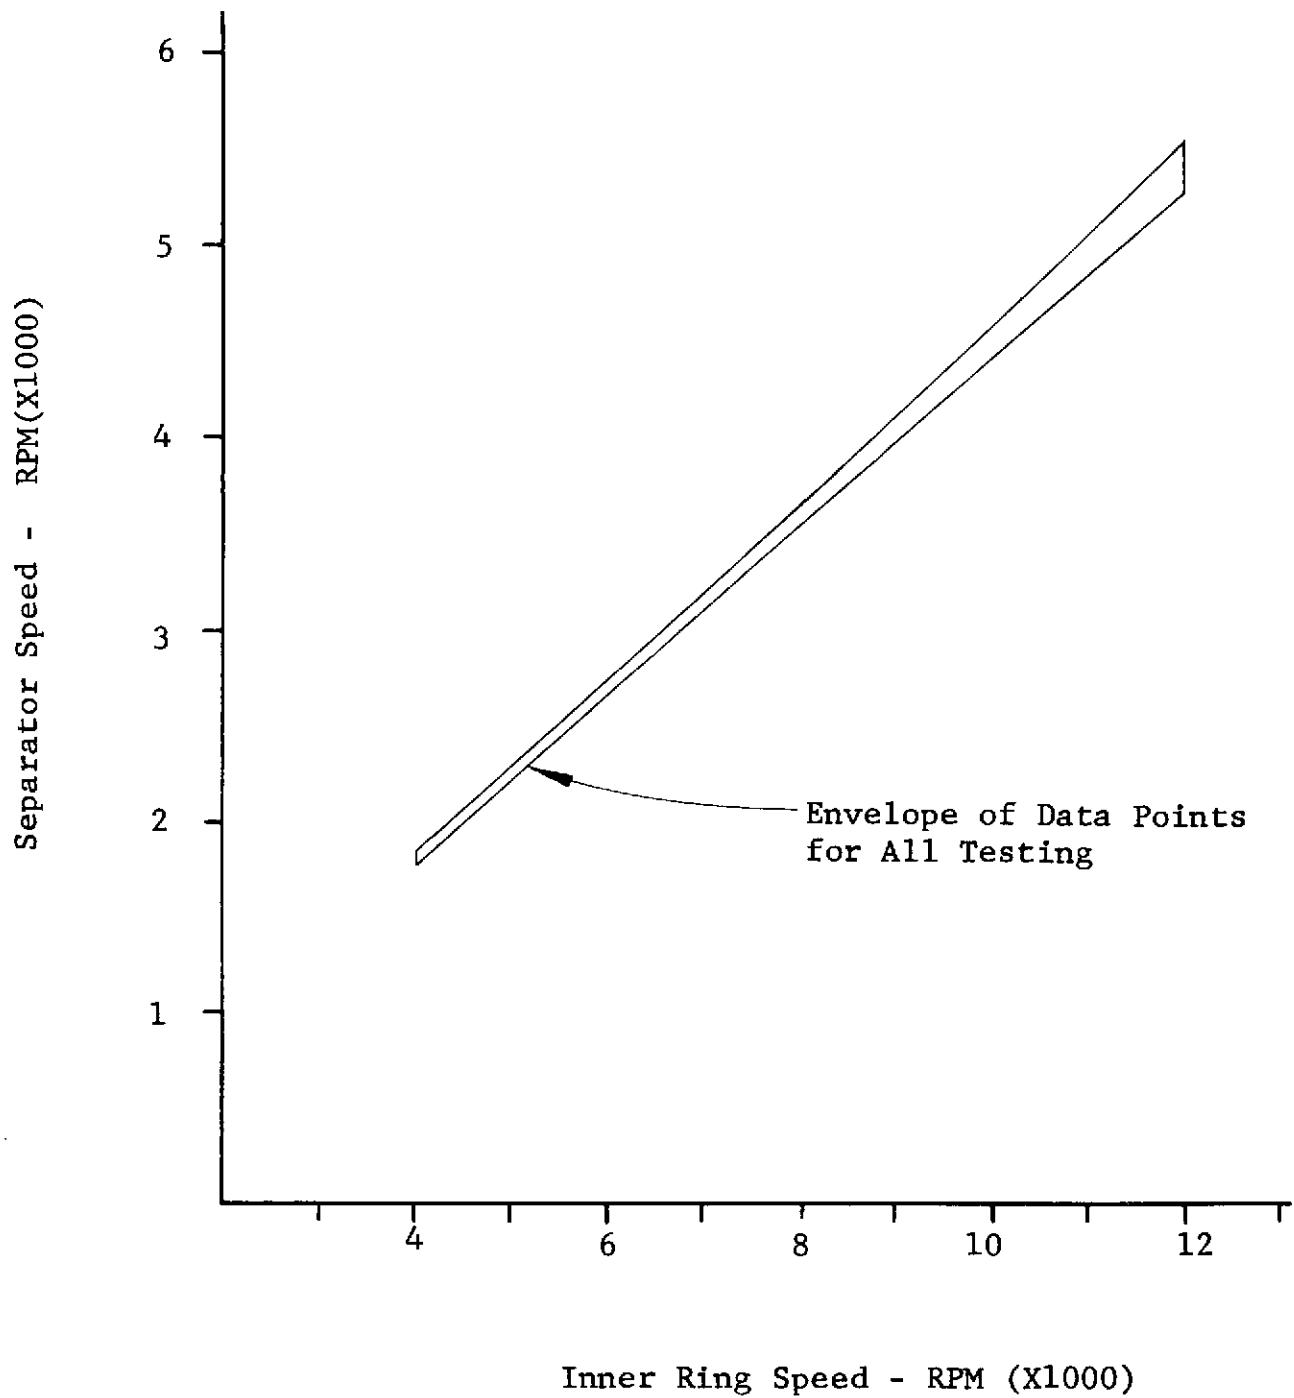


Figure -23-



INDUSTRIAL TECTONICS, INC., RESEARCH AND DEVELOPMENT DIVISION

**Ball Attitude Angles as a Function of
Inner Ring Speed and Thrust Load**

○ Pitch Angle, 1,000 lbs.load	□ Yaw Angle, 1000 lbs. load
○ Pitch Angle, 5,000 lbs.load	△ Yaw Angle, 5000 lbs. load

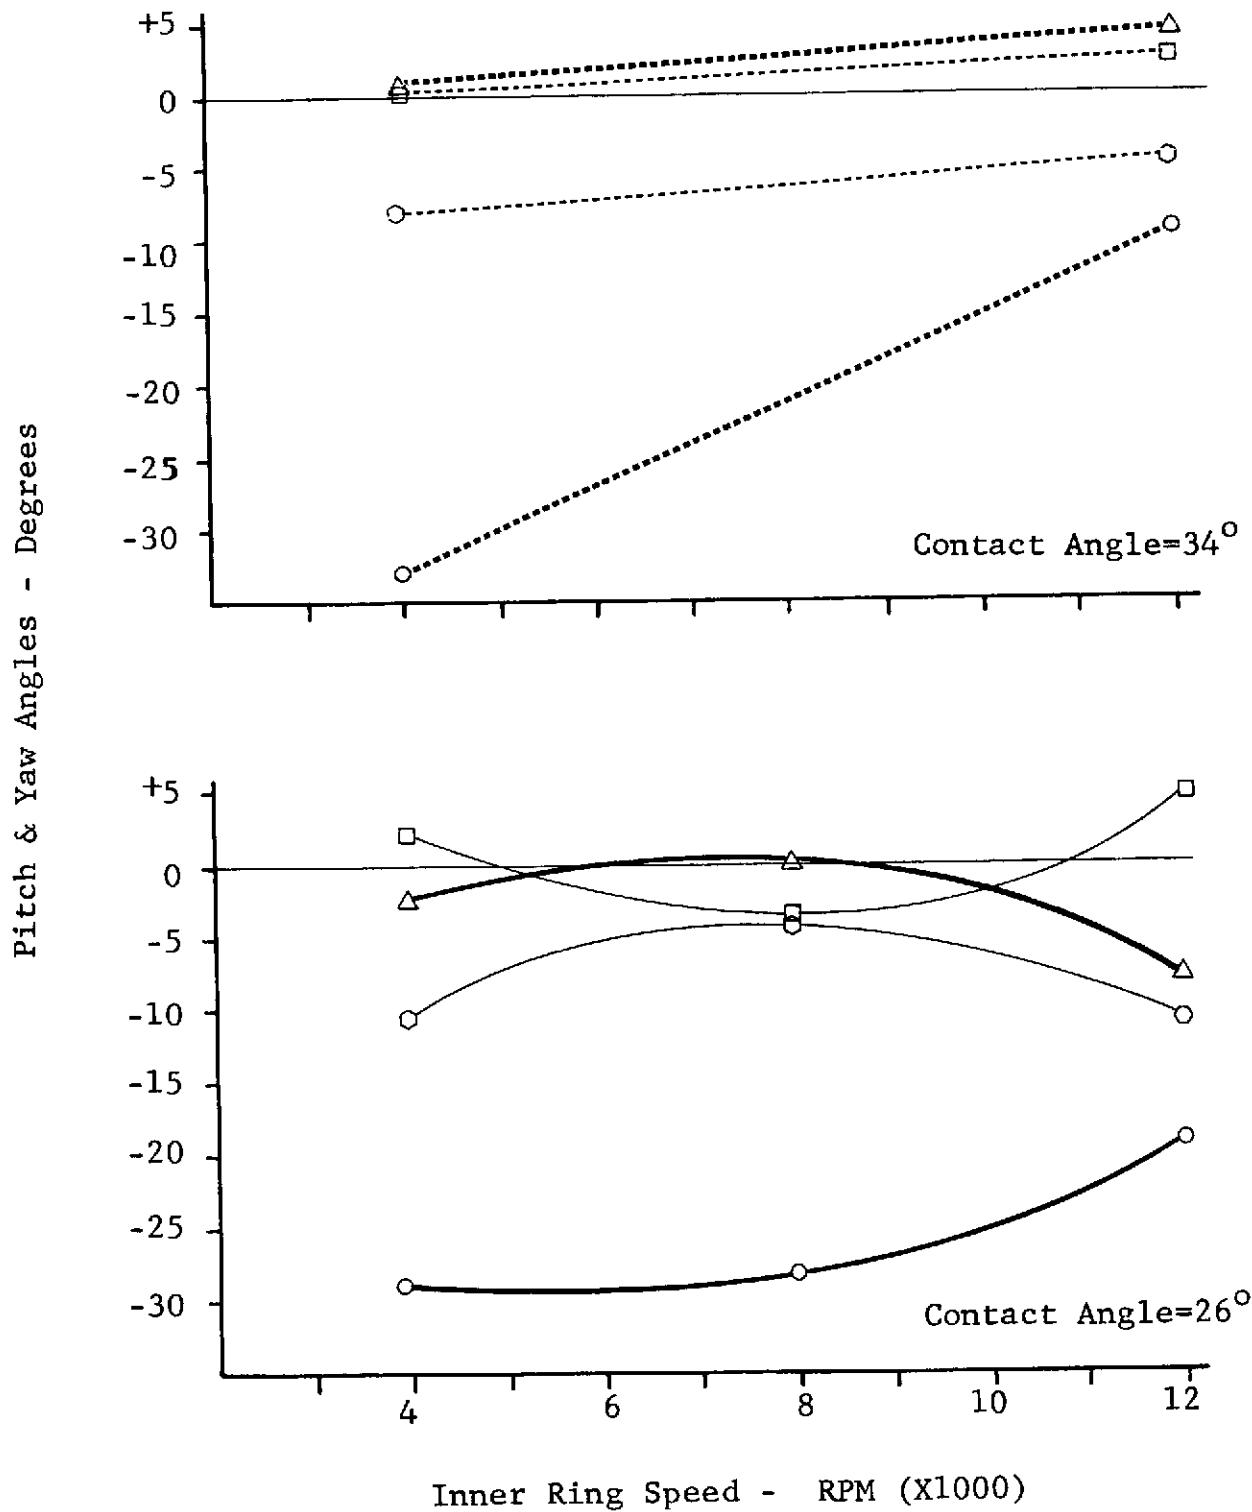


Figure -24-




P-1246

CR-134528

A P P E N D I X 1

Ball Motion Printout for Tests

IA-1 through IA-6



INDUSTRIAL TECTONICS, INC., RESEARCH AND DEVELOPMENT DIVISION

ITI BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. 1-A-1

11-30-72

APP. - I -

	SHAFT RPM	BALL DIA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH				
FRAME NO.	D.R. POSITION (DEG)	I.P. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION X Y Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED PERCE (RPM)	BALL SPEED PERCENT (RPM)	BALL ERROR
	4000.	0.750	3	5.6350	2.8175	12.750	34.276				
1	309.200	63.600	0.0	29.2 44.3	2.981 0.795	-0.434 -0.148					
						-0.0764 0.9948-0.0672	-3.863	-4.392	32.330	1795.	1.34 16579. -11.73
2	312.700	59.300	0.0	43.3 43.5	-3.429 -3.423	-0.473 0.181					
						-0.0764 0.9948-0.0672	-3.863	-4.392	32.330	1737.	-1.93 17016. -9.40
3	316.000	55.000	0.0	21.3 44.1	3.476 -1.636	-0.227 -0.250					
						-0.2359 0.9602 0.1496	8.853	-13.801	54.532	1744.	-1.51 27965. 48.90
4	319.400	50.600	0.0	44.3 40.3	-0.210 -3.291	0.351 -0.660					
						-0.1453 0.9824-0.1174	-6.813	-8.414	71.417	1766.	-0.27 37100. 97.54
5	322.800	46.300	0.0	44.3 29.1	-0.672 -3.665	-0.896 -0.690					
						-0.5876 0.6753-0.4456	-33.420	-41.028	26.881	1795.	1.34 13785. -26.60
6	326.300	42.000	0.0	42.2 31.2	3.514 0.474	0.692 0.937					
						0.0306 0.9937-0.1076	-6.179	1.766	32.818	1737.	-1.93 17273. -8.03
7	329.600	37.700	0.0	43.1 44.2	3.575 0.070	-0.860 -1.369					
						0.9266 0.3677-0.0787	-12.078	68.353	7.174	1790.	1.04 3776. -79.90
8	333.000	33.500	0.0	43.5 44.3	3.417 -0.378	-0.902 -1.036					
						0.1221 0.9770-0.1749	-10.149	7.125	34.086	1795.	1.34 17480. -6.93
9	336.500	29.200	0.0	43.6 40.5	3.684 2.590	-0.515 -0.609					
						-0.0522 0.9711-0.2329	-13.485	-3.074	28.242	1795.	1.34 14483. -22.89

PRECEDING PAGE BLANK NOT FILMED

FRAME NO.	O.P. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	NO. NC.	MEASURED COORDINATES TANG RAD		X	Y	Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	SPIN AXIS ROTATION (RPM)	BALL SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED PERCENT (RPM)	BALL ERROR
					X	Y										
10	240.000	24.900	0.0	40.1 44.3	3.944 1.565	-0.812 0.240				-0.1406 0.0898-0.0224	-1.294	-8.087	61.896	1758.	-0.72	2933.-84.38
11	17.100	337.600	0.0	43.1 44.2	3.453 0.783	0.277 -1.123				-0.1457 0.9548-0.2590	-15.177	-8.614	49.092	1737.	-1.43	25838. 37.57
12	20.400	333.300	0.0	37.1 31.2	-3.990 -1.360	-0.208 0.470				-0.7421 0.2121 0.6359	71.555	-74.050	10.447	1766.	-0.27	5427.-71.11
13	23.800	329.000	0.0	30.4 42.1	3.245 1.492	-0.360 0.565				0.0069 0.9904-0.1377	-7.916	0.397	29.096	1766.	-1.27	15114.-19.53
14	27.200	324.700	0.0	42.2 44.3	-3.547 0.608	-0.475 1.110				0.1700 0.9754-0.1404	-8.191	9.888	26.232	1766.	-1.27	13627.-27.45
15	30.600	320.400	0.0	42.4 29.1	-3.693 2.757	-0.551 0.340				-0.2302 0.9009-0.3679	-22.211	-14.332	17.813	1795.	1.34	9135.-51.36
16	24.100	316.100	0.0	42.3 43.3	-2.210 -3.307	-1.300 0.387				-0.1299 0.9745-0.1827	-10.621	-7.590	35.033	1737.	-1.93	18438. -1.83
17	17.400	311.800	0.0	43.5 44.2	-3.360 -1.511	-0.695 0.114				0.1547 0.9640-0.2161	-12.635	9.115	24.590	1766.	-0.27	12774.-31.98
18	40.800	307.500	0.0	44.2 29.3	-0.858 -0.120	-0.291 1.520				-0.0239 0.9917-0.1262	-7.252	-1.372	29.811	1766.	-0.27	15486.-17.55
19	24.200	303.200	0.0	30.3 40.2	-3.557 -3.610	0.401 -0.394				-0.0238 0.9917-0.1262	-7.252	-1.372	29.811	1766.	-0.27	15486.-17.55
20	47.600	298.900	0.0	42.2 31.2	3.652 0.880	-0.378 0.685				0.1089 0.9932-0.1465	-8.474	6.319	32.183	1766.	-0.27	16718.-10.99
21	51.000	294.600	0.0	42.4 31.2	3.800 0.260	-0.277 0.940				-0.0621 0.6828 0.7274	46.809	-5.697	11.331	1813.	2.39	6044.-67.82
22	54.400	290.500	0.0	31.2 44.3	-0.456 -0.546	0.880 -0.927				-0.1064 0.9422-0.3178	-18.642	-6.443	53.990	1744.	-1.55	27687. 47.41
23	57.800	286.100	0.0	44.3 43.5	-0.275 3.503	-1.187 -0.208				0.1081 0.9790-0.1729	-10.018	6.300	32.628	1766.	-0.27	16950. -9.75
24	61.200	281.800	0.0	43.6 42.1	3.690 -0.553	0.208 1.338				-0.0532 0.9789-0.1975	-11.405	-3.113	26.257	1766.	-0.27	13641.-27.37
25	64.600	277.500	0.0	44.3 40.2	1.442 3.704	0.465 -0.460				0.0890 0.9918-0.0914	-5.267	5.128	30.922	1766.	-0.27	16063.-14.47
26	68.000	273.200	0.0	44.2 42.3	0.812 -1.477	0.112 1.245				0.0099 0.9741-0.2260	-13.060	0.522	27.838	1766.	-0.27	14461.-23.00
27	71.400	268.900	0.0	29.1 44.1	2.875 0.844	-0.025 -0.470				0.0217 0.9751-0.2209	-12.766	1.277	30.889	1789.	-0.27	16046.-14.56
28	74.800	264.600	0.0	29.2 19.5	3.001 3.821	-0.237 0.005				0.0217 0.9751-0.2209	-12.766	1.277	30.889	1789.	1.04	16258.-13.44
29	78.200	260.400	0.0	43.5 29.3	-3.395 1.117	-0.158 1.228				0.0546 0.9883-0.1426	-8.210	3.161	28.128	1766.	-0.27	14612.-22.20

FRAME NO.	O.R. (DEG)	I.R. (DEG)	BALL TO POINT SEP POS (IN.)	BALL TO POINT NO.	MEASURED COORDINATES		SPIN AXIS X	SPIN AXIS Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (PPM)	SEPARATOR PERCENT	BALL SPEED (RPM)	BALL PERCENT ERROR
					TANG	RAD										
30	81.600	256.100	0.0	43.6 21.4	-3.628 4.050	-0.492 -0.455	0.5204	0.8526-0.0470	-3.153	31.396	22.297	1766.	-0.27	11583.	-38.33	
31	85.000	251.800	0.0	30.4 29.3	-3.050 -0.850	0.358 1.320	0.0035	0.9858-0.1682	-9.682	0.202	29.872	1795.	1.34	15319.	-18.44	
32	88.500	247.500	0.0	30.3 31.2	-3.609 1.061	-0.936 0.534	0.0910	0.9760-0.1976	-11.447	5.328	27.706	1789.	1.04	14582.	-22.36	
33	91.900	243.300	0.0	29.1 44.1	-2.783 -0.705	-0.523 -0.455	-0.0800	0.9878-0.1336	-7.702	-4.629	32.344	1766.	-0.27	16802.	-10.54	
34	95.300	239.000	0.0	43.1 19.5	3.682 -3.747	-0.592 -0.259	-0.9594	0.1576-0.2338	-56.017	-80.672	25.159	1737.	-1.93	13242.	-29.50	
35	98.600	234.700	0.0	43.5 42.1	3.475 0.657	-0.747 1.324	0.0444	0.7125-0.7003	-44.505	3.567	151.780	1818.	2.66	78847.	319.81	
36	102.100	230.500	0.0	43.6 40.5	-3.701 2.660	-0.367 -0.533	0.0018	0.9762-0.2170	-12.531	0.104	148.754	1766.	-0.27	77274.	311.44	
37	105.500	226.200	0.0	40.2 31.2	3.627 -1.363	-1.020 -0.780	0.0849	0.9879-0.1295	-7.468	4.910	29.058	1784.	1.04	15294.	-18.57	
38	108.900	222.000	0.0	44.3 30.4	1.034 3.160	0.903 0.268	0.0239	0.9883-0.1508	-8.678	1.386	29.584	1764.	-0.27	15368.	-18.17	
39	112.300	217.700	0.0	44.3 29.1	0.221 2.876	1.209 -0.507	0.0727	0.9720-0.2236	-12.953	4.275	33.777	1764.	-0.27	17547.	-6.58	
40	115.700	213.400	0.0	29.2 43.1	2.955 -3.536	-0.741 0.369	0.9793	0.2018 0.0175	4.962	78.354	25.217	1766.	-0.27	13100.	-30.25	
41	119.100	209.100	0.0	44.3 43.3	-1.279 -3.412	0.553 -0.242	0.0769	0.9783-0.1922	-11.115	4.496	27.290	1752.	-1.10	14269.	-24.03	
42	122.450	204.800	0.0	21.3 44.3	3.462 -1.612	-0.598 -0.221	0.9846	0.1595 0.0711	24.027	80.796	10.234	1775.	0.21	5422.	-71.13	
43	125.800	200.600	0.0	31.2 44.2	1.440 -1.019	-0.395 -0.446	0.6784	0.7205 0.1437	11.276	43.274	6.728	1819.	2.14	3429.	-81.75	
44	129.350	196.300	0.0	32.2 30.3	3.529 -3.675	0.095 -0.352	-0.3107	0.8964-0.3160	-19.417	-19.118	24.062	1717.	-1.93	12664.	-32.57	
45	132.650	192.000	0.0	42.2 31.1	3.571 -0.165	0.211 1.815	-0.0207	0.9824-0.1856	-10.700	-1.209	28.956	1763.	-0.45	15240.	-18.86	
46	136.000	187.750	0.0	42.4 31.2	3.711 -0.045	0.356 0.879	0.0178	0.9932-0.1153	-6.619	1.024	29.799	1778.	0.38	15581.	-17.04	
47	139.400	183.500	0.0	43.3 31.2	3.464 -0.671	-0.787 0.670	0.1724	0.9679-0.1826	-10.686	10.101	35.257	1785.	1.04	18556.	-1.20	
48	142.800	179.300	0.0	43.5 21.3	3.404 -3.341	0.267 0.181	-0.0268	0.9680-0.2495	-14.453	-1.586	28.961	1744.	-1.55	14852.	-20.92	
49	146.200	174.900	0.0	40.3 44.3	3.390 1.692	-0.654 -0.155	0.0825	0.9724-0.2182	-12.647	4.847	32.012	1761.	-0.62	17073.	-9.10	

Frame No.	O.R. Position (deg)	I.R. Position (deg)	Ball To Sep Pos (in.)	Point No.	Measured Coordinates		Spin Axis X	Spin Axis Y	Spin Axis Z	Spin Axis Pitch (deg)	Spin Axis Yaw (deg)	Ball Rotation (deg)	Separator Speed (rpm)	Separator Percent Error	Ball Speed (rpm)	Ball Percent Error
					Tang	Rad										
50	149.500	170.700	0.0	30.3	3.705 40.2	-0.672 3.664 0.109	0.0825	0.9724-0.2182	-12.647	4.847	32.012	1753.	-0.74	16312.	-13.15	
51	152.950	166.300	0.0	44.2	0.756 42.2	0.158 -3.525 -0.634	0.4511	0.7996-0.3964	-26.370	29.432	158.549	1328.	3.20	84000.	347.24	
52	156.400	162.200	0.0	19.4	3.968 0.0	-0.533 0.0	0.2854	0.9505-0.1230	-7.371	16.711	37.689	1740.	-1.74	19579.	4.24	
53	159.750	157.950	0.0	19.5	3.742 43.3	0.538 -3.289 0.262	-0.0777	0.9739-0.2132	-12.349	-4.559	27.380	1804.	1.86	14316.	-23.77	
54	163.200	153.650	0.0	43.5	-3.343 21.1	-0.803 3.908 -0.255	0.9582	0.1290 0.2553	63.201	82.335	25.586	1716.	-0.27	13291.	-29.23	
55	166.600	149.350	0.0	21.4	4.068 40.3	0.084 -3.212 0.136	-0.1654	0.9608-0.2224	-13.035	-9.766	26.381	1740.	-1.74	13705.	-27.03	
56	169.950	145.000	0.0	32.2	3.648 31.2	-0.604 1.409 0.0	0.1997	0.9676-0.1545	-9.072	11.659	36.828	1813.	2.39	19641.	4.58	
57	173.350	140.900	0.0	42.2	3.707 31.2	-0.462 0.993 0.571	0.1415	0.9713-0.1912	-11.137	8.289	32.135	.755.	-0.92	16586.	-11.69	
58	176.750	126.550	0.0	42.4	3.850 31.1	-0.385 1.616 -0.789	-0.0732	0.9896-0.1234	-7.109	-4.231	29.773	1816.	2.53	15670.	-16.57	
59	180.200	132.400	0.0	43.1	3.763 33.2	-0.192 0.736 -0.378	0.0297	0.9775-0.2089	-12.062	1.480	26.657	1752.	-1.10	13938.	-25.79	
60	183.550	128.100	0.0	43.5	3.616 31.2	-0.342 0.251 -0.910	0.1545	0.9698-0.1889	-11.022	9.052	33.446	1775.	0.21	17720.	-5.65	
61	184.500	123.900	0.0	40.5	2.802 44.2	-0.237 1.132 -0.884	0.0503	0.9792-0.1965	-11.344	2.940	28.671	1778.	0.38	14992.	-20.18	
62	180.200	119.650	0.0	40.4	2.679 42.1	0.090 -1.156 0.724	0.0102	0.9746-0.2230	-12.936	0.605	28.224	1769.	-0.10	14474.	-22.94	
63	193.750	115.300	0.0	30.4	2.184 44.1	0.631 0.871 -0.968	0.0030	0.9789-0.2043	-11.737	0.173	27.502	1813.	2.39	14668.	-21.90	
64	197.150	111.200	0.0	29.1	3.054 44.3	-0.213 0.223 1.104	0.0769	0.9798-0.1845	-10.665	4.485	35.188	1752.	-1.10	18399.	-2.04	
65	200.500	106.200	0.0	23.2	3.222 44.2	-0.213 0.222 0.434	0.1046	0.9914-0.0790	-4.557	6.025	29.772	1748.	-1.28	15773.	-16.02	
66	203.800	102.650	0.0	42.3	-3.123 44.3	-0.817 -1.068 0.302	0.1640	0.9766-0.1393	-8.116	9.534	27.715	1778.	0.38	14491.	-22.84	
67	207.200	98.400	0.0	42.6	-3.385 44.2	-0.493 -1.282 -0.510	0.1923	0.9738-0.1363	-7.967	10.604	27.449	1816.	2.53	14447.	-23.08	
68	210.650	94.250	0.0	40.1	-3.693 29.3	-0.111 1.264 -0.361	-0.3405	0.9352 0.0963	5.981	-20.013	81.764	1748.	-1.28	43319.	130.64	
69	213.950	90.000	0.0	32.2	-3.715 20.3	0.509 -0.811	0.0426	0.9584-0.2221	-16.403	2.548	121.722	1795.	1.34	62421.	232.35	

FRAME NO.	O.P. (DEG)	I.R. (DEG)	BALL TO POINT (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (RPM)	SEPARATOR SPEED PERCENT	BALL SPEED PERCENT
					X	Y	Z					
70	217.450	85.700	0.0	29.1 -2.500 -0.453 29.3 -1.517 -0.213	0.0426	0.9584-0.2821	-16.403	2.548	121.722	1775.	0.21	64489.243.36
71	220.800	81.500	0.0	19.5 -3.475 -0.110 44.1 -0.205 -0.750	0.0714	0.9738-0.2153	-12.495	4.192	29.829	1766.	-0.27	15495.-17.50
72	224.200	77.200	0.0	43.3 3.754 -0.165 44.1 0.0 -0.997	0.4950	0.8354-0.2597	-17.205	30.138	148.979	1804.	1.86	77898.314.75
73	227.650	73.000	0.0	40.5 3.010 -0.514 44.1 3.516 -1.099	0.7234	0.6344 0.2725	23.249	48.752	111.875	1740.	-1.74	58117.209.44
74	231.000	68.650	0.0	40.3 3.616 0.0 94.2 1.368 -0.302	0.8462	0.4998 0.1847	20.291	59.431	162.376	1801.	1.71	86027.358.04
75	234.400	64.500	0.0	30.4 3.431 0.296 44.2 1.212 0.167	0.1272	0.9864-0.1041	-6.025	7.350	32.383	1795.	1.34	16607.-11.58
76	237.800	60.200	0.0	29.1 3.088 -0.441 44.1 1.061 -0.402	0.0331	0.9813-0.1871	-10.788	1.929	30.173	1752.	-1.10	15777.-16.00
77	241.250	55.900	0.0	22.2 3.123 -0.656 44.1 0.998 0.0	0.2413	0.9654-0.0989	-5.850	14.032	40.123	1714.	-3.21	21836. 16.26
78	244.400	51.700	0.0	20.3 4.068 -0.570 44.2 -0.183 0.624	-0.0026	0.9947-0.1025	-5.886	-0.151	27.989	1806.	2.00	14446.-23.09
79	247.900	47.450	0.0	21.3 3.581 -0.589 31.1 2.566 0.0	0.0712	0.9866-0.1467	-8.456	4.127	30.395	1813.	2.39	16211.-13.69
80	251.300	43.350	0.0	40.3 -3.200 -0.084 32.1 4.164 0.161	-0.1375	0.9629-0.2323	-13.564	-8.124	27.131	1755.	-0.92	14003.-25.44
81	254.700	39.000	0.0	32.2 3.621 0.189 44.1 -0.461 0.333	0.0541	0.9918-0.1161	-6.677	3.124	31.403	1789.	1.04	16528.-12.00
82	258.100	34.800	0.0	42.2 3.650 0.314 44.2 -0.517 -0.986	0.0165	0.9965-0.0925	-4.734	0.948	27.198	1752.	-1.10	14221.-24.28
83	261.450	30.500	0.0	19.4 -3.969 -0.090 44.1 -0.710 -0.434	-0.0066	0.9839-0.1787	-10.295	-0.383	29.964	1760.	-0.62	15981.-14.91
84	264.750	26.300	0.0	43.3 3.418 -0.707 44.1 -0.577 -0.790	0.0926	0.9946-0.0477	-2.745	5.318	26.255	1816.	2.52	13818.-26.43
85	268.200	22.150	0.0	43.6 3.584 -1.402 44.2 0.729 -0.837	0.0363	0.9704-0.2388	-13.826	2.142	36.819	1766.	-0.27	19127. 1.84
86	271.600	17.850	0.0	40.3 3.282 -0.554 44.2 0.875 -0.512	-0.0407	0.9905-0.1315	-7.565	-2.353	27.505	1775.	0.21	14572.-22.41
87	274.950	13.650	0.0	30.3 3.670 -0.663 44.1 0.453 -0.969	-0.0418	0.9926-0.1137	-6.532	-2.414	25.473	1752.	-1.10	13320.-29.08
88	278.300	9.350	0.0	44.1 0.689 -0.702 44.2 0.641 0.274	0.0112	0.9739-0.2267	-13.102	0.656	26.210	1766.	-0.27	13615.-27.51
89	281.700	5.050	0.0	29.1 2.759 0.359 44.2 0.248 0.531	0.0653	0.9883-0.1378	-7.637	3.780	34.544	772.	0.04	18574. -1.11

FRAME NO.	D.R. (DEG)	I.R. (DEG)	BALL POSITION SEP POS (IN.)	BALL TO POINT NO. (IN.)	MEASURED COORDINATES		SPIN AXIS X Y Z	DIRECTION PITCH (DEG)	SPIN AXIS YAW (DEG)	SPIN AXIS ROTATI # (DEG)	BALL SPEED (RPM)	SEPARATOR SPEED PERCENT (RPM)	BALL SPEED PERCENT (RPM)		
					TANG	RAD									
90	285.000	0.900	0.0	29.2 44.1	2.955 0.681	0.213 0.078	0.1323 -0.0785	0.9869-0.0916 0.8772-0.4737	-5.302 -28.370	7.671 -5.121	33.853 22.077	1737. 1842.	-1.94 4.01	17818. 11620.	-5.13 -38.13
91	288.300	366.600	0.0	29.3 44.3	0.851 -1.497	1.405 0.185	-0.0448 -0.0448	0.9797-0.1954 0.9817-0.1864	-11.282 -10.753	2.616 2.326	31.300 29.228	1781. 1787.	0.54 0.88	16155. 15588.	-13.98 -17.00
92	291.400	352.500	0.0	21.3 44.1	3.429 -0.864	0.514 -0.278	-0.0696 -0.0399	0.8991-0.4062 0.9817-0.1864	-24.311 -10.753	6.970 2.326	33.156 29.228	1784. 1722.	0.72 -2.78	17922. 15485.	-4.58 -17.55
93	295.150	348.100	0.0	32.2 31.1	3.630 1.478	-0.510 1.245	-0.0399 -0.0399	0.9618-0.2473 0.9817-0.1864	-14.418 -10.753	2.326 2.326	25.035 29.228	1729. 1813.	-2.37 2.38	12921. 15588.	-31.20 -17.00
94	298.450	344.000	0.0	42.2 31.2	3.655 0.904	-0.406 0.275	-0.0696 -0.0399	0.9034-0.0915 0.9817-0.1864	-5.262 -10.753	28.902 2.326	1766. 29.228	1766. 1787.	-0.27 0.88	15014. 15588.	-20.06 -17.00
95	301.850	339.700	0.0	31.2 44.1	0.266 -0.755	1.084 -0.409	-0.0448 -0.0399	0.9797-0.1954 0.9817-0.1864	-11.282 -10.753	2.616 2.326	31.300 29.228	1781. 1722.	0.54 -2.78	16155. 15485.	-13.98 -17.55
96	305.300	335.400	0.0	43.1 44.2	3.604 0.197	-0.160 -1.319	-0.0399 -0.0399	0.9797-0.1954 0.9817-0.1864	-11.282 -10.753	2.326 2.326	29.228 29.228	1787. 1813.	0.88 2.38	15588. 15588.	-17.00 -17.00
97	308.650	331.250	0.0	43.5 43.3	3.454 3.375	-0.250 0.414	-0.0399 -0.0399	0.9817-0.1864 0.9817-0.1864	-10.753 -10.753	2.326 2.326	29.228 29.228	1787. 1722.	0.88 -2.78	15588. 15485.	-17.00 -17.55
98	311.900	326.950	0.0	44.2 44.3	0.877 1.635	-0.812 -0.356	-0.0399 -0.0399	0.9817-0.1864 0.9817-0.1864	-10.753 -10.753	2.326 2.326	29.228 29.228	1722. 1813.	2.38	15588.	-17.00
99	315.300	322.850	0.0	40.3 40.2	3.252 3.688	0.426 -0.571	-0.0399 -0.0399	0.9817-0.1864 0.9817-0.1864	-10.753 -10.753	2.326 2.326	29.228 29.228	1813. 1813.	2.38	15588.	-17.00
SEPARATOR		AVG. SPEED (RPM)	Avg. ABS(SPEED ERROR) (PERCENT)	AVERAGE YAW (DEG.)		AVERAGE PITCH (DEG.)		MEAN BALL POSITION (DEG.)							
SEPARATOR	1771.06	1.1407		4.325		-7.754		0.0							
BALL	18781.57	46.4449													

ITI BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. I-A-2 (10/26/72)

APP. - 1-

	SHAFT RPM	BALL DIA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD.	FILM MAGNIFICATION	OBJECT LENGTH				
4000 +2000		0.750	2	5.6350	2.8175	12.750	34.276				
FRAME NO.	O.R. (DEG)	I.R. (DEG)	BALL TC POINT POSITION SEP POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION X Y Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR (RPM)	BALL SPEED PERCENT (RPM)	BALL ERROR
1	89.000	77.100	0.0	3.2 -1.476 0.438 2.3 0.892 -0.997					(3x)	(3x)	
2	92.600	72.300	0.0	43.2 3.815 0.165 5.3 -3.480 -1.103	0.1363 0.8041-0.5787	-35.744	9.622	27.062	5143.	-2.81	38660.-19.67
3	96.300	67.700	0.0	3.5 -3.006 -0.763 30.3 0.384 0.418	-0.2564 0.7960-0.5482	-34.556	-17.855	26.111	5349.	1.09	37751.-21.56
4	100.100	63.000	0.0	36.5 -2.978 0.027 12.1 3.817 -1.179	0.1732 0.7738-0.6093	-38.215	12.616	27.190	5365.	1.38	38386.-20.24
5	103.800	58.300	0.0	6.1 1.000 -0.883 11.1 3.700 -0.613	-0.2028 0.8366-0.5089	-31.309	-13.623	36.217	5286.	-0.11	51738. 7.51
6	107.500	53.500	0.0	43.3 -3.600 -0.192 6.3 -0.627 0.835	-0.3108 0.8481-0.4291	-26.838	-20.125	51.108	5224.	-1.29	72153. 49.92
7	111.100	48.800	0.0	43.2 -4.040 0.725 6.5 0.689 -0.817	-0.7247 0.6092-0.3221	-27.867	-49.947	21.904	5205.	-1.64	31669.-34.20
8	114.200	44.800	0.0	4.5 2.690 -0.290 5.1 3.854 -0.495	-0.0061 0.9089-0.4169	-24.641	-0.387	51.980	5239.	-0.99	87854. 82.55
9	118.500	39.500	0.0	12.2 -3.375 -0.643 5.3 2.915 0.400	-0.8748 0.4844-0.0066	-0.784	-61.025	19.298	5375.	1.57	24123.-49.88
					-0.2278 0.7180-0.6578	-42.494	-17.602	24.348	5365.	1.38	34373.-28.58

NOTE: FOR ACTUAL SPEED VALUES IN THIS RUN I-A-2 DIVIDE PRINTED FIGURES OF
SEPARATOR- AND BALL SPEEDS BY 3. OTHER VALUES ARE CORRECT.

TA

FRAME NO.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP. POS. (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS (DEG)	BALL (DEG)	SEPARATOR ROTATION (RPM)	BALL SPEED PERCENT	BALL SPEED PERCENT	
					X	Y	Z						
10	122.300	34.800	0.0	11.3 -4.096 3.5 2.895	-0.147 -0.389								
11	125.900	30.100	0.0	10.5 -3.821 4.3 -0.624	-0.425 -0.467	-0.0334 0.8552-0.5173	-31.168	-2.234	31.520	5205.	-1.64	45571.	-5.31
12	129.700	25.400	0.0	9.1 -3.445 4.4 -1.564	0.233 -0.075	0.0532 0.8679-0.4938	-29.638	3.507	30.747	5365.	1.38	43407.	-9.81
13	133.300	20.800	0.0	5.1 -3.774 3.1 -1.599	-0.219 -0.204	0.0996 0.8702-0.4825	-29.008	6.526	29.507	5268.	-0.44	43182.	-10.27
14	137.100	16.000	0.0	41.2 -3.518 2.3 -0.152	-0.528 -0.648	0.0772 0.8382-0.5399	-32.790	5.264	31.136	5302.	0.20	43446.	-9.72
15	140.700	11.200	0.0	30.1 -0.815 2.3 -0.780	-0.210 -0.871	0.0014 0.9190-0.3942	-23.215	0.088	36.322	5143.	-2.81	51888.	7.82
16	144.500	366.700	0.0	36.5 -3.281 1.2 -0.450	-0.655 -0.216	0.0014 0.9190-0.3942	-23.215	0.088	36.322	5494.	3.82	52513.	9.12
17	148.200	361.900	0.0	26.6 -3.953 1.1 -0.675	0.161 0.340	0.0576 0.8755-0.4798	-28.723	3.762	30.266	5223.	-1.29	42728.	-11.22
18	151.800	357.300	0.0	43.3 -3.813 6.1 -0.096	-1.005 -0.462	0.0499 0.8662-0.4972	-29.857	3.299	30.448	5268.	-0.44	44558.	-7.41
19	155.400	352.700	0.0	41.2 -3.534 6.3 -0.447	-0.626 -0.675	0.0545 0.8761-0.4791	-28.673	3.561	30.618	5429.	2.59	43741.	-9.11
20	159.300	348.100	0.0	5.1 3.576 4.2 0.924	0.363 -0.020	0.0764 0.8465-0.5268	-31.896	5.159	30.228	5349.	1.09	43703.	-9.19
21	163.400	343.300	0.0	4.4 1.486 3.2 2.578	0.095 -0.330	0.0115 0.9107-0.4128	-24.383	0.725	33.329	5224.	-1.29	47052.	-2.23
22	166.700	338.700	0.0	4.1 -0.412 3.1 1.352	-0.745 0.090	-0.0139 0.8663-0.4994	-29.961	-0.919	29.700	5349.	1.09	42941.	-10.77
23	170.300	334.000	0.0	10.4 -3.480 2.4 -0.955	0.298 0.520	0.0478 0.7655-0.6417	-39.973	3.574	27.922	5205.	-1.64	40370.	-16.12
24	174.100	329.300	0.0	3.2 -1.472 7.3 1.324	0.656 0.712	-0.4581 0.7985-0.3906	-26.065	-29.846	40.095	5365.	1.38	56604.	17.62
25	177.800	324.600	0.0	30.2 1.202 43.2 3.907	0.962 0.162	-0.0125 0.8637-0.5038	-30.252	-0.827	29.917	5286.	-0.11	42739.	-11.19
26	181.400	319.800	0.0	30.3 0.484 41.2 3.232	0.598 0.298	-0.0207 0.8931-0.4495	-26.716	-1.326	29.677	5143.	-2.81	42396.	-11.91
27	185.200	315.100	0.0	12.2 3.479 1.3 0.596	-0.812 1.207	-0.1731 0.8085 0.5625	34.926	-12.082	8.506	5365.	1.38	12008.	-75.05
28	189.900	310.400	0.0	1.3 -0.967 24.2 1.124	1.049 0.812	0.0040 0.9623-0.2721	-15.789	0.240	74.453	5266.	-0.11	106362.	121.01
29	192.600	305.600	0.0	43.5 -3.199 6.3 0.688	-0.286 -0.687	0.0343 0.8792-0.4752	-28.391	2.237	31.641	5223.	-1.29	44669.	-7.18

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP. POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	
					X	Y	Z				
30	196.200	301.000	0.0	41.2 -3.191 -0.363 6.6 0.771 0.910	0.0641	0.8863-0.4586	-27.357	4.138	30.934	5365.	1.38 43671. -9.26
31	200.000	296.300	0.0	24.1 -3.943 -0.055 4.5 2.743 -0.254	-0.1908	0.6671-0.7201	-47.187	-15.961	15.898	5268.	-0.44 23266.-51.66
32	203.600	291.700	0.0	12.4 -3.838 0.556 4.2 0.436 0.250	-0.2242	0.8724-0.4342	-26.461	-14.412	81.527	5268.	-0.44 119306.147.90
33	207.200	287.100	0.0	10.2 -3.611 -0.128 4.2 -0.663 0.150	-0.3213	0.9213-0.2190	-13.372	-19.224	23.353	5429.	2.59 33361.-30.68
34	211.000	282.500	0.0	10.3 -3.776 -0.120 4.2 -1.566 -0.424	-0.3182	0.9094-0.2676	-16.358	-19.286	27.061	5223.	-1.29 38203.-20.62
35	214.700	277.700	0.0	10.4 -3.767 -0.475 2.4 0.417 -0.765	0.1005	0.8819-0.4607	-27.582	6.495	28.608	5286.	-0.11 40869.-15.08
36	218.400	273.000	0.0	43.5 3.258 -0.300 5.1 -3.732 0.095	0.0048	0.8822-0.4708	-28.086	0.314	32.086	5481.	3.58 47534. -1.23
37	222.100	268.600	0.0	41.2 3.571 -0.663 3.2 -2.700 -0.885	-0.0702	0.8527-0.5177	-31.266	-4.705	28.817	5143.	-2.81 41166.-14.46
38	225.700	263.800	0.0	24.1 3.763 0.420 1.1 1.738 -0.195	-0.0192	0.8797-0.4751	-28.374	-1.251	22.357	5365.	1.38 31563.-34.42
39	229.500	259.100	0.0	12.1 3.764 -0.424 1.3 -0.072 1.209	-0.0151	0.8954-0.4450	-26.426	-0.965	39.107	5349.	1.09 56542. 17.49
40	233.200	254.500	0.0	1.1 -0.508 0.460 11.1 3.523 0.091	-0.1591	0.9274-0.3385	-20.051	-9.735	39.232	5349.	1.09 56721. 17.86
41	236.900	249.900	0.0	43.3 -3.765 -0.660 10.3 3.575 0.296	-0.7721	0.3383-0.5380	-57.841	-66.342	30.795	5082.	-3.96 43476. -9.66
42	240.600	245.000	0.0	24.1 -3.471 -0.318 6.4 -0.485 0.937	0.3182	0.1215-0.9402	-82.639	69.109	18.771	5349.	1.09 27138.-43.61
43	244.200	240.400	0.0	5.3 3.451 -0.598 4.2 1.114 -0.065	-0.8749	0.4404 0.2016	24.596	-63.281	16.120	5224.	-1.29 22750.-52.71
44	247.900	235.600	0.0	12.2 -3.454 -1.066 3.2 2.504 -0.663	-0.8726	0.0162-0.4881	-88.101	-88.937	17.985	5349.	1.09 26002.-45.97
45	251.600	231.000	0.0	11.1 -3.721 -0.927 4.1 -0.295 -0.723	0.0637	0.8635-0.5004	-30.093	4.219	31.288	5286.	-0.11 44697. -7.13
46	255.300	226.300	0.0	10.1 -2.838 0.126 4.4 -0.757 0.395	0.0335	0.8522-0.5222	-31.501	2.249	31.077	5428.	2.58 44397. -7.75
47	259.100	221.700	0.0	3.2 -1.210 0.750 36.6 3.994 0.116	0.0447	0.8902-0.4535	-26.996	2.874	30.196	5205.	-1.64 43656. -9.29
48	262.700	217.000	0.0	5.1 -3.900 -0.727 43.5 2.940 0.221	-0.1297	0.8187-0.5594	-34.342	-9.000	27.139	5286.	-0.11 38770.-19.44
49	266.400	212.300	0.0	41.2 3.393 -0.045 1.2 1.102 -0.492	0.0730	0.3397-0.9377	-70.086	12.129	31.187	5205.	-1.64 45089. -4.31

FRAME NO.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP. POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG) (RPM)	SEPARATOR SPEED PERCENT ERROR	BALL SPEED PERCENT ERROR
					X	Y	Z			
50	270.000	207.600	0.0	7.1 -3.830 -0.937 30.3 -0.636 0.470	-0.3407	0.9263	0.1609	9.852 -20.193	37.652 5428.	2.58 53789. 11.77
51	273.800	203.000	0.0	36.5 -3.401 -1.051 1.3 -0.723 1.037	0.0249	0.8836-0.4675	-27.882	1.615	30.643 5350.	1.09 44302. -7.95
52	277.500	198.400	0.0	36.6 -4.096 -0.310 1.1 -1.034 0.231	0.1045	0.8730-0.4763	-28.617	6.824	29.759 5143.	-2.82 42514.-11.66
53	281.100	193.600	0.0	43.2 -3.942 -0.107 6.6 1.027 0.686	-0.0661	0.8780-0.4741	-28.368	-4.303	34.791 5429.	2.59 49702. 3.27
54	284.900	189.000	0.0	24.1 -3.826 0.316 41.2 -3.608 -1.056	0.2128	0.8396-0.4997	-30.761	14.225	27.825 5349.	1.09 40229.-16.41
55	288.600	184.400	0.0	12.4 -3.787 -0.275 4.1 0.728 -0.973	0.0293	0.9144-0.4038	-23.827	1.835	61.724 5205.	-1.64 89239. 85.43
56	292.200	179.700	0.0	4.1 0.150 -0.755 7.2 3.078 -0.829	0.1780	0.9823 0.0582	3.394	10.273	63.749 5205.	-1.64 92169. 91.52
57	295.800	175.000	0.0	3.2 1.133 0.734 4.2 1.437 -0.425	0.0326	0.8362-0.5474	-33.208	2.231	25.827 5350.	1.09 37339.-22.41
58	299.500	170.400	0.0	10.4 -3.648 -0.180 3.5 0.804 1.229	-0.0178	0.8617-0.5071	-30.474	-1.181	32.546 5286.	-0.11 46495. -3.39
59	303.200	165.700	0.0	3.1 -1.293 -0.005 5.1 -3.550 0.327	0.0544	0.8115-0.5819	-35.643	3.835	24.169 5268.	-0.44 35370.-26.50
60	306.800	161.100	0.0	30.2 0.866 0.960 7.2 -0.416 0.879	0.0143	0.9007-0.4341	-25.733	0.907	34.717 5429.	2.59 49595. 3.05
61	310.600	156.500	0.0	30.3 0.163 0.437 1.2 0.856 -0.368	0.0143	0.9007-0.4341	-25.733	0.907	34.717 5286.	-0.11 49596. 3.05
62	314.300	151.800	0.0	12.2 3.372 -0.571 36.5 -3.114 -0.128	-0.1871	0.8700-0.4562	-27.669	-12.139	64.648 5185.	-2.01 95775. 99.01
63	317.800	147.200	0.0	11.1 3.634 -0.390 1.1 -0.235 0.349	0.0086	0.8951-0.4458	-26.476	0.551	29.331 5620.	6.21 44552. -7.43
64	321.500	143.000	0.0	43.3 -3.699 -0.325 24.2 -0.605 0.771	0.0879	0.8672-0.4901	-29.471	5.787	31.631 4989.	-5.73 42649.-11.38
65	325.200	137.800	0.0	41.2 -3.322 -0.049 6.6 -0.421 0.769	0.2865	0.8695-0.4020	-24.810	18.262	40.834 5429.	2.59 58334. 21.21
66	329.000	133.200	0.0	4.2 1.289 -0.318 5.3 3.824 -0.366	-0.5718	0.2821-0.7704	-69.890	-63.743 16.060	5268. -0.44	23504.-51.16
67	332.600	128.600	0.0	12.1 -3.551 0.067 5.3 2.848 0.459	-0.1032	0.8347-0.5410	-32.949	-7.052 27.555	5205. -1.64	39838.-17.22
68	336.200	123.900	0.0	4.1 -0.150 -0.813 4.4 0.825 0.260	-0.0097	0.8929-0.4502	-26.758	-0.624	32.727 5349.	1.09 47317. -1.68
69	339.900	119.300	0.0	4.1 -0.740 -1.052 10.3 -3.375 0.045	0.1159	0.8078-0.5780	-35.583	8.163	29.977 5349.	1.09 43341. -9.94

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES		SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	BALL PERCENT ERROR	
				TANG	RAD	X	Y	Z							
70	343.600	114.700	0.0	3.2	-0.880	0.729									
				7.2	1.361	0.367									
							0.0598	0.8162-0.5747	-35.151	4.191	27.324	5365.	1.38	38575.-19.85	
71	347.400	110.000	0.0	5.4	-2.949	-0.290									
				2.3	-0.430	-0.603									
								-0.6601	0.7091-0.2479	-19.273	-42.952	2.608	5268.	-0.44	3817.-92.07
72	351.000	105.400	0.0	41.2	3.455	-0.517									
				30.3	0.955	0.249									
								0.0465	0.8751-0.4818	-28.835	3.043	31.360	5205.	-1.64	45341.-5.79
73	354.600	100.700	0.0	24.1	3.633	0.570									
				2.3	-0.851	-1.008									
								-0.0652	0.9028-0.4251	-25.215	-4.133	32.407	5268.	-0.44	47425.-1.46
74	358.200	96.100	0.0	36.8	-3.006	0.379									
				30.4	-1.416	0.482									
								0.0869	0.9598-0.2670	-15.545	5.172	48.151	5349.	1.09	69616. 44.65
75	1.900	91.500	0.0	10.3	3.970	-0.117									
				1.1	-0.765	0.192									
								-0.5291	0.5272 0.6649	51.590	-45.106	7.902	5205.	-1.64	11424.-76.26
76	5.500	86.800	0.0	6.4	0.780	0.666									
				43.3	-3.784	-1.035									
								0.0070	0.8249-0.5653	-34.422	0.487	33.029	5365.	1.38	46630. -3.11
77	9.300	82.100	0.0	10.1	2.846	-0.053									
				6.5	0.397	-0.791									
								-0.6893	0.4792-0.5434	-48.592	-55.192	25.745	5185.	-2.01	38140.-20.75
78	12.800	77.500	0.0	5.4	3.359	-0.462									
				4.4	0.911	-0.613									
								0.4126	0.8693-0.2721	-17.377	25.390	72.422	5286.	-0.11	103460.114.98
79	16.500	72.800	0.0	4.1	0.377	-0.895									
				10.2	-3.180	0.998									
								-0.3346	0.8506-0.4055	-25.488	-21.474	32.928	5185.	-2.01	48783. 1.36
80	20.000	68.200	0.0	10.2	-3.975	-0.259									
				4.2	-1.147	-0.354									
								-0.4635	0.8836-0.0662	-4.283	-27.679	40.189	5365.	1.38	56737. 17.89
81	23.800	63.500	0.0	10.1	-2.880	-0.201									
				4.4	-0.868	0.190									
								0.0690	0.8386-0.5403	-32.791	4.703	30.425	5415.	2.32	44525. -7.48
82	27.500	59.000	0.0	3.2	-1.314	0.500									
				2.4	0.138	-0.927									
								0.3459	0.9248 0.1583	9.712	20.507	61.071	5122.	-3.21	89372. 85.70
83	31.000	54.300	0.0	4.5	2.896	0.254									
				5.3	-3.397	-0.858									
								0.1296	0.8149-0.5649	-34.731	9.037	29.378	5429.	2.59	41969.-12.79
84	34.800	49.700	0.0	41.2	3.308	0.030									
				30.3	0.578	0.389									
								0.0088	0.8792-0.4764	-28.454	0.575	29.143	5205.	-1.64	42134.-12.45
85	38.400	45.000	0.0	1.3	0.744	0.966									
				30.4	-0.435	0.822									
								0.0088	0.8792-0.4764	-28.454	0.575	29.143	5205.	-0.44	42648.-11.38
86	42.000	40.400	0.0	12.2	3.471	0.278									
				1.1	0.137	0.362									
								-0.0121	0.9115-0.4112	-24.282	-0.763	81.916	5268.	-0.44	119878.149.09
87	45.600	35.800	0.0	24.2	-0.148	0.784									
				1.1	-1.152	0.037									
								0.0061	0.8391-0.5440	-32.956	0.418	31.299	5365.	1.38	44187. -8.19
88	49.400	31.100	0.0	10.3	3.392	0.059									
				6.4	0.301	0.815									
								0.0312	0.8986-0.4377	-25.971	1.987	30.873	5268.	-0.44	45179. -6.12
89	53.000	26.500	0.0	24.1	-3.817	0.145									
				6.6	-0.491	0.742									
								-0.7008	0.5760-0.4208	-36.152	-50.582	10.663	5268.	-0.44	15604.-67.58

I T I BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. 1-A-3 (3/22/73)

APP. - 1-

SHAFT RPM	BALL DIA.	TEST BALL NO.	PITCH CIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH
8000.	0.750	2	5.6350	2.8175	12.750	34.276

[HC2511 SORT NEGATIVE ARGUMENT=-0.8125009E 02

TRACEBACK ROUTINE CALLED FROM ISN REG. 14 REG. 15 REG. 0 REG. 1

SORT C008 52040C08 00056680 0004B91C 0004D804

CNVRT 6204C888 0004DA90 0004B91C 00049ADC

MAIN 00015354 01049648 FDC000C8 00081FF8

ENTRY POINT= 01049648

STANDARD FIXUP TAKEN : EXECUTION CONTINUING

NO.	POSITION (DEG)	POSITION (DEG)	SEP (IN.)	POS NO.	MEASURED			X	Y	Z	PITCH (DEG)	YAW (DEG)	ROTATION (DEG)	BALL SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED (RPM)	BALL ERROR	
					O.R. T.R.	RAIL TO POINT	COORDINATES TANG RAD											
1	85.100	102.500	0.0	15.4	3.926	-0.637												
				10.4	3.455	0.440												
							0.0351 0.8319-0.5538		-33.651		2.414		31.935	3671.	0.82	30057.	-8.29	
2	89.000	97.900	0.0	16.3	3.331	-0.876												
				5.3	1.235	0.190												
							-0.9467 0.3196-0.0398		-7.106	-71.345		47.581	3576.	-1.77	44783.	36.65		
3	92.800	93.200	0.0	30.1	-3.180	-0.650												
				4.3	0.007	-1.600												
							-0.1788 0.5143-0.8388		-58.484	-19.169		31.286	3671.	0.82	29446.	-10.15		
4	96.700	88.600	0.0	6.1	-3.910	-0.075												
				3.1	-6.700	-0.368												
							0.0005 0.9750-0.2222		-12.836		0.029		53.738	3628.	-0.35	49989.	52.53	
5	100.600	83.900	0.0	22.2	3.375	0.411												
				3.5	0.940	-0.869												
							-0.3876 0.8869 0.2512		15.815	-23.604		17.696	3765.	3.40	16655.	-49.18		
6	104.600	79.400	0.0	3.1	0.182	-0.749												
				10.3	-3.700	-0.357												
							0.0117 0.9853-0.1706		-9.826		0.683		35.950	3535.	-2.91	33442.	2.04	
7	108.400	74.600	0.0	36.5	3.398	0.196												
				7.3	2.903	-0.330												
							0.0117 0.9853-0.1706		-9.826		0.683		35.950	3714.	2.02	34239.	4.47	
8	112.300	70.100	0.0	16.0	-4.013	-0.363												
				5.3	-0.988	-0.458												
							0.4792 0.8224 0.3067		20.453		30.231	114.314	3721.	2.20	106339.	224.47		
9	116.300	65.500	0.0	3.1	0.918	0.385												
				2.2	3.103	-0.194												
							0.1259 0.9919-0.0170		-0.980		7.232	39.665	3671.	0.82	37332.	13.91		

FRAME NO.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP. POS. (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR ROTATION (RPM)	BALL SPEED PERCENT	BALL SPEED PERCENT	
					X	Y	Z					
10	120.200	60.900	0.0	4.2 2.796 -0.399 5.4 0.304 -0.561	-0.9476	0.1615-0.2756	-59.632	-80.328	2.780	3671.	0.82	2617.-92.02
11	124.100	56.300	0.0	10.3 3.360 -0.818 3.5 1.096 0.120	-0.0293	0.9894 0.1424	8.189	-1.699	42.642	3628.	-0.35	39667. 21.04
12	128.000	51.600	0.0	3.1 -0.309 0.922 5.3 1.217 -0.246	0.3272	0.9300-0.1674	-10.203	19.385	13.465	3714.	2.02	12824.-60.87
13	131.900	47.100	0.0	16.3 3.475 -0.160 30.2 -3.640 -0.328	-0.4806	0.8031-0.3522	-23.679	-30.898	4.255	3671.	0.82	4005.-87.78
14	135.800	42.500	0.0	5.4 0.400 0.787 3.2 -0.205 0.585	0.4228	0.8194 0.3871	25.284	27.291	4.379	3721.	2.20	4074.-87.57
15	139.800	37.900	0.0	22.2 3.289 -0.764 5.3 0.205 1.329	-0.0081	0.9611 0.2760	16.021	-0.482	19.559	3576.	-1.77	18408.-43.83
16	143.600	33.200	0.0	3.1 -0.144 -0.686 5.3 -0.469 1.206	-0.1987	0.8836 0.4241	25.639	-12.673	6.197	3765.	3.40	5832.-82.20
17	147.600	28.700	0.0	36.3 3.583 -0.301 5.3 -0.948 0.694	0.0521	0.9978-0.0417	-2.396	2.988	36.482	3628.	-0.35	33936. 3.55
18	151.500	24.000	0.0	30.2 3.732 -0.154 3.1 0.759 -0.340	-0.0871	0.9960 0.0217	1.249	-4.999	31.577	3765.	3.40	29720. -9.32
19	155.400	19.500	0.0	3.1 0.972 -0.110 5.4 -0.385 -0.398	-0.0871	0.9960 0.0217	1.249	-4.999	31.577	3671.	0.82	29720. -9.32
20	159.400	14.900	0.0	6.2 3.390 -0.562 4.4 1.058 -0.523	-0.9028	0.1311 0.4096	72.248	-81.736	6.278	3576.	-1.77	5909.-81.97
21	163.200	10.200	0.0	22.1 -3.265 -0.283 5.4 -0.540 -0.541	-0.0363	0.9903-0.1342	-7.716	-2.100	36.465	3671.	0.82	34320. 4.72
22	167.100	5.600	0.0	10.4 3.452 -0.065 4.4 1.067 0.833	0.2070	0.9779 0.0292	1.708	11.950	42.823	3671.	0.82	40304. 22.98
23	171.000	1.000	0.0	36.5 -3.269 -0.104 5.3 1.278 0.086	0.3544	0.9351 0.0090	0.554	20.755	25.228	3721.	2.20	23468.-28.39
24	175.000	356.400	0.0	3.1 -0.768 0.438 5.4 0.624 0.651	0.0489	0.9966-0.0661	-3.793	2.809	30.840	3576.	-1.77	29026.-11.43
25	178.800	351.700	0.0	4.4 -0.820 1.051 5.3 0.608 1.202	0.0304	0.9900-0.1380	-7.935	1.758	53.793	3721.	2.20	50040. 52.69
26	182.800	347.100	0.0	22.2 3.332 -0.005 3.5 0.723 -0.869	-0.5306	0.8421 0.0965	6.535	-32.214	15.457	3619.	-0.59	14721.-55.08
27	186.600	342.500	0.0	36.1 3.611 -0.990 3.5 1.187 -0.373	-0.0115	0.9998 0.0135	0.774	-0.661	33.934	3628.	-0.36	31566. -3.68
28	190.500	337.800	0.0	3.5 1.256 0.420 36.5 3.310 -0.217	0.1346	0.9906 0.0253	1.463	7.739	41.346	3671.	0.82	38914. 18.74
29	194.400	333.200	0.0	3.5 0.860 1.090 5.3 -1.120 -0.225	-0.1262	0.9821-0.1396	-8.092	-7.322	20.860	3671.	0.82	19633.-40.09

FRAME NO.	I.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SFP POS (IN.)	MEASURED COORDINATES NO. TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	BALL PERCENT ERROR
					X	Y	Z						
30	-198.300	328.600	0.0	3.1 -0.886 4.4 0.725	0.332 -0.837								
31	202.200	323.900	0.0	6.5 3.454 5.4 0.142	0.223 -0.549	0.0297 0.9850-0.1701	-0.1457 0.9865-0.0754	-9.798 -4.373	1.730 -8.400	25.394 31.248	3628. 3671.	-0.35 0.82	23622. -27.92 29410. -10.26
32	206.100	319.300	0.0	10.1 -2.995 3.1 0.270	-0.537 1.007								
33	210.000	314.700	0.0	3.5 -1.247 36.1 -3.783	0.228 -0.283		-0.0336 0.9982 0.0498	2.854	-1.926	32.785	3671.	0.82	30857. -5.85
34	213.900	310.100	0.0	5.4 0.695 3.1 -0.618	0.462 0.710	0.0118 0.9989-0.0446	-0.0757 0.9940-0.0794	-2.558 -4.566	0.675 -4.354	33.683 20.322	3671. 3619.	0.82 -0.59	31701. -3.27 19355. -40.94
35	217.700	305.500	0.0	5.4 0.474 16.5 3.457	0.801 0.005	0.0829 0.9963 0.0241	1.383	4.755	38.773	3678.	1.02	35653. 8.79	
36	221.700	300.800	0.0	3.5 0.256 5.3 0.315	-1.024 1.350	0.0294 0.9378-0.3459	-0.1677 0.9823 0.0835	-20.246 4.860	1.763 -9.688	30.068 19.366	3576. 3721.	-1.77 2.20	28299. -13.65 18015. -45.03
37	225.500	296.100	0.0	22.2 3.338 3.1 -0.343	0.680 -0.563								
38	229.500	291.500	0.0	36.1 3.792 3.1 0.136	-0.195 -0.656	-0.2087 0.9354-0.2853	-0.1677 0.9823 0.0835	-16.960 4.860	-12.578 -9.688	121.888 19.366	3671.	0.82	114717.250.04
39	233.400	286.900	0.0	4.4 -0.403 9.3 2.821	-0.945 -0.241		-0.0169 0.8569-0.5152	-31.018	-1.131	155.125	3619.	-0.60	147736.350.79
40	237.200	282.300	0.0	30.1 3.321 1.2 3.832	0.437 -0.539		-0.0169 0.8569-0.5152	-31.018	-1.131	155.125	3628.	-0.35	144303.340.32
41	241.100	277.600	0.0	5.3 -0.450 6.4 3.717	-0.922 -0.518	0.1176 0.8179 0.5632	34.547	8.181	28.775	3671.	0.82	27083. -17.36	
42	245.000	273.000	0.0	4.2 2.731 3.5 -0.692	-0.194 1.235	-0.0323 0.9995-0.0018	-0.105	-1.852	30.335	3628.	-0.36	28218. -13.90	
43	249.900	268.300	0.0	3.5 -1.117 4.4 1.154	0.684 0.670	0.1145 0.9922-0.0494	-2.853	6.585	23.455	3576.	-1.77	22075. -32.64	
44	252.700	263.600	0.0	9.3 3.490 5.4 0.772	-0.705 0.156	-0.0072 0.9983 0.0586	3.360	-0.415	35.531	3671.	0.82	33442. 2.04	
45	256.600	259.000	0.0	3.5 -0.806 3.1 -0.714	-0.721 0.598	0.0222 0.9984-0.0515	-2.955	1.271	29.950	3628.	-0.35	27860. -14.99	
46	260.500	254.300	0.0	3.1 -0.830 5.4 0.310	0.147 0.856	0.0020 0.9999-0.0106	-0.605	0.117	35.695	3628.	-0.35	33205. 1.32	
47	254.400	249.600	0.0	3.5 0.567 6.3 -3.700	-0.983 -0.689	0.0402 0.9948-0.0933	-5.357	2.312	34.083	3671.	0.82	32079. -2.12	
48	268.300	245.000	0.0	3.5 1.076 5.3 -0.627	-0.517 1.177	0.0032 0.9986-0.0528	-3.029	0.186	36.266	3576.	-1.77	34132. 4.15	
49	272.100	240.300	0.0	3.5 1.256 5.3 -1.075	0.239 0.689	0.1463 0.9892 0.0083	0.480	8.411	25.759	3721.	2.20	23962. -26.88	

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SER. POS. (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS ROTATION (DEG)	BALL (DEG)	SEPARATOR (RPM)	BALL SPEED (RPM)		
					X	Y	Z						
50	276.100	235.700	0.0	3.5 -1.010 0.926 7.2 2.831 0.511	0.0349	0.9992	0.0189	1.084	2.003	35.215	3576.	-1.77	33143. 1.13
51	279.900	231.000	0.0	16.4 -3.349 -0.590 5.3 -0.856 -0.648	-0.4612	0.8174	0.3452	22.894	-29.435	28.864	3619.	-0.60	27490. -16.12
52	283.700	226.400	0.0	10.3 -4.077 -0.350 4.4 1.060 -0.498	0.1787	0.8169	0.5485	33.879	12.338	80.717	3576.	-1.77	75969.131.81
53	237.500	221.700	0.0	6.1 -2.803 0.353 5.3 0.465 -0.942	-0.2002	0.9622	0.1846	10.860	-11.751	72.505	3721.	2.20	67446.105.80
54	291.500	217.100	0.0	10.4 -3.454 0.092 4.4 0.983 0.884	0.0382	0.9992	-0.0154	-0.880	2.189	36.540	3576.	-1.77	34391. 4.94
55	295.300	212.400	0.0	9.2 -3.008 -0.145 5.4 0.737 0.294	0.0057	1.0000	-0.0051	-0.291	0.325	32.526	3628.	-0.35	30256. -7.68
56	299.200	207.700	0.0	30.1 -3.298 -0.167 5.4 0.605 0.684	-0.0263	0.9954	-0.0924	-5.305	-1.513	38.334	3576.	-1.77	36079. 10.09
57	303.000	203.000	0.0	3.5 -0.100 -1.069 3.1 -0.774 -0.144	-0.3520	0.9301	0.1055	6.470	-20.728	10.631	3714.	2.02	10125. -69.10
58	306.500	198.500	0.0	22.2 -3.350 0.123 5.4 -0.167 0.376	0.0027	0.9792	0.2028	11.658	0.156	23.358	3619.	-0.60	22245. -32.12
59	310.700	193.900	0.0	3.1 -0.015 -0.708 3.5 1.214 -0.261	-0.1679	0.9783	-0.1212	-7.062	-9.736	21.560	3628.	-0.35	20056. -38.80
60	314.600	189.200	0.0	36.5 -3.340 -0.115 4.4 -0.577 -0.857	0.0338	0.9991	0.0253	1.452	1.938	36.055	3628.	-0.35	33539. 2.34
61	318.500	184.500	0.0	4.4 -0.095 -1.043 5.3 -1.112 -0.243	0.0314	0.9980	-0.0552	-3.168	1.802	33.803	3671.	0.82	31815. -2.92
62	322.400	179.900	0.0	3.5 -0.260 1.390 3.2 0.292 0.273	0.0314	0.9980	-0.0552	-3.168	1.802	33.803	3566.	-2.05	32581. -0.58
63	326.100	175.300	0.0	3.5 -0.404 1.302 5.3 -1.060 0.020	0.0037	0.9947	-0.1024	-5.879	0.214	32.973	3628.	-0.35	30672. -6.41
64	330.000	170.600	0.0	3.1 -0.230 -0.975 4.4 1.247 0.403	0.0114	0.9987	-0.0489	-2.803	0.654	32.658	3671.	0.82	30737. -6.21
65	333.500	166.000	0.0	3.1 -0.224 0.946 5.3 1.131 -0.390	0.0084	0.9989	-0.0467	-2.676	0.479	36.232	3535.	-2.91	33704. 2.84
66	337.200	161.200	0.0	3.1 -0.604 0.676 5.3 1.210 0.410	-0.0521	0.9982	-0.0301	-1.728	-2.990	27.344	3714.	2.02	26042. -20.54
67	341.600	156.700	0.0	3.1 -0.804 0.241 4.4 -0.505 1.272	0.0230	0.9741	0.2249	13.002	1.355	4.519	3628.	-0.35	4203. -87.17
68	345.500	152.000	0.0	8.6 -3.976 -0.358 4.4 -1.014 0.783	-0.2718	0.9609	0.0539	3.209	-15.794	31.233	3628.	-0.35	29054. -11.35
69	349.400	147.300	0.0	3.1 -0.400 -0.597 4.2 -2.760 -0.088	-0.3750	0.9215	-0.1007	-6.236	-22.146	1.209	3576.	-1.77	1138. -96.53

FRAME NO.	O.R. (DEG)	I.R. (DEG)	BALL TO POINT POSITION (IN.)	MEASURED SEP. POS. NO.	COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	
						X	Y	Z				
70	-353.200	142.600	C.0	36.1	3.750	-0.125						
				4.4	-0.959	-0.544						
							-0.2228	0.9742	0.0351	2.061	-12.881	
71	357.000	138.000	O.0	9.2	-2.950	0.427				36.703	3619.	-0.60
				4.4	-0.496	-0.551						34955.
							0.0962	0.9933	-0.0635	-3.660	5.533	6.66
72	-0.800	133.300	O.0	5.3	-0.998	-0.486						
				3.5	0.725	1.160						28202.
							-0.1004	0.9821	-0.1597	-9.234	-5.835	-13.95
73	4.700	128.700	O.0	3.1	0.837	0.435				23.083	3671.	0.82
				4.4	0.886	-0.694						21725.
							0.0230	0.9983	-0.0534	-3.062	1.318	-33.940
74	8.500	124.000	O.0	3.1	0.545	0.193						31943.
				4.2	2.720	-0.258						-2.53
							-0.0012	0.9995	-0.0324	-1.857	-0.071	32681.
75	-12.400	119.400	O.0	4.4	1.145	0.623				34.723	3671.	0.82
				10.1	3.070	0.065						
							-0.0242	0.9971	-0.0718	-4.116	-1.388	-4.35
76	16.100	114.600	O.0	36.3	-3.495	-0.390				31.249	3628.	29411.
				3.5	-1.196	-0.135						-10.26
							0.0566	0.9922	-0.1110	-6.384	3.265	35.485
77	19.900	110.000	O.0	3.1	-0.754	0.429				3619.	-0.60	33795.
				5.3	1.183	0.542						3.12
							0.1379	0.9904	0.0001	0.007	7.929	15.105
78	23.800	105.300	O.0	3.4	2.725	0.184				3628.	-0.35	14051.
				3.5	-0.120	-1.085						-57.13
							-0.0592	0.9752	-0.2134	-12.346	-3.473	48.368
79	-27.700	100.700	O.0	22.2	3.304	-0.584				3671.	0.82	45523.
				3.5	0.533	-1.044						38.91
							-0.2242	0.9187	0.3250	19.483	-13.713	17.078
80	-31.500	96.000	O.0	3.1	-0.133	-0.745				3576.	-1.77	16074.
				4.4	-1.179	-0.193						-50.95
							0.1734	0.9821	-0.0731	-4.259	10.010	31.757
81	35.200	91.300	O.0	36.5	3.575	-0.160				3524.	-3.21	30244.
				3.1	0.350	-0.662						-7.71
							0.0779	0.9874	-0.1380	-7.954	4.505	21.849
82	39.200	86.700	O.0	3.1	0.734	-0.418				3721.	2.20	20325.
				4.4	-0.129	-1.104						-37.98
							-0.5645	0.2920	-0.7720	-69.285	-62.653	8.463
83	43.000	82.000	O.0	3.4	-3.431	0.225				3576.	-1.77	7965.
				3.5	0.550	1.421						-75.70
							0.0989	0.8760	0.4720	28.317	6.439	22.734
84	46.800	77.300	O.0	6.5	3.432	-0.500				3576.	-1.77	21396.
				5.3	-0.188	-1.065						-34.71
							0.0446	0.9990	-0.0068	-0.388	2.553	31.414
85	50.600	72.600	O.0	3.5	-0.777	0.968				3576.	-1.77	29566.
				5.4	0.407	-0.533						-9.79
							-0.0026	0.9977	-0.0678	-3.885	-0.147	36.682
86	54.500	68.000	O.0	3.5	-1.162	0.331				3671.	0.82	34524.
				5.3	1.070	-0.572						5.34
							-0.0156	0.9998	-0.0088	-0.503	-0.896	27.197
87	58.300	63.300	O.0	36.5	-3.245	-0.238				3576.	-1.77	25597.
				3.1	-0.447	0.743						-21.90
							0.1425	0.9885	-0.0512	-2.967	8.204	29.487
88	62.200	58.700	O.0	16.5	3.417	-0.746				3671.	0.82	27752.
				3.5	-0.578	-0.995						-15.32
							-0.1611	0.9829	-0.0895	-5.205	-9.311	30.858
89	66.100	54.000	O.0	8.1	3.612	-0.435				3628.	-0.35	28705.
				3.5	0.151	-1.202						-12.41
							-0.0127	0.9998	0.0172	0.986	-0.727	33.880
												31887.
												-2.70

FRAME NO.	O.R. (DEG)	I.R. (DEG)	BALL TO POINT SEP. POS. (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	BALL PERCENT ERROR		
					X	Y	Z						
90	70.000	49.400	0.0	5.4 -0.192 0.817 3.1 -0.440 -0.574	-0.0347	0.8713	0.4895	29.329	-2.279	6.267	3628. -0.35	5830. -82.21	
91	73.500	44.700	0.0	36.1 3.700 -0.960 10.1 -2.980 0.144	0.2906	0.9540	-0.0736	-4.413	16.944	25.356	3663.	0.60	24439. -25.43
92	77.700	40.200	0.0	36.8 3.927 -0.865 3.5 1.313 0.324	0.3665	0.7502	-0.5504	-36.269	26.037	48.245	4108.	12.84	52157. 59.15
93	81.500	36.600	0.0	43.3 3.872 -0.321 5.4 -0.538 -0.379	0.0578	0.9169	0.3950	23.305	3.605	68.210	3250. -10.73	56842. 73.44	
94	85.400	30.900	0.0	5.3 -0.646 -0.868 4.4 0.870 -0.561	0.1242	0.9923	0.0028	0.161	7.133	24.527	3671.	0.82	23084. -29.56
95	89.300	26.300	0.0	3.1 0.712 0.631 6.5 3.465 0.181	0.1158	0.9930	-0.0234	-1.347	6.653	39.901	3628. -0.35	37117. 13.26	
96	93.200	21.600	0.0	10.3 3.740 -0.768 4.4 1.258 0.363	-0.4866	0.8669	0.1081	7.106	-29.307	23.550	3671.	0.82	22165. -32.37
97	97.100	17.000	0.0	15.4 3.970 -0.403 9.2 2.780 -0.975	-0.0571	0.9983	-0.0077	-0.445	-3.274	38.172	3671.	0.82	35926. 9.62
98	101.000	12.400	0.0	16.3 3.411 -0.644 9.2 3.061 0.328	-0.0571	0.9983	-0.0077	-0.445	-3.274	38.172	3671.	0.82	35926. 9.62
99	104.900	7.800	0.0	5.4 0.572 0.649 16.5 3.537 -0.053	0.4064	0.9117	0.0613	3.849	24.024	58.808	3619. -0.60	56007. 70.90	
100	108.700	3.200	0.0	6.1 -3.837 -0.322 5.4 0.200 0.819	0.1494	0.9398	-0.3074	-18.114	9.032	75.108	5349.	1.09	108592. 125.64
100	108.700	3.200	0.0	6.1 -3.837 -0.322 5.4 0.200 0.819	0.1494	0.9398	-0.3074	-18.114	9.032	75.108	5349.	1.09	108592. 125.64
AVG. SPEED (RPM)			AVG. ABS(SPEED ERROR) (PERCENT)		AVERAGE YAW (DEG.)	AVERAGE PITCH (DEG.)	MEAN BALL POSITION (DEG.)						
SEPARATOR	3640.76			1.4530									
BALL	32772.62			39.3231				-3.511	-1.465	0.0			

ITI BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. 1-A-4 (3/22/73)

APP. - I-

	SHAFT RPM	BALL DIA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH									
FRAME NO.	C.R. (DEG)	I.R. (DEG)	BALL TO POINT POSITION	MEASURED COORDINATES TANG RAD	SPIN AXIS X	SPIN AXIS Y	SPIN AXIS Z	PITCH (DEG)	YAW (DEG)	ROTATION (DEG)	BALL SPEED (RPM)	SEPARATOR SPEED (RPM)	BALL SPEED PERCENT			
			SEP POS (IN.)													
1	69.600	334.100	0.0	16.4 6.6	3.591 -2.985	-0.165 -0.832		-0.4567 0.5344	0.7485-0.4809 0.6025-0.5928	-32.718 -44.534	-31.388 41.568	32.712 49.449	3494. 3535.	-0.83 0.32	30080. 45999.	-2.17 49.60
2	73.400	329.200	0.0	11.4 15.4	-3.609 -0.572	-1.148 1.176										
3	77.200	324.400	0.0	12.2 9.3	-4.089 -0.567	-0.593 1.234		0.0347 0.0347	0.5122-0.78582 0.6025-0.5928	-59.169	-3.879	94.308	3494. 3535.	-0.83 0.32	86721. 86721.	182.04
4	81.000	319.500	0.0	7.2 3.5	3.544 -2.612	-0.562 0.148		-0.0085 -0.0085	0.8727-0.4881 0.8727-0.4881	-29.219	-0.556	32.640	3391. 3535.	-3.76 -3.76	28383. 28383.	-7.69
5	84.900	314.200	0.0	30.1 5.2	3.578 -1.470	-0.100 0.295		0.0530 0.0530	0.8956-0.4416 0.8956-0.4416	-26.248	3.385	31.474	3086. 3535.	-12.43 -12.43	35970. 35970.	16.99
6	87.600	309.900	0.0	16.5 2.4	-3.953 1.482	-0.258 0.390		-0.0393 -0.0393	0.8431-0.5363 0.8431-0.5363	-32.461	-2.667	34.638	3959. 3535.	12.35 0.32	28568. 37051.	-7.09 20.50
7	92.400	305.000	0.0	6.4 4.1	3.451 0.720	-0.886 -0.761		0.1558 0.1558	0.8826-0.7436 0.8826-0.7436	-26.684	10.013	39.830	3635. 3535.	0.32 0.32	37051. 37051.	20.50
8	96.200	300.200	0.0	11.3 3.5	3.984 -2.971	-0.617 -0.625		-0.1980 -0.1980	0.8751-0.4416 0.8751-0.4416	-26.775	-12.751	28.159	3545. 3535.	0.62 0.62	25599. 25599.	-16.74
9	100.100	295.300	0.0	7.3 2.2	-3.737 -1.183	-0.393 0.290		0.1238 0.1238	0.7410-0.6600 0.7410-0.6600	-41.692	9.484	16.333	3494. 3535.	-0.83 -0.83	15019. 15019.	-51.15

FRAME NO.	D.R. (DEG)	I.R. (DEG)	BALL TO POINT POSITION (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR SPEED PERCENT	BALL SPEED PERCENT
					X	Y	Z			
10	103.900	290.400	0.0	30.1 6.4	-3.737 -0.764	-0.085 1.751				
11	107.700	285.600	0.0	6.3 10.1	-2.695 0.700	-0.680 -0.905		-0.0376 0.9001-0.4341	-25.749	-2.392 49.896 3535. 0.32 46415. 50.96
12	111.500	280.700	0.0	6.4 10.1	-3.342 0.095	-0.697 -0.720		0.0972 0.8856-0.4542	-27.156	6.261 29.475 3494. -0.83 27104. -11.85
13	115.400	275.800	0.0	11.1 10.3	-3.551 -1.440	-0.849 -0.211		0.0880 0.8903-0.4468	-26.651	5.646 30.307 3545. 0.62 27551. -10.39
14	119.200	270.900	0.0	13.1 4.5	-3.521 0.450	-0.554 -1.081		-0.0333 0.8991-0.4365	-25.894	-2.121 35.695 3494. -0.83 32824. 6.75
15	123.000	266.100	0.0	15.4 7.2	-2.823 3.585	-0.588 -0.658		0.0870 0.8773-0.4720	-28.281	5.666 25.875 3535. 0.32 26069. -21.72
16	126.900	261.200	0.0	2.3 4.4	3.198 0.540	-0.640 -0.936		0.0110 0.8943-0.4474	-26.576	0.704 31.756 3545. 0.62 28869. -6.11
17	130.600	256.400	0.0	3.5 4.4	-0.166 -0.060	1.625 -0.841		-0.0402 0.8991-0.4359	-25.866	-2.563 29.195 3482. -1.17 27477. -10.63
18	134.500	251.500	0.0	6.4 4.3	3.443 0.240	-1.060 -0.866		0.0424 0.8859-0.4619	-27.534	2.743 35.512 3545. 0.62 32284. 5.00
19	138.300	246.600	0.0	11.1 2.2	3.596 0.283	-0.691 0.557		0.0474 0.8915-0.4506	-26.813	3.042 34.141 3494. -0.83 31394. 2.11
20	142.200	241.700	0.0	11.4 6.3	3.345 -0.106	0.156 1.148		0.0229 0.8879-0.4595	-27.360	1.479 32.658 3545. 0.62 29689. -3.44
21	146.000	236.900	0.0	4.2 10.2	-0.165 1.370	-1.060 0.184		-0.0233 0.8986-0.4382	-25.994	-1.486 30.885 3535. 0.32 28730. -6.56
22	149.800	232.000	0.0	15.3 10.3	3.910 0.990	-0.486 0.090		0.0778 0.9117-0.4035	-23.874	4.878 42.182 3494. -0.83 38789. 26.15
23	153.600	227.200	0.0	10.1 6.4	0.120 -3.311	-0.734 -0.477		0.0103 0.9118-0.4106	-24.242	0.645 31.971 3535. 0.32 29740. -3.27
24	157.500	222.400	0.0	10.1 15.4	-0.485 -0.110	-0.853 1.255		0.0386 0.8157-0.5771	-35.280	2.711 23.813 3586. 1.78 21897. -28.78
25	161.300	217.500	0.0	13.3 9.3	-3.296 -0.518	0.360 1.347		0.0702 0.8968-0.4369	-25.976	4.479 39.592 3494. -0.83 36406. 18.41
26	165.100	212.600	0.0	7.2 9.2	-3.585 -1.203	-1.030 0.665		-0.6347 0.4303 0.6419	56.162	-55.863 19.592 3494. -0.83 18015. -41.41
27	168.900	207.800	0.0	5.2 3.2	-1.132 0.996	0.477 0.125		0.0238 0.8730-0.4871	-29.160	1.562 140.112 3535. 0.32 130337. 323.90
28	172.700	202.900	0.0	3.1 2.1	0.426 2.977	0.275 -0.628		-0.0235 0.8678-0.4963	-29.766	-1.551 33.522 3494. -0.83 30825. 0.25
29	176.600	198.100	0.0	6.3 4.4	2.649 -0.578	-0.434 -1.001		0.0164 0.8787-0.4772	-28.504	1.070 32.701 3586. 1.77 30070. -2.20
								0.1099 0.9045-0.4121	-24.498	6.929 36.028 3494. -0.83 33129. 7.75

FRAME NO.	D.E. POSITION (DEG)	T.E. POSITION (SEC)	BALL TO POINT SEQ PLUS NO.	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED PERCENT (RPM)	BALL SPEED PERCENT (RPM)	BALL ERROR
					X	Y	Z						
30	180.400	193.200	0.0	3.5 6.4 2.970 0.356	-2.807 -0.188 2.970 0.356	-0.0519 0.8804-0.4715	-28.171	-3.374	31.649	3545.	0.62	28772.	-6.42
31	184.300	188.300	0.0	2.2 6.5 0.316 0.364	-0.483 0.425 0.316 0.364	0.0227 0.8528-0.5217	-31.458	1.527	28.725	3535.	0.32	26721.	-13.09
32	188.100	183.500	0.0	6.5 13.1 3.186 0.438	-0.933 0.162 3.186 0.438	0.0857 0.9155-0.3930	-23.234	5.347	34.138	3494.	-0.83	31391.	2.09
33	191.900	178.600	0.0	1.1 10.1 0.856 -1.012	-3.982 -0.116 0.856 -1.012	0.0924 0.8649-0.4933	-29.699	6.100	31.910	3494.	-0.83	29342.	-4.57
34	195.700	173.700	0.0	6.2 10.2 -1.028 0.295	-3.764 -0.389 -1.028 0.295	0.0715 0.8722-0.4839	-29.021	4.684	31.957	3586.	1.77	29386.	-4.43
35	199.600	168.900	0.0	11.3 10.3 -1.188 -0.070	-3.723 0.326 -1.188 -0.070	-0.1637 0.5732-0.8029	-54.480	-15.939	20.110	3494.	-0.83	18492.	-39.86
36	203.400	164.000	0.0	9.2 10.1 -1.247 -0.440	0.502 0.920 -1.247 -0.440	-0.0205 0.9467-0.3213	-18.748	-1.241	44.077	3576.	1.50	41484.	34.92
37	207.200	159.300	0.0	5.2 3.5 2.962 -0.350	0.440 0.740 2.962 -0.350	0.0413 0.8946-0.4451	-26.451	2.644	31.402	3545.	0.62	28547.	-7.15
38	211.100	154.400	0.0	15.3 4.4 0.677 -1.011	-3.766 -0.137 0.677 -1.011	-0.0147 0.8516-0.5240	-31.607	-0.989	32.801	3494.	-0.83	30162.	-1.90
39	214.900	149.500	0.0	4.4 5.3 -1.263 -0.412	0.121 -0.831 -1.263 -0.412	-0.0180 0.8772-0.4798	-28.677	1.172	34.393	3494.	-0.83	31626.	2.86
40	218.700	144.600	0.0	4.3 2.4 0.687 0.786	0.412 -0.904 0.687 0.786	0.0535 0.8650-0.4990	-29.980	3.542	31.323	3494.	-0.83	28803.	-6.32
41	222.500	139.700	0.0	6.4 2.1 0.736 1.270	3.112 0.171 0.736 1.270	0.0282 0.8970-0.4411	-26.188	1.799	31.295	3586.	1.77	28777.	-6.41
42	226.400	134.900	0.0	7.3 6.3 0.315 1.160	-3.472 0.385 0.315 1.160	0.0237 0.8531-0.5212	-31.422	1.591	32.937	3494.	-0.83	30287.	-1.50
43	230.200	130.000	0.0	13.1 4.2 -0.070 -1.030	3.283 0.295 -0.070 -1.030	-0.5805 0.5332-0.6155	-49.098	-47.433	19.087	3535.	0.32	17756.	-42.25
44	234.000	125.200	0.0	15.4 4.2 -1.533 -1.249	2.859 -0.504 -1.533 -1.249	-0.4342 0.4896-0.7561	-57.078	-41.572	24.843	3545.	0.62	22584.	-26.55
45	237.900	120.300	0.0	10.1 16.3 3.545 -0.836	0.325 -0.745 3.545 -0.836	-0.0088 0.9092-0.4163	-24.602	0.553	32.959	3535.	0.32	30660.	-0.28
46	241.700	115.500	0.0	10.1 9.1 0.868 -0.414	-0.325 -0.775 0.868 -0.414	-0.0004 0.8514-0.5245	-31.636	-0.028	29.305	3535.	0.32	27260.	-11.34
47	245.500	110.700	0.0	5.1 3.6 3.600 0.120	1.358 -0.085 3.600 0.120	0.1196 0.9242-0.3626	-21.423	7.375	34.693	3545.	0.62	31539.	2.57
48	249.400	105.800	0.0	13.3 5.4 -1.247 -0.469	-3.681 -0.910 -1.247 -0.469	-0.0113 0.8560-0.5169	-31.128	-0.758	34.533	3535.	0.32	32123.	4.48
49	253.200	101.000	0.0	5.2 9.3 -2.817 -0.252	-0.789 0.655 -2.817 -0.252	-0.0121 0.8468-0.5318	-32.130	-0.820	34.736	3455.	-1.96	31578.	2.70

FRAME NO.	C.F. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR SPEED PERCENT (RPM) ERROR	BALL SPEED PERCENT (RPM) ERROR
					X	Y	Z			
50	257.000	96.000	0.0	3.1 1.2	0.721 3.778	0.157 -0.230	-	-	-	-
51	260.900	91.200	0.0	3.2 4.4	-1.065 -0.417	0.143 -0.896	0.0036 0.9129-0.4081	-24.087	0.229	30.132 3586. 1.77 27708. -9.88
52	264.700	86.400	0.0	3.6 2.4	-3.785 -0.530	-1.196 0.811	0.0036 0.9129-0.4081	-24.087	0.229	30.132 3535. 0.32 28029. -8.84
53	268.500	81.500	0.0	4.1 6.5	-0.392 0.666	-0.631 0.280	0.0278 0.8332-0.5522	-33.534	1.912	32.441 3494. -0.83 29830. -2.98
54	272.400	76.600	0.0	2.3 6.3	-3.037 -1.023	-0.405 0.955	0.0287 0.9132-0.4065	-23.994	1.802	34.377 3545. 0.62 31253. 1.64
55	276.200	71.700	0.0	10.1 15.4	0.569 2.924	+1.131 -0.700	-0.0744 0.8513-0.5193	-31.384	-4.996	24.901 3494. -0.83 22897. -25.53
56	280.000	66.900	0.0	9.3 6.4	2.915 -3.006	-0.322 0.217	0.0855 0.8687-0.4880	-29.324	5.624	41.887 3535. 0.32 38965. 26.73
57	283.800	62.100	0.0	10.3 12.1	-0.908 -4.088	0.126 -0.247	-0.0964 0.9171-0.3867	-22.865	-6.002	26.376 3535. 0.32 24537. -20.20
58	287.600	57.200	0.0	10.4 9.3	-1.030 0.853	-0.247 0.845	0.2316 0.2607-0.9372	-74.458	41.620	23.881 3494. -0.83 21960. -28.58
59	291.500	52.400	0.0	3.5 5.3	3.110 0.450	-0.781 0.324	-0.3843 0.7590-0.5256	-34.706	-26.852	41.256 3586. 1.78 37936. 23.38
60	295.200	47.500	0.0	15.3 5.1	-3.514 -0.793	0.337 0.168	0.5107 0.8359-0.2013	-13.539	31.423	9.376 3442. -2.32 8722. -71.63
61	299.100	42.600	0.0	3.2 4.4	0.320 0.290	0.339 -0.887	0.0642 0.8190-0.5702	-34.847	4.480	31.546 3545. 0.62 28678. -6.73
62	302.900	37.800	0.0	3.2 4.4	-0.911 -0.272	0.139 -0.876	0.0642 0.8190-0.5702	-34.847	4.480	31.546 3494. -0.83 29007. -5.66
63	306.700	32.900	0.0	3.1 4.1	-1.369 0.463	-0.221 -0.632	-0.0046 0.8564-0.5163	-31.034	-0.305	30.542 3535. 0.32 28411. -7.60
64	310.500	28.100	0.0	4.1 2.1	-0.257 -0.407	-0.580 1.341	-0.0200 0.8932-0.4492	-26.695	-1.286	33.978 3545. 0.62 30890. 0.46
65	314.400	23.200	0.0	4.2 6.5	0.070 -0.400	-1.007 0.349	0.0061 0.9037-0.4281	-25.346	0.386	35.846 3535. 0.32 33345. 8.45
66	318.200	18.400	0.0	6.5 3.2	-1.501 -0.400	-0.247 -1.143	0.1810 0.8047-0.5654	-35.095	12.680	24.235 3494. -0.83 22285. -27.52
67	322.000	13.500	0.0	10.4 6.4	1.148 -2.869	-0.314 0.427	-0.0152 0.8509-0.5252	-31.683	-1.021	33.247 3494. -0.84 30572. -0.57
68	325.800	8.600	0.0	10.1 16.4	-0.137 3.438	-0.757 0.129	-0.6101 0.6176-0.4963	-39.786	-44.646	47.109 3535. 0.32 43822. 42.53
69	329.600	3.800	0.0	3.5 15.4	3.751 -0.811	-0.438 1.200	-0.6399 0.3689 0.6741	61.310	-60.037	12.149 3494. -0.83 11172. -63.67

FRAME NO.	C.R. POSITION (DEG)	I.P. POSITION (DEG)	BALL TO POINT SEP POS. (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED PERCENT	BALL SPEED PERCENT			
					X	Y	Z								
70	333.400	358.900	0.0	9.2 5.3	-0.408 1.153	0.926 -0.320									
71	337.400	354.100	0.0	3.2 5.1	1.527 -0.615	-0.180 0.272	-0.0109 -0.0238	0.8707-0.4917 0.8698-0.4929	-29.453 -29.539	-0.714 -1.571	33.026 29.273	3636. 3482.	3.20 -1.17	30024. 27551.-10.39	
72	341.100	349.300	0.0	3.1 30.1	1.004 3.450	0.680 0.254									
73	345.000	344.400	0.0	3.2 4.4	-0.758 -0.270	0.230 -0.072		0.0249 0.0249	0.9094-0.4153 0.9094-0.4153	-24.544 -24.544	1.571 1.571	31.156 31.156	3546. 3442.	0.62 -2.32	28323. 28983.-5.74
74	349.700	339.500	0.0	4.4 6.4	-0.751 3.341	-1.149 -0.565		0.0249 0.0249	0.9094-0.4153 0.9094-0.4153	-24.544 -24.544	1.571 1.571	31.156 31.156	3442. 3442.	-2.32 -2.32	28983. 28983.-5.74
75	352.600	334.700	0.0	4.3 6.5	-0.545 0.948	-1.001 0.146		-0.0554 0.0371	0.8879-0.4566 0.9063-0.4210	-27.214 -24.915	-3.567 2.342	29.295 33.911	3586. 3494.	1.77 -0.84	26938.-12.39 31181. 1.41
76	356.400	329.800	0.0	2.3 4.1	-2.870 -0.843	0.035 -0.884									
77	0.100	325.000	0.0	10.2 13.3	0.968 3.131	0.377 0.693		-0.0011 0.0030	0.8330-0.5532 0.9112-0.4120	-33.590 -24.329	-0.078 0.188	31.717 32.170	3482. 3586.	-1.17 1.77	29852. 29581. -2.91
78	4.000	320.200	0.0	10.1 10.3	0.605 0.630	-0.888 0.211		0.0030 0.0030	0.9112-0.4120 0.9112-0.4120	-24.329 -24.329	0.188 0.188	32.170 32.170	3494. 3494.	-0.84 -0.84	29581. 29581. -3.79
79	7.800	315.300	0.0	6.4 10.5	-3.720 -1.267	-0.969 0.759									
80	11.200	310.500	0.0	9.3 3.4	0.700 3.291	1.330 0.308		-0.0957 0.8277	0.9009-0.4233 0.1490-0.5410	-25.166 -74.600	-6.066 79.794	35.414 21.631	3317. 3692.	-5.86 4.78	34551. 19016.-38.15
81	15.400	305.600	0.0	13.1 13.2	-3.559 -4.074	-0.826 -0.161									
82	19.300	300.700	0.0	3.5 5.1	2.642 -0.464	0.186 0.259		0.8277 -0.0224	0.1490-0.5410 0.8818-0.4710	-74.600 -28.109	79.794 -1.455	21.631 32.191	3545. 3482.	0.62 -1.17	19665.-36.04 30297. -1.46
83	23.000	295.900	0.0	3.2 4.4	0.675 0.456	0.272 -0.928									
84	26.900	291.000	0.0	3.2 4.4	-0.571 -0.055	0.273 -0.858		-0.0224 -0.0224	0.8818-0.4710 0.8818-0.4710	-28.109 -28.109	-1.455 -1.455	32.191 32.191	3545. 3535.	0.62 0.32	29265. 29945.-4.82
85	30.700	286.200	0.0	3.2 4.1	-1.575 0.641	-0.318 -0.730									
86	34.500	281.400	0.0	4.1 11.1	-0.065 3.514	-0.537 -0.450		-0.0108 0.1917	0.8562-0.5165 0.8943-0.4042	-31.098 -24.321	-0.720 12.101	34.605 36.058	3535. 3535.	0.32 0.32	32190. 33542. 4.69
87	38.300	276.600	0.0	7.3 11.4	-3.757 3.197	-0.370 0.332									
88	42.100	271.700	0.0	6.6 13.3	-0.357 3.300	1.307 0.420		-0.1136 0.0135	0.8302-0.5458 0.8815-0.4720	-33.323 -28.164	-7.789 0.877	27.214 34.579	3494. 3535.	-0.83 0.32	25024.-18.61 32167. 4.62
89	45.500	266.900	0.0	15.3 6.3	3.802 -2.723	-0.250 -0.680		-0.6010 -0.6788	0.6788-0.4219	-31.862 -41.524	20.235 20.235	3545. 3545.	0.62 0.62	18396.-40.17	

FRAME NO.	C.P. (DEG)	I.R. (DEG)	BALL TO POINT POS. NO. (IN.)	MEASURED COORDINATES		SPIN AXIS X (DEG)	SPIN AXIS Y (DEG)	SPIN AXIS Z (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	
				TANG 10.1	RAD 0.075	-0.417 -0.740	0.1336 0.8574-0.4970	-30.102 8.855	3535. 43.882	0.32 0.32	40820. 26819.	32.76 -12.78
90	49.800	262.000	0.0	16.3	3.666	-0.417						
				10.1	0.075	-0.740						
91	53.600	257.200	0.0	3.4	3.428	0.025						
				11.4	-3.329	0.090						
92	57.400	252.400	0.0	5.2	1.388	0.368						
				9.3	-0.693	1.320						
93	61.200	247.500	0.0	5.4	0.956	-0.292						
				7.2	3.595	-0.802						
94	65.000	242.600	0.0	3.2	0.865	0.170						
				30.1	3.660	-0.355						
95	68.900	237.800	0.0	3.2	-0.375	0.299						
				4.4	-0.070	-0.855						
96	72.200	233.000	0.0	4.4	-0.630	-1.046						
				6.4	3.423	-1.117						
97	76.400	228.200	0.0	3.5	-2.890	-0.369						
				2.4	-1.671	0.368						
98	80.200	223.300	0.0	2.2	-0.574	0.267						
				4.1	-0.643	-0.796						
AVG. SPEED (RPM)			AVG. ABS(SPEED ERROR) (PERCENT)		AVERAGE YAW (DEG.)	AVERAGE PITCH (DEG.)	MEAN BALL POSITION (DEG.)					
SEPARATOR	3523.66		1.3394									
BALL	30747.05		19.1033		0.108	-29.242	0.0					

ITI BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. 1-A-5 5-30-73

APP. - I-

	SHAFT RPM	BALL DIA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH								
	12000.	0.750	3	5.6350	2.8175	12.750	34.276								
FRAME NO.	O.R. (DEG)	I.R. (DEG)	BALL TO POINT SEP POS (IN.)	BALL NO.	MEASURED COORDINATES TANG RAD	SPIN AXIS X Y Z	DIRECTION PITCH (DEG)	SPIN AXIS YAW (DEG)	SPIN AXIS (DEG)	BALL ROTATION (DEG)	SEPARATCR (RPM)	BALL SPEED PERCENT	BALL SPEED PERCENT		
1	298.000	334.850	0.0	43.1	0.246 43.3	1.454 0.741 0.397									
2	302.200	329.400	0.0	43.3	0.138 43.5	0.656 0.680 0.345	0.0196 -0.0089	0.9898-0.1409 0.9811-0.1933	-8.099 -11.145	1.133 -0.520	38.197 35.868	5223. 5347.	-1.86 0.48	47500. 44602.	9.87 3.17
3	306.500	324.050	0.0	43.5	0.106 40.2	0.594 3.417 -0.403	0.0155 0.1398	0.9871-0.1592 0.9734-0.1815	-9.162 -10.564	0.899 8.170	74.776 27.871	5309. 5388.	-0.24 1.24	46980. 34128.-21.06	8.67
4	314.950	313.400	0.0	40.5	0.602 44.3	0.671 0.077									
5	319.350	308.000	0.0	31.2	3.583 40.5	0.203 0.108 0.787	0.0025 0.0461	0.9881-0.1536 0.9841-0.1718	-8.836 -9.901	0.145 2.682	39.622 36.231	5340. 5312.	0.35 -0.17	49787. 45289.	15.17 4.76
6	323.600	302.700	0.0	40.5	-0.790 44.3	0.457 0.0 1.108									
7	327.850	297.350	0.0	36.5	3.818 44.3	-0.824 -0.890 0.782									
8	336.300	286.650	0.0	43.3	1.109 42.3	-0.113 -0.550 1.248	-0.0175 0.0717	0.9864-0.1633 0.9699-0.2327	-9.401 -13.489	-1.016 4.230	70.535 31.175	5295. 5312.	-0.50 -0.17	44199. 38968.	2.24 -9.86
9	340.550	281.300	0.0	38.4	3.753 43.5	0.688 1.043 -0.137	-0.0183 -0.0183	0.9908-0.1340	-7.704 -1.060		37.196 5347.	0.48	46255.	6.99	

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES		SPIN AXIS X	AXIS DIRECTION Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	PERCENT ERROR	BALL SPEED PERCENT (RPM) ERRCR		
					TANG	RAD									BALL	SPEED PERCENT (RPM)	ERRCR
10	344.850	275.950	0.0	43.1	-0.981	1.172											
				43.5	0.701	0.354											
							0.1340	0.9820-0.1334		-7.735	7.769	28.825	5312.	-0.17	36031.	-16.65	
11	349.100	270.600	0.0	42.4	-2.988	-0.571											
				43.3	-0.585	0.420											
							0.0641	0.9700-0.2345		-13.590	3.781	34.070	5258.	-1.20	42149.	-2.50	
12	353.350	265.150	0.0	40.5	1.158	0.140											
				43.5	-0.525	0.360											
							-0.0698	0.9758-0.2071		-11.982	-4.090	32.955	5298.	-0.44	42070.	-2.69	
13	357.500	259.900	0.0	44.3	1.449	0.152											
				44.1	3.040	-0.179											
							-0.2082	0.9489-0.2370		-14.022	-12.376	22.726	5313.	-0.17	28407.	-34.29	
14	361.750	254.550	0.0	43.3	-0.883	-0.745											
				44.3	0.874	0.856											
							0.0233	0.9866-0.1615		-9.294	1.350	34.695	5285.	-0.69	43144.	-0.20	
15	6.000	249.150	0.0	40.5	-0.848	0.381											
				42.2	3.851	-0.722											
							-0.0741	0.9878-0.1367		-7.880	-4.288	37.015	5340.	0.35	46511.	7.59	
16	10.250	243.850	0.0	40.5	-1.162	-0.277											
				44.3	-0.945	0.720											
							0.0130	0.9956-0.0926		-5.313	0.746	34.806	5313.	-0.17	43507.	0.64	
17	14.500	238.500	0.0	36.6	4.056	-0.897											
				42.3	0.471	1.301											
							0.0401	0.9958-0.0818		-4.698	2.305	36.462	5305.	-0.31	46057.	6.54	
18	18.700	233.200	0.0	44.1	-2.963	-0.546											
				43.1	1.189	1.033											
							0.0274	0.9744-0.2231		-12.894	1.610	37.004	5320.	-0.04	45778.	5.89	
19	23.000	227.800	0.0	42.3	-1.455	0.462											
				43.3	0.678	0.411											
							0.1020	0.9842-0.1446		-8.359	5.914	30.817	5333.	0.22	39133.	-9.48	
20	27.200	222.550	0.0	42.2	-3.763	0.151											
				43.3	0.030	0.620											
							0.1906	0.9703-0.1491		-8.735	11.112	32.188	5223.	-1.86	40027.	-7.41	
21	31.400	217.100	0.0	36.5	-3.765	0.142											
				40.2	3.400	-0.210											
							-0.4611	0.8357-0.2984		-19.648	-28.890	28.009	5368.	0.88	35380.	-18.16	
22	35.650	211.850	0.0	43.3	-1.018	-0.188											
				43.6	0.353	1.404											
							0.0052	0.9799-0.1995		-11.509	0.304	31.882	5320.	-0.04	39442.	-8.76	
23	39.950	206.450	0.0	43.5	-0.931	-0.212											
				40.5	0.535	0.630											
							0.0026	0.9868-0.1617		-9.304	0.150	38.279	5312.	-0.17	47849.	10.68	
24	44.200	201.100	0.0	40.5	-0.202	0.737											
				44.3	0.794	0.860											
							0.0125	0.9784-0.2062		-11.901	0.731	32.423	5250.	-1.35	40528.	-6.25	
25	48.400	195.700	0.0	44.3	-0.092	1.029											
				42.2	3.849	-0.626											
							-0.0219	0.9911-0.1312		-7.539	-1.265	35.608	5340.	0.35	44743.	3.50	
26	52.650	190.400	0.0	30.4	-3.157	0.192											
				40.5	-1.208	-0.356											
							0.0363	0.9822-0.1845		-10.638	2.117	71.725	5242.	-1.49	45300.	4.79	
27	60.950	179.700	0.0	42.3	-0.694	1.127											
				43.3	1.081	-0.126											
							-0.0312	0.9807-0.1930		-11.134	-1.820	35.775	5409.	1.65	44487.	2.90	
28	65.300	174.400	0.0	43.5	1.009	-0.145											
				39.3	3.965	-0.660											
							0.0397	0.9845-0.1707		-9.834	2.307	74.689	5313.	-0.17	46681.	7.98	
29	73.800	163.700	0.0	43.3	-0.641	0.313											
				43.6	1.362	0.828											
							-0.0115	0.9812-0.1925		-11.098	-0.669	33.509	5250.	-1.35	41886.	-3.11	

FRAME NO.	U.R. (DEG)	I.R. (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES NO. TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	BALL PERCENT ERRCR		
					X	Y	Z								
30	78.000	158.300	0.0	43.5 40.5	-0.592 1.114	0.242 0.140		0.0445	0.9838-0.1739	-10.027	2.589	42.789	5347.	0.48	53209. 23.08
31	82.300	152.950	0.0	43.6 44.3	-0.801 1.435	1.177 0.151		0.0073	0.9816-0.1909	-11.004	0.424	35.380	5277.	-0.83	44456. 2.83
32	86.500	147.600	0.0	43.5 40.5	-0.831 -0.273	-0.893 0.653		0.0508	0.9843-0.1688	-9.733	2.955	36.496	5347.	0.48	45384. 4.98
33	90.800	142.250	0.0	40.4 40.5	-1.198 -0.879	1.006 0.245		0.0508	0.9843-0.1688	-9.733	2.955	36.496	5285.	-0.69	45384. 4.98
34	95.050	136.850	0.0	30.3 42.3	-3.690 1.332	-0.162 0.793		0.0873	0.9782-0.1882	-10.891	5.100	34.356	5368.	0.88	43397. 0.38
35	99.300	131.600	0.0	29.1 44.3	-3.988 -1.391	-0.166 -0.253		0.0213	0.9747-0.2226	-12.867	1.251	73.972	5330.	0.15	46113. 6.67
36	107.850	126.900	0.0	43.3 39.3	0.641 3.997	0.396 -0.497		0.0864	0.9857-0.1450	-8.368	5.012	39.685	5312.	-0.17	49606. 14.75
37	112.100	115.550	0.0	42.2 43.3	-3.767 0.0	-0.225 0.550		0.1193	0.9807-0.1546	-8.960	6.938	33.542	5277.	-0.83	42147. -2.51
38	116.300	110.200	0.0	36.5 43.5	-3.756 0.018	-0.223 0.480		0.0757	0.9700-0.2309	-13.390	4.460	36.409	5375.	1.00	45511. 5.27
39	120.600	104.900	0.0	43.6 43.3	0.299 -0.969	1.365 -0.334		0.0947	0.9945-0.0449	-2.584	5.437	28.448	5285.	-0.69	35375.-18.17
40	124.850	99.500	0.0	38.4 40.5	-3.590 0.506	0.518 0.608		0.0548	0.9599-0.2748	-15.978	3.270	36.042	5305.	-0.31	45527. 5.31
41	129.050	94.200	0.0	40.4 44.3	-0.134 0.752	1.481 0.840		0.0101	0.9646-0.2637	-15.291	0.603	34.520	5320.	-0.04	42705. -1.22
42	133.350	88.800	0.0	44.3 42.3	-0.142 1.792	0.969 -0.162		0.0374	0.9882-0.1486	-8.553	2.165	39.372	5340.	0.35	49473. 14.44
43	137.600	83.500	0.0	30.3 40.5	-3.663 -1.138	-0.312 -0.474		0.0741	0.9805-0.1818	-10.503	4.321	36.309	5320.	-0.04	44919. 3.90
44	141.900	78.100	0.0	29.3 42.3	-3.583 0.283	0.346 1.283		0.0529	0.9747-0.2172	-12.565	3.105	36.733	5270.	-0.97	46645. 7.90
45	146.050	72.800	0.0	42.3 43.3	-0.724 1.144	1.018 -0.065		-0.0140	0.9783-0.2068	-11.936	-0.821	37.803	5320.	-0.04	46766. 8.18
46	150.350	67.400	0.0	43.1 43.5	-0.083 1.048	1.380 -0.099		0.0310	0.9849-0.1703	-9.811	1.801	76.922	5364.	0.80	47704. 10.35
47	159.000	56.700	0.0	43.3 43.5	-0.650 -0.082	0.261 0.516		0.0700	0.9705-0.2309	-13.381	4.128	28.782	5375.	1.00	35978.-16.78
48	163.300	51.400	0.0	43.5 40.5	-0.575 1.122	0.214 0.230		0.0483	0.9842-0.1701	-9.804	2.812	42.557	5250.	-1.35	53196. 23.05
49	167.500	46.000	0.0	43.6 44.3	-0.878 1.448	1.123 0.276		0.0134	0.9825-0.1860	-10.721	0.782	36.044	5375.	1.00	45055. 4.22

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	NO. MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	PERCENT ERROR	BALL SPEED (RPM)	BALL PERCENT ERRCR
					X	Y	Z							
50	171.800	40.700	0.0	43.5 40.5	-0.738 -0.313	-0.940 0.672		0.0217 0.9992-0.0347	-1.990	1.243	28.343	5292.	-0.55	34884.-19.31
51	176.100	35.250	0.0	40.1 40.5	-3.199 -0.883	0.424 0.199		0.0694 0.9690-0.2372	-13.756	4.097	34.109	5333.	0.22	43314. 0.19
52	180.300	30.000	0.0	30.4 44.3	-3.102 -1.013	-0.201 0.515		0.1044 0.9868-0.1240	-7.160	6.038	33.101	5403.	1.53	41593. -3.79
53	184.600	24.750	0.0	29.1 43.5	-3.946 0.828	-0.489 -1.137		0.0477 0.9792-0.1970	-11.376	2.786	33.451	5312.	-0.17	41814. -3.28
54	188.850	19.400	0.0	43.3 43.4	1.063 2.643	0.112 -0.202		0.0776 0.9856-0.1499	-8.648	4.503	41.423	5313.	-0.17	51779. 19.77
55	193.100	14.050	0.0	42.1 43.3	-2.647 0.610	-0.172 0.517		0.1717 0.9826-0.0711	-4.138	9.912	29.961	5381.	1.12	37065.-14.26
56	197.450	8.700	0.0	42.2 43.1	-3.708 -1.225	-0.501 0.850		0.2068 0.9715-0.1163	-6.826	12.017	32.403	5305.	-0.31	40930. -5.32
57	201.650	3.400	0.0	36.5 43.3	-3.716 -0.712	-0.525 0.255		0.1105 0.9708-0.2128	-12.364	6.494	34.345	5312.	-0.17	42931. -0.69
58	205.900	358.050	0.0	43.3 40.5	-0.969 1.067	-0.338 0.384		0.4419 0.8791 0.1787	11.488	26.686	13.684	5409.	1.65	17017.-60.64
59	210.250	352.750	0.0	38.4 43.5	-3.650 -0.910	0.229 -0.343		-0.1983 0.9437-0.2648	-15.674	-11.866	50.590	5312.	-0.17	63236. 46.28
60	214.500	347.400	0.0	40.5 44.3	-0.300 0.613	0.710 1.015		0.0190 0.9833-0.1810	-10.429	1.107	34.797	5375.	1.00	43496. 0.61
61	218.800	342.100	0.0	40.5 44.3	-1.001 -0.340	0.126 1.038		-0.0002 0.9939-0.1100	-6.315	-0.014	35.850	5305.	-0.31	45284. 4.75
62	223.000	336.800	0.0	30.3 40.5	-3.682 -1.156	-0.585 -0.479		0.1215 0.9806-0.1540	-8.924	7.063	34.635	5347.	0.48	43071. -0.37
63	227.300	331.450	0.0	29.3 44.3	-3.632 -1.408	0.083 -0.401		0.0076 0.9767-0.2146	-12.395	0.444	37.105	5381.	1.12	45903. 6.18
64	231.650	326.100	0.0	31.2 43.3	-3.396 1.039	0.458 0.106		-0.0719 0.9700-0.2324	-13.475	-4.241	35.930	5305.	-0.31	45386. 4.98
65	235.850	320.800	0.0	43.1 43.5	-0.281 0.980	1.453 -0.075		0.0279 0.9857-0.1664	-9.582	1.618	36.030	5375.	1.00	45039. 4.18
66	240.150	315.500	0.0	43.3 40.1	-0.176 3.466	0.636 -0.850		-0.0161 0.9889-0.1478	-8.498	-0.934	33.683	5354.	0.60	41455. -4.11
67	244.500	310.100	0.0	43.5 40.5	-0.167 1.308	0.565 -0.271		0.0163 0.9874-0.1571	-9.040	0.944	36.768	5333.	0.22	46689. 8.00
68	248.700	304.850	0.0	43.5 40.5	-0.663 1.033	0.245 0.437		0.0639 0.9884-0.1377	-7.932	3.698	36.083	5285.	-0.69	44871. 3.79
69	252.950	299.450	0.0	43.6 44.3	-1.055 1.330	1.058 0.520		0.0410 0.9840-0.1734	-9.995	2.384	31.271	5375.	1.00	39088. -9.58

FRAME NU.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL SEP (IN.)	TO POINT POS NO.	MEASURED COORDINATES TANG RAD		SPIN AXIS X	DIRECTION Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (RPM)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	SEPARATOR PERCENT ERROR	BALL PERCENT ERROR
					39.3 40.5	-3.854 -0.428	-0.653 0.709									
70	257.250	294.150	0.0	39.3 40.5	-3.854 -0.428	-0.653 0.709										
71	261.550	288.800	0.0	40.1 40.5	-3.306 -0.995	0.201 0.210	0.0699 0.7742-0.1035		-5.957	4.027	37.487	5347.	0.48	46616.	7.83	
72	265.850	283.500	0.0	44.3 43.1	-1.186 0.957	0.484 -1.021	0.4229 0.4336-0.3326		-31.319	28.644	20.808	5375.	1.01	26010.-39.83		
73	270.050	278.150	0.0	43.5 44.1	0.857 -2.831	-0.991 0.530	0.8375 0.4336-0.3326		-37.489	62.627	11.177	5277.	-0.83	14044.-67.51		
74	274.350	272.850	0.0	42.3 43.3	-1.073 0.914	1.011 0.242	0.1084 0.9687-0.2234		-12.989	6.387	32.799	5375.	1.00	40998.-5.17		
75	278.600	267.500	0.0	42.1 43.3	-2.749 0.404	-0.390 0.628	0.0203 0.9861-0.1650		-9.499	1.177	35.458	5313.	-0.17	44324. 2.53		
76	282.900	262.200	0.0	42.2 43.5	-3.757 0.351	-0.865 0.557	0.0973 0.9911-0.0906		-5.221	5.609	32.329	5375.	1.00	40411.-6.52		
77	287.100	256.800	0.0	43.3 43.6	-0.855 0.941	0.218 1.257	0.0247 0.9769-0.2122		-12.254	1.451	38.515	5250.	-1.35	48144. 11.36		
78	291.350	251.500	0.0	43.3 43.5	-1.056 -0.820	-0.400 0.178	-0.0346 0.9873-0.1551		-8.927	-2.008	37.304	5340.	0.35	46875. 8.43		
79	295.550	246.150	0.0	38.4 43.5	-3.756 -0.985	-0.127 -0.428	0.1262 0.9915 0.0325		1.877	7.254	23.120	5277.	-0.83	29052.-32.80		
80	299.850	240.800	0.0	44.3 42.1	0.426 2.844	1.064 -0.191	0.0174 0.9700-0.2427		-14.046	1.030	38.077	5347.	0.48	47350. 9.53		
81	304.100	235.450	0.0	40.1 40.5	-3.394 -1.085	0.0 0.077	0.0516 0.9879-0.1463		-8.421	2.991	36.679	5313.	-0.17	45849. 6.06		
82	312.600	224.900	0.0	29.3 42.3	-3.673 -0.120	-0.278 1.400	0.0251 0.9865-0.1619		-9.319	1.458	72.651	5354.	0.61	45764. 5.86		
83	316.850	219.550	0.0	31.2 43.5	-3.511 1.063	-0.161 -0.376	0.0437 0.9794-0.1970		-11.370	2.552	40.356	5312.	-0.17	50445. 16.69		
84	321.000	214.200	0.0	43.1 43.3	-0.528 0.322	1.417 0.615	-0.1155 0.9611-0.2510		-14.638	-6.851	33.435	5242.	-1.49	42233.-2.31		

Avg. SEPARATOR BALL	SPEED (RPM) 5321.63 43230.98	Avg. ABS(SPEED BALL ERROR) (PERCENT) 0.6361 10.2773	AVERAGE YAW (DEG.) 3.025	AVERAGE PITCH (DEG.) -10.339	MEAN BALL POSITION (DEG.) 0.0
------------------------	---------------------------------------	--	--------------------------------	------------------------------------	-------------------------------------

ITI BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. I-A-6 5-5-73

APP. -1-

	SHAFT RPM	BALL C.R. CTA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH			
FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS NO.	MEASURED COORDINATES TANG RAD	SPIN AXIS X Y Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)
	12000.	0.750	3	5.6350	2.8175	12.750	34.276			
1	149.400	13.650	0.0	36.5 0.916 -0.068 42.2 2.989 0.164	0.0316 0.9308-0.3640	-21.360	1.942	33.910	5198. -1.34	43521.-37.85
2	153.450	68.350	0.0	42.4 0.044 1.472 36.5 -0.050 0.271	0.0316 0.9308-0.3640	-21.360	1.942	33.910	5326. 1.09	43521.-37.85
3	157.600	63.150	0.0	43.1 -3.046 0.536 36.1 1.297 -0.608	-0.4956 0.8488 0.1840	12.228	-30.279	162.287	5270. 0.02	206078.194.31
4	161.750	57.850	0.0	42.4 -2.563 -0.270 36.3 -0.221 -0.764	-0.4222 0.8921-0.1608	-10.220	-25.325	18.469	5242. -0.50	23329.-66.68
5	165.900	52.500	0.0	42.2 -2.997 -0.152 36.3 -0.553 -0.035	-0.7567 0.6507-0.0641	-5.627	-49.308	122.625	5234. -0.66	156543.123.56
6	170.000	47.200	0.0	42.2 -3.925 -0.770 35.2 0.779 1.715	-0.0030 0.9904-0.1382	-7.944	-0.174	50.968	5538. 5.12	62730.-10.41
7	174.500	41.950	0.0	35.2 -1.100 1.568 36.2 1.351 0.294	-0.0236 0.9343-0.3557	-20.841	-1.447	37.941	4984. -5.41	49759.-28.94
8	178.300	36.600	0.0	35.2 -2.565 0.422 36.2 0.224 0.751	-0.0094 0.9434-0.3315	-19.362	-0.570	35.199	5020. -4.71	43101.-38.45
9	182.400	30.900	0.0	35.3 -2.797 -0.292 36.2 -1.045 0.451	0.0606 0.9215-0.3836	-22.601	3.764	35.342	5497. 4.34	47386.-32.33

FRAME NO.	C.R. POSITION (DEG)	I.P. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	MEASURFD COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED PERCENT	BALL SPEED PERCENT (RPM)
					X	Y	Z					
10	186.500	26.050	0.0	36.4 42.4	-1.077 2.806	0.248 -0.618		-0.0125	0.9398-0.3414	-19.962	-0.763	32.692
11	190.700	20.850	0.0	38.1 36.6	-3.576 -1.442	0.176 0.570		-0.9336	0.2335 0.2716	49.314	-75.957	58.733
12	194.300	15.500	0.0	38.2 36.3	-3.769 0.730	-0.372 -1.019		-0.7418	0.4783-0.4701	-44.507	-57.186	98.065
13	198.900	10.350	0.0	43.4 36.5	-3.939 -0.718	-0.042 0.064		0.2882	0.9056-0.3111	-18.956	17.651	30.626
14	203.000	5.000	0.0	43.1 36.5	-3.457 -1.389	-0.657 -0.630		0.0355	0.8923-0.4501	-26.770	2.279	36.454
15	207.200	359.800	0.0	42.2 34.2	-2.766 0.111	0.362 1.433		0.0245	0.9401-0.3402	-19.892	1.490	36.804
16	211.300	354.650	0.0	32.2 37.2	-3.880 3.763	-0.073 0.061		0.1417	0.8868-0.4399	-26.383	9.080	34.559
17	215.450	349.250	0.0	38.1 34.2	-3.758 -2.532	-0.066 -0.311		-0.0408	0.9328-0.3581	-21.001	-2.507	31.860
18	219.650	344.100	0.0	35.1 36.2	-2.937 0.524	-0.647 0.732		0.0631	0.9271-0.3695	-21.731	3.895	34.415
19	223.800	338.750	0.0	35.2 36.4	-2.896 0.386	-0.669 0.592		-0.0435	0.9607-0.2742	-15.931	-2.593	39.533
20	227.950	333.600	0.0	37.2 36.2	-3.149 -1.702	0.394 -0.032		0.2188	0.9021-0.3718	-22.400	13.635	30.144
21	232.050	328.200	0.0	37.4 36.4	-3.631 -1.614	-0.291 -0.382		0.0663	0.9175-0.3922	-23.144	4.136	69.808
22	240.200	317.700	0.0	36.5 34.2	-0.417 2.740	-0.226 -0.710		0.2653	0.9102-0.3180	-19.255	16.251	21.076
23	244.300	312.500	0.0	43.1 35.1	-3.353 2.870	-0.037 0.038		-0.6941	0.7059 0.1407	11.275	-44.518	166.123
24	248.600	307.150	0.0	42.3 36.3	-4.048 -0.390	-0.416 -0.796		-0.7263	0.6766-0.1211	-10.146	-47.031	50.145
25	252.650	301.850	0.0	34.1 36.3	-1.026 -0.639	1.253 -1.148		-0.3256	0.4289-0.8426	-63.024	-37.204	29.651
26	256.900	296.550	0.0	35.3 38.1	0.887 3.822	1.660 -0.655		-0.0557	0.9654-0.2547	-14.779	-3.301	36.147
27	260.950	291.300	0.0	34.1 35.1	-3.692 -2.807	-0.622 -0.105		0.0825	0.9043-0.4189	-24.854	5.210	33.852
28	265.200	286.000	0.0	35.2 36.4	-2.798 0.733	-0.126 0.548		0.0147	0.9269-0.3750	-22.028	0.910	39.273
29	269.350	280.800	0.0	36.4 36.6	-0.486 0.717	0.578 1.057		0.0938	0.9355-0.3407	-20.013	5.729	30.774

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS X	DIRECTION Y	SPIN AXIS Z	PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR (RPM)	BALL SPEED PERCENT	SPEED (RPM)	PERCENT ERROR
30	273.450	275.350	0.0	37.3 -3.864 -0.108 37.2 -3.516 -0.937	0.0938	0.9355-0.3407	-20.013	5.729	30.774	5254.	-0.28	39923.	-42.98	
31	277.500	270.150	0.0	38.1 -3.725 -0.603 36.5 0.810 0.106	-0.4631	0.8139-0.3509	-23.320	-29.637	140.283	5319.	0.95	181994.	159.91	
32	281.600	265.000	0.0	26.3 0.603 -0.850 34.1 -3.785 -1.332	0.1809	0.4875-0.8542	-60.286	20.364	119.592	5234.	-0.66	152668.	118.03	
33	285.700	259.700	0.0	43.3 -3.897 0.669 36.5 -1.029 -0.163	0.1701	0.8872-0.4289	-25.799	10.855	33.483	5290.	0.41	43205.	-38.30	
34	289.800	254.500	0.0	42.4 -2.628 -0.394 34.2 0.989 1.279	0.0240	0.9377-0.3467	-20.290	1.468	35.372	5234.	-0.66	45156.	-35.51	
35	293.900	249.200	0.0	42.2 -3.063 -0.320 35.3 2.731 0.245	0.0436	0.9420-0.3327	-19.450	2.652	69.297	5284.	0.29	46115.	-37.00	
36	302.200	238.650	0.0	34.1 -3.595 0.088 38.2 3.857 -0.087	-0.1407	0.8570-0.4957	-30.048	-9.322	23.607	5368.	1.89	29819.	-57.41	
37	306.450	233.400	0.0	36.2 0.068 0.827 36.4 0.993 0.396	0.0267	0.9373-0.3475	-20.341	1.631	38.676	5189.	-1.51	50175.	-28.34	
38	310.450	228.150	0.0	36.2 -1.219 0.348 36.4 -0.089 0.601	0.0404	0.9490-0.3128	-18.241	2.441	34.724	5270.	0.02	44094.	-37.03	
39	314.600	222.850	0.0	37.2 -3.404 -0.375 36.6 -0.278 1.092	0.0793	0.9215-0.3803	-22.425	4.920	33.991	5262.	-0.13	43624.	-37.70	
40	318.700	217.600	0.0	38.1 -3.600 0.075 36.5 1.068 -0.110	0.0165	0.9127-0.4084	-24.108	1.035	70.387	5270.	0.02	44690.	-36.18	
41	321.000	207.000	0.0	34.1 3.657 0.148 42.2 0.230 2.041	-0.0476	0.8317 0.5532	33.633	-3.274	23.523	5319.	0.95	30517.	-56.42	
42	331.100	201.850	0.0	36.3 -0.189 -0.711 35.2 3.079 -1.084	-0.6433	0.6199-0.4494	-35.940	-46.063	21.007	5277.	0.17	26396.	-62.30	
43	335.300	196.500	0.0	42.2 -2.910 0.201 34.2 -0.135 1.382	0.0023	0.9040-0.4275	-25.306	0.144	40.239	5254.	-0.28	52202.	-25.45	
44	339.350	191.300	0.0	37.4 3.803 -0.822 37.3 3.950 0.099	0.0023	0.9040-0.4275	-25.306	0.144	40.239	5242.	-0.50	50828.	-27.41	
45	343.500	185.950	0.0	34.1 -3.370 0.565 35.2 -0.764 1.681	0.0250	0.8531-0.5211	-31.419	1.678	28.789	5254.	-0.28	37348.	-46.66	
46	347.550	180.750	0.0	36.2 0.464 0.696 36.4 1.322 0.129	-0.0172	0.9566-0.2909	-16.912	-1.030	37.211	5312.	0.83	46513.	-33.57	
47	351.800	175.400	0.0	35.3 -2.691 0.069 36.2 -0.815 0.570	0.0773	0.9401-0.3321	-19.458	4.699	33.744	5189.	-1.51	43776.	-37.48	
48	355.800	170.150	0.0	37.2 -3.203 0.193 36.4 -0.865 0.371	-0.0096	0.9399-0.3412	-19.951	-0.584	35.560	5290.	0.41	45883.	-34.47	
49	359.900	164.950	0.0	37.3 -3.883 -1.038 37.4 -3.704 -0.535	-0.0096	0.9399-0.3412	-19.951	-0.584	35.560	5170.	-1.87	45395.	-35.17	

FRAME NO.	O.R. (DEG)	I.P. (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION X Y Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	SPIN AXIS ROTATION (DEG)	BALL SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED (RPM)	BALL PERCENT
50	3.950	159.600	0.0	38.2 -3.742 36.5 0.435	-0.428 0.201							
51	8.150	154.450	0.0	43.4 -3.890 36.3 0.445	0.445 -0.775	-0.7575 0.6012 0.2546	22.949	-51.564	108.115	5390.	2.31	138758. 98.17
52	12.200	149.150	0.0	43.1 -3.309 36.5 -1.280	-0.267 -0.487	-0.6041 0.7496-0.2706	-19.846	-38.866	147.958	5198.	-1.34	189893.171.19
53	16.350	143.900	0.0	42.3 -4.011 36.1 0.619	-0.682 -0.328	0.0107 0.9219-0.3874	-22.791	0.664	36.036	5298.	0.55	46003.-34.30
54	20.350	138.500	0.0	32.2 -3.767 34.2 -1.143	-0.387 1.094	-0.2163 0.8785-0.4259	-25.861	-13.834	60.903	5106.	-3.08	77748. 11.04
55	24.500	133.300	0.0	35.2 -2.902 36.2 -0.813	-0.195 -0.504	0.1946 0.7606-0.6193	-39.153	14.347	74.806	5326.	1.09	96007. 37.11
56	28.650	128.000	0.0	34.1 -3.675 35.1 -2.757	-0.796 -0.326	0.4521 0.5691-0.6868	-50.357	38.466	23.852	5270.	0.02	30288.-56.74
57	32.700	122.850	0.0	36.2 -0.428 36.4 0.611	0.657 0.522	0.0012 0.8598-0.5105	-30.700	0.082	32.990	5283.	0.26	43030.-38.55
58	36.900	117.450	0.0	36.2 -1.502 36.6 0.573	0.073 1.045	-0.0025 0.9408-0.3389	-19.813	-0.153	37.338	5250.	-0.36	46673.-33.34
59	41.000	112.250	0.0	37.4 -3.548 36.4 -1.457	0.147 -0.172	0.0728 0.9391-0.3358	-19.678	4.430	30.475	5290.	0.41	39323.-43.84
60	45.000	106.950	0.0	38.2 -3.590 32.2 3.976	0.243 0.143	0.2112 0.9004-0.3803	-22.900	13.202	32.194	5161.	-2.04	41541.-40.67
61	49.150	101.850	0.0	36.5 -0.245 36.3 0.523	0.218 -0.857	0.0145 0.9920 0.1257	7.223	0.835	123.127	5384.	2.18	159732.128.12
62	53.300	96.400	0.0	43.1 -3.223 36.5 -1.110	0.331 -0.288	-0.3637 0.8726 0.3260	20.484	-22.623	140.491	5187.	-1.54	175614.150.80
63	57.350	91.200	0.0	42.2 -2.692 36.3 -0.303	-0.645 -0.817	-0.5057 0.8611-0.0526	-3.492	-30.426	98.783	5254.	-0.28	128152. 83.02
64	61.500	85.950	0.0	42.2 -3.108 34.2 -0.710	-0.519 -1.245	-0.6020 0.7775-0.1820	-13.175	-37.749	177.432	5298.	0.55	226508.223.48
65	65.650	80.650	0.0	32.2 -3.932 35.1 -1.352	-1.266 1.365	-0.5247 0.7644-0.3748	-26.120	-34.466	61.520	5270.	0.02	78120. 11.57
66	69.750	75.450	0.0	34.1 -3.606 35.1 -2.668	-0.186 0.190	-0.0051 0.9370-0.3492	-20.440	-0.310	37.870	5290.	0.41	48864.-30.21
67	73.700	70.150	0.0	35.2 -2.633 36.2 -0.084	0.146 0.743	0.0303 0.9040-0.4264	-25.249	1.916	35.881	5124.	-2.74	46548.-33.52
68	77.950	64.850	0.0	35.3 -2.845 36.4 -0.182	-0.583 0.556	0.0754 0.9205-0.3835	-22.617	4.686	32.031	5340.	1.36	40249.-42.52
69	82.000	59.500	0.0	37.3 -4.100 36.4 -1.203	-0.084 0.106	-0.1369 0.8700-0.4736	-28.564	-8.944	53.528	5170.	-1.87	68333. -2.41
						-0.0997 0.9794-0.1756	-10.167	-5.811	28.194	5326.	1.09	36185.-48.32

FRAME NO.	O.R. (DEG)	I.R. (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	BALL PERCENT ERROR
					X	Y	Z						
70	86.150	54.300	0.0	37.4 -3.645 -1.348 42.2 3.084 0.0	-0.9793	0.1059	0.1723	58.436	-83.830	60.060	5262.	-0.13	77083. 10.08
71	90.250	49.050	0.0	38.2 -3.709 -1.282 36.3 -0.688 -0.950	-0.8151	0.2547	-0.5203	-63.915	-72.645	82.440	5326.	1.09	105806. 51.11
72	94.400	43.850	0.0	43.4 -4.000 -0.490 36.5 -0.872 -0.083	0.1202	0.9459	-0.3012	-17.664	7.239	33.948	5254.	-0.28	44040.-37.10
73	98.450	38.650	0.0	43.1 -3.483 -1.074 42.4 -2.542 -0.144	0.3307	0.8814	-0.3373	-20.939	20.568	29.148	5277.	0.17	36626.-47.69
74	102.650	33.300	0.0	42.2 -2.905 0.060 35.3 2.889 -0.176	0.2816	0.9054	-0.3176	-19.329	17.275	28.498	5198.	-1.34	36575.-47.77
75	106.700	28.000	0.0	32.2 -3.928 -0.497 37.2 3.268 0.323	-0.2616	0.8420	-0.4718	-29.261	-17.260	27.583	5326.	1.09	35400.-49.44
76	110.850	22.800	0.0	35.2 -0.809 1.640 34.2 -2.549 -0.528	0.0396	0.9450	-0.3247	-18.961	2.397	32.954	5270.	0.02	41847.-40.24
77	115.000	17.500	0.0	35.1 -2.842 -0.945 36.2 0.326 0.726	0.0454	0.9079	-0.4168	-24.658	2.865	36.978	5368.	1.89	46709.-33.29
78	119.250	12.250	0.0	35.2 -2.910 -0.992 35.3 -2.689 -0.118	0.0454	0.9079	-0.4168	-24.658	2.865	36.978	5124.	-2.74	47971.-31.49
79	123.200	6.950	0.0	37.2 -3.298 0.111 36.6 0.058 1.102	-0.0757	0.9496	-0.3041	-17.755	-4.560	39.207	5290.	0.41	50590.-27.75
80	127.300	1.750	0.0	37.4 -3.675 -0.676 38.1 -3.452 0.498	-0.0757	0.9496	-0.3041	-17.755	-4.560	39.207	5270.	0.02	49786.-28.90
81	131.450	356.450	0.0	38.2 -3.751 -0.586 42.4 0.679 1.423	-0.1596	0.9696	0.1856	10.836	-9.348	173.428	5298.	0.55	221397.216.19
82	135.600	351.200	0.0	36.5 -0.669 -0.064 36.3 0.386 -0.780	-0.5033	0.8422	0.1932	12.921	-30.863	146.308	5270.	0.02	185787.165.33
83	139.750	345.900	0.0	43.1 -3.444 -0.435 36.5 -1.351 -0.704	0.2652	0.8561	-0.4435	-27.385	17.212	31.511	5326.	1.09	40443.-42.24
84	143.900	340.700	0.0	42.2 -2.759 0.489 35.3 2.998 -0.703	-0.0820	0.8892	-0.4502	-26.854	-5.272	31.358	5242.	-0.51	39610.-43.43
85	148.050	335.350	0.0	37.2 3.471 -0.261 37.3 3.972 -0.636	-0.0820	0.8892	-0.4502	-26.854	-5.272	31.358	5262.	-0.13	40246.-42.52
86	152.150	330.100	0.0	35.3 0.638 1.683 38.1 3.809 -0.360	0.0491	0.9280	-0.3692	-21.694	3.031	33.089	5362.	1.77	42241.-39.67
87	156.350	324.900	0.0	35.1 -2.852 -0.467 36.4 1.557 -0.090	-0.0866	0.9165	-0.3906	-23.083	-5.400	42.117	5215.	-1.02	52923.-24.42
88	160.500	319.500	0.0	35.2 -2.858 -0.482 36.2 -0.546 0.671	0.0928	0.9328	-0.3483	-20.473	5.679	33.860	5348.	1.50	44165.-36.93
89	164.600	314.400	0.0	37.2 -3.011 0.582 36.4 -0.614 0.472	0.1372	0.9157	-0.3778	-22.420	8.519	31.221	5198.	-1.35	40069.-42.78

FRAME NO.	C.R. (DEG)	I.P. (DEG)	BALL TO POINT SEP POS	BALL POSITION (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR (RPM)	BALL SPEED PERCENT (RPM)					
						X	Y	Z								
90	168.650	309.100	0.0	37.3 36.6	-3.881 -0.900	-0.504 0.880										
91	172.750	303.900	0.0	32.2 36.5	3.910 0.678	0.328 0.165	0.0553 -0.0193	0.8913-0.4501 0.9378-0.3468	-26.796 -20.296	3.550 -1.121	35.416 35.350	5290. 5305.	0.41 0.69	45699.-34.74 44652.-36.23		
92	176.550	298.600	0.0	34.1 42.2	3.792 1.135	-1.024 1.947		0.0429 0.9477-0.3163	-18.455 2.591		35.085 35.226		-0.81	45271.-35.35		
93	181.000	293.350	0.0	36.5 35.1	-1.111 2.937	-0.317 -0.213		-0.6704 -0.5681	0.7282 0.7300	0.1426 0.3800	11.081 27.502	-42.632 -37.891	165.297 165.368	5305. 5290.	0.69 0.41	208795.198.19 213380.204.74
94	185.200	288.050	0.0	42.3 36.3	-4.033 -0.418	-0.110 -0.790										
95	189.300	282.850	0.0	42.2 37.2	-3.131 -3.551	-0.660 -0.857		0.0373 0.9887-0.1451			2.163 161.437		5206. 5206.	-1.18 -1.18	205003.192.77 205003.192.77	
96	193.400	277.500	0.0	38.1 37.4	3.851 3.657	-1.034 1.660										
AVERAGE SPEED (RPM)		AVERAGE ABS(SPEED ERROR) (PERCENT)		AVERAGE YAW (DEG.)		AVERAGE PITCH (DEG.)		MEAN BALL POSITION (DEG.)								
SEPARATOR	5268.71		1.2591													
BALL	70021.25		57.9802				-7.514		-17.508		0.0					

P-1246

CR-134528

A P P E N D I X 2

Ball Motion Printout for Tests

IB-1 through IB-4

Preceding page blank



INDUSTRIAL TECTONICS, INC., RESEARCH AND DEVELOPMENT DIVISION

ITI BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. 1-B-1

2-23-73

APP -2-

SHAFT RPM	BALL DIA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FLM MAGNIFICATION	OBJECT LENGTH
4000.	0.750	3	5.6360	2.8175	12.750	34.276

IHC2511 SORT NEGATIVE ARGUMENT=-0.4660246E .04

TRACEBACK ROUTINE CALLED FROM ISN REG. 14 REG. 15 REG. 0 REG. 1
 SORT 0008 6205A408 00062E80 00058110 0005A304
 CNVRT 62059088 0005A290 00058110 000562DC
 MAIN 00015354 01055E48 F0000008 0008E7F8

ENTRY POINT= 01055E48

STANDARD FIXUP TAKEN , EXECUTION CONTINUING

IHC2081 IBCOM - PROGRAM INTERRUPT (P) - UNDERFLOW OLD PSW IS FF75000092059C1C . REGISTER CONTAINED FB10AA4530000000

TRACEBACK ROUTINE CALLED FROM ISN REG. 14 REG. 15 REG. 0 REG. 1
 CRSPDT 0005 6205A6B2 00059818 00056468 0005A53C
 RELAV 62059194 0005A4C8 00056468 000562F0
 MAIN 00015354 01055E48 F0000008 0008E7F8

ENTRY POINT= 01055E48

STANDARD FIXUP TAKEN , EXECUTION CONTINUING

IHC2081 IBCOM - PROGRAM INTERRUPT (P) - UNDRFLW OLD PSW IS FF750000A2059C30 . REGISTER CONTAINED 7A10E56040000000

TRACEBACK ROUTINE CALLED FROM ISN REG. 14 REG. 15 REG. 0 REG. 1
 CRSPDT 0005 6205A6B2 00059818 00056468 0005A53C
 RELAV 62059194 0005A4C8 00056468 000562F0
 MAIN 00015354 01055E48 F0000008 0008E7F8

ENTRY POINT= 01055E48

STANDARD FIXUP TAKEN , EXECUTION CONTINUING

IHC2081 IBCOM - PROGRAM INTERRUPT (P) - UNDERFLOW OLD PSW IS FF75000062059FC4 . REGISTER CONTAINED 60600B1683040400

TRACEBACK ROUTINE CALLED FROM ISN REG. 14 REG. 15 REG. 0 REG. 1
 VMAG 0006 6205A6C0 00059F08 00056468 0005A548
 RELAV 62059194 0005A4C8 00056468 000562F0
 MAIN 00015354 01055E48 F0000008 0008E7F8

ENTRY POINT= 01055E48

STANDARD FIXUP TAKEN , EXECUTION CONTINUING

THC251I SORT NEGATIVE ARGUMENT=-0.590295BF 21

TRACEBACK	ROUTINE CALLED FROM ISN	REG. 14	REG. 15	REG. 0	REG. 1
SORT	0008	5205A408	00062F80	00058110	0005A304
CNVRT		62059088	0005A290	00058110	000562DC
MAIN		00015354	01055E48	FD000008	0008E7FB

ENTRY POINT= 01055E48

STANDARD FIXUP TAKEN , EXECUTION CONTINUING

FRAME NO.	D.R. (DEG)	I.R. (IN.)	BALL TO POINT SEP POS NO.	MEASURED		SPIN AXIS DIRECTION			SPIN AXIS		BALL	SEPARATOR	BALL		
				POSITION	POSITION	X	Y	Z	PITCH (DEG)	YAW (DEG)	ROTATION (DEG)	SPEED (RPM)	PERCENT	(RPM)	ERROR
				TANG	RAD										
1	242.950	207.200	0.0	34.1	-2.893	0.446									
				36.1	-0.408	-1.130									
							-0.4178	0.8394	0.3476	22.492	-26.458	18.909	1836.	0.44	9514.-53.07
2	246.600	202.900	0.0	22.1	-3.751	-0.825									
				35.2	-0.728	0.912									
							-0.3808	0.9067	0.1815	11.320	-22.781	63.633	1816.	-0.68	31231. 54.07
3	250.300	198.450	0.0	35.2	-1.131	0.317									
				35.3	1.138	-0.780									
							0.0650	0.9977	-0.0186	-1.068	3.725	31.520	1860.	1.72	16061.-20.77
4	253.950	194.250	0.0	23.1	-2.164	-0.790									
				35.3	-1.314	0.418									
							0.2500	0.9664	0.0599	3.545	14.506	27.294	1825.	-0.19	13647.-32.68
5	257.600	189.900	0.0	25.1	-3.764	-0.827									
				35.2	-0.775	-1.091									
							-0.3792	0.4135	0.8278	63.456	-42.518	5.902	1827.	-0.07	2915.-85.62
6	261.300	185.500	0.0	37.3	3.499	-0.583									
				35.3	-1.782	-0.926									
							-0.0131	0.9976	-0.0678	-3.889	-0.753	124.634	1823.	-0.30	63105.211.30
7	264.900	181.200	0.0	38.1	-3.789	-0.944									
				35.1	2.001	-0.130									
							0.0288	0.9915	-0.1268	-7.287	1.663	34.612	1838.	0.55	17199.-15.16
8	268.600	176.850	0.0	36.6	-3.351	-0.616									
				36.1	-0.395	0.963									
							0.1489	0.9864	-0.0700	-4.058	8.582	30.733	1811.	-0.93	15463.-23.72
9	272.200	172.500	0.0	36.5	-3.034	0.246									
				36.1	-0.843	0.520									
							0.2647	0.9619	-0.0690	-4.101	15.385	27.036	1863.	1.91	13434.-33.73

Frame No.	O.R. Position (deg)	I.R. Position (deg)	Ball To Point Sep (in.)	Point No.	Measured Coordinates		Spin Axis Direction			Spin Axis		Ball Rotation (deg)	Separator Speed (rpm)	Percent Error	Ball Speed (rpm)	Ball Percent Error
					Tang	Rad	X	Y	Z	Pitch (deg)	Yaw (deg)					
10	275.950	168.200	0.0	42.2	-3.878	0.323						40.409	12.059	1797.	-1.69	6106.-69.88
11	279.500	162.850	0.0	42.2	-4.208	-0.454	0.4719	0.5544-0.6855	-51.039							
12	283.200	156.400	0.0	34.1	-2.938	0.357		-0.1264	0.9895-0.0696	-4.024	-7.278	60.476	1816.	-0.68	29681.-46.42	
13	286.850	155.050	0.0	32.1	-3.711	-1.037			-0.4540	0.4055-0.3259	-38.786	-64.603	1.023	1825.	-0.19	511.-97.48
14	290.450	150.750	0.0	35.2	-1.260	0.216	0.0770	0.9046-0.4193	-24.869	4.862	52.175	1823.	-0.30	26417.-30.32		
15	294.000	146.450	0.0	23.1	-3.208	-1.074		-0.0790	0.9956-0.0506	-2.908	-4.534	24.863	1809.	-1.06	12688.-32.48	
16	297.750	142.150	0.0	37.1	-3.673	0.428	0.0638	0.9938-0.0726	-4.179	4.818	31.912	1863.	1.91	15857.-21.78		
17	301.350	137.800	0.0	37.3	-3.514	-0.876	0.0071	0.9988-0.1492	-8.579	0.414	33.813	1811.	-0.93	17013.-16.07		
18	305.000	132.500	0.0	36.1	0.115	0.989		0.0071	0.9888-0.1492	-8.579	0.414	33.813	1837.	0.45	17012.-16.08	
19	308.600	128.150	0.0	36.6	-3.378	-0.875	0.8644	0.5024-0.0191	-2.175	50.838	24.706	1811.	-0.93	12427.-38.68		
20	312.250	124.800	0.0	42.4	-3.880	0.486	0.2347	0.9714-0.0365	-2.151	13.583	29.400	1825.	-0.18	14700.-27.48		
21	315.900	120.350	0.0	42.2	-2.904	-0.075		0.0160	0.9918-0.1271	-7.304	0.925	34.388	1802.	-1.42	16982.-16.23	
22	319.450	115.950	0.0	35.2	0.465	1.110	0.0166	0.9780-0.2080	-12.009	0.971	33.398	1786.	-2.31	16804.-17.10		
23	323.150	111.650	0.0	34.1	-2.977	-0.047		-0.9604	0.0598 0.2720	77.608	-86.440	27.983	1850.	1.18	13992.-30.98	
24	326.650	107.350	0.0	35.2	-0.952	0.691		-0.5828	0.7672-0.2677	-19.233	-37.223	43.572	1795.	-1.83	22344.-10.23	
25	330.250	103.050	0.0	23.1	-3.234	0.510	0.0680	0.9959-0.0601	-3.455	3.906	31.247	1823.	-0.30	15821.-21.95		
26	333.900	98.700	0.0	36.1	1.161	-0.403		-0.0068	0.9710-0.2390	-13.826	-0.398	33.604	1825.	-0.19	16802.-17.11	
27	337.550	94.400	0.0	36.1	1.056	0.204	0.0202	0.9899-0.1402	-8.059	1.169	33.405	1836.	0.44	16808.-17.09		
28	341.150	90.000	0.0	36.1	0.687	0.677	0.3238	0.9372 0.1296	7.875	19.059	35.525	1800.	-1.55	17762.-12.38		
29	344.850	85.700	0.0	36.4	-2.645	-0.130	0.2938	0.7554-0.5857	-37.788	21.255	12.615	1850.	1.18	6308.-68.88		
				34.1	0.296	0.725		0.4623	0.8863-0.0276	-1.782	27.548	23.470	1811.	-0.93	11809.-41.75	

FRAME NO.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES		SPIN AXIS X	DIRECTION Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED (RPM)	BALL PERCENT ERROR
					TANG	RAD										
30	348.450	81.350	0.0	36.1	-0.592	0.711										
				35.2	1.300	-0.692										
31	352.050	77.000	0.0	36.5	-3.091	-0.434										
				36.1	-0.961	0.190										
32	355.700	72.650	0.0	42.2	-3.864	-0.469										
				35.1	-0.571	1.541										
33	359.300	68.350	0.0	35.1	0.0	36.100										
				-0.7	0.0	-0.995										
34	2.950	64.000	0.0	22.1	-3.851	0.372										
				34.1	-2.950	-0.351										
35	5.900	59.650	0.0	35.2	-0.971	0.575										
				35.3	-0.354	1.186										
36	10.050	55.200	0.0	23.1	-3.238	0.142										
				35.3	-1.090	0.782										
37	13.700	50.900	0.0	25.1	-3.790	0.348										
				35.3	-1.410	-0.039										
38	17.300	46.650	0.0	37.1	-3.646	-0.364										
				37.2	-2.768	0.100										
39	21.000	42.400	0.0	38.1	-3.868	0.249										
				36.1	0.624	0.780										
40	24.700	37.950	0.0	36.6	-3.330	0.426										
				36.1	0.0	0.916										
41	28.200	33.700	0.0	35.2	1.375	-0.565										
				23.1	3.215	-1.346										
42	31.800	29.300	0.0	42.4	-3.864	-0.282										
				36.5	-3.011	-0.661										
43	35.300	25.000	0.0	36.1	-0.994	-0.496										
				35.2	0.952	0.801										
44	39.000	20.650	0.0	35.2	0.244	1.146										
				35.3	1.246	0.943										
45	42.600	16.300	0.0	22.1	-3.822	0.034										
				35.1	-1.802	-0.245										
46	46.200	12.000	0.0	35.3	-0.497	1.225										
				36.6	3.445	0.367										
47	49.800	7.750	0.0	23.1	-3.279	-0.079										
				35.2	-1.307	-0.285										
48	53.400	3.450	0.0	35.3	-1.481	-0.185										
				36.1	1.157	-0.271										
49	57.000	350.100	0.0	37.1	-0.363	-0.571										
				37.2	-2.857	-0.119										
							-0.5136	0.8205-0.2509	-17.006	-32.046	125.480	1023.	-0.31	63534.213.42		

FRAME NO.	D.R. POSITION (INCH)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES		X	Y	Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	SPIN AXIS ROLL (DEG)	BALL ROTATION (RPM)	SEPARATOR SPEED PERCENT	BALL SPEED PERCENT	
					TANG	PAN										
50	60.600	354.900	0.0	34.1 36.1	3.031 0.475	-0.637 0.726										
51	64.200	350.400	0.0	36.6 36.1	-0.342 -0.109	0.180 0.832	-0.4070	0.9113	0.0627	3.934	-24.069	77.488	1800.	-1.55	38744. 91.12	
52	67.750	346.050	0.0	36.5 36.1	-2.948 -0.484	0.903 0.563	0.4066	0.2883	-0.8669	-71.607	54.667	7.505	1797.	-1.69	3800.-81.25	
53	71.400	341.800	0.0	42.2 35.2	-3.772 1.330	0.847 0.151	0.1977	0.9719	-0.1276	-7.476	11.495	32.150	1848.	1.08	16785.-17.20	
54	75.000	337.450	0.0	42.2 36.1	-3.828 -0.812	-0.985 1.380	-0.7736	0.6750	-0.0782	-6.611	-47.382	42.766	1811.	-0.93	21518. 6.15	
55	78.500	333.150	0.0	36.1 35.1	-0.645 -1.486	-1.131 0.598	0.3043	0.9523	-0.0222	-1.236	17.721	27.650	1795.	-1.83	14180.-30.05	
56	82.250	328.900	0.0	22.2 22.1	4.258 -2.869	***** -0.069	0.3043	0.9523	-0.0222	-1.236	17.721	27.650	1852.	1.28	13654.-32.64	
57	85.800	324.500	0.0	24.1 25.2	-3.884 -1.054	-0.822 0.405	0.3626	0.5058	-0.0036	-0.413	59.613	121.317	1809.	-1.06	61819.204.96	
58	89.450	320.150	0.0	23.1 25.3	-3.295 -1.206	-0.195 0.594	0.2560	0.9615	-0.1001	-5.941	14.909	30.931	1825.	-0.19	15465.-23.71	
59	93.000	315.800	0.0	25.1 36.2	-3.857 -1.054	-0.043 -1.057	0.9490	0.1225	-0.2900	-66.933	82.586	35.446	1797.	-1.69	17947.-11.46	
60	96.650	311.500	0.0	37.1 37.2	-3.597 -2.764	-0.691 -0.186	0.5568	0.8304	0.0172	1.184	23.843	27.154	1837.	0.45	13667.-32.60	
61	100.300	307.250	0.0	38.1 36.1	-3.863 0.576	-0.080 0.723	0.0666	0.9876	-0.1422	-8.192	3.856	33.527	1848.	1.08	16976.-16.26	
62	104.000	303.000	0.0	36.6 36.4	-3.347 -2.530	1.690 -0.580	-0.2706	0.3673	-0.8899	-67.574	-36.381	6.889	1862.	1.82	3466.-82.90	
63	107.650	298.700	0.0	36.5 35.1	-2.817 1.297	0.879 1.161	-0.3458	0.9369	-0.0513	-3.135	-20.259	86.380	1836.	0.44	43461.114.40	
64	111.300	294.500	0.0	42.4 36.1	-3.863 -0.953	-0.505 0.028	0.0525	0.9893	-0.1358	-7.814	3.036	31.629	1860.	1.72	16117.-20.49	
65	115.000	290.200	0.0	42.2 0.0	-3.357 0.0	-0.926 0.0	-0.9620	0.2707	0.0351	7.397	-74.286	60.417	1850.	1.18	34709. 71.22	
66	118.600	285.900	0.0	35.2 35.3	0.369 1.284	1.082 0.912	-0.9028	0.1829	-0.3892	-64.834	-78.550	108.882	1823.	-0.31	55130.171.96	
67	122.300	281.750	0.0	22.1 35.2	-3.772 -0.250	0.067 0.973	-0.8495	0.4895	0.1969	21.914	-60.050	5.010	1885.	3.12	2553.-87.41	
68	125.950	277.450	0.0	24.1 35.3	-3.850 -0.350	-0.709 1.224	0.4504	0.8451	-0.2880	-18.818	28.058	41.306	1836.	0.44	20783. 2.52	
69	129.600	273.300	0.0	23.1 35.2	-3.209 -1.169	-0.033 -0.240	0.1195	0.9826	-0.1422	-8.234	6.932	32.744	1872.	2.37	16792.-17.17	

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES		SPIN AXIS X	SPIN AXIS Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT ERROR	BALL SPEED PERCENT (RPM) ERROR		
					TANG	RAD											
70	133.300	269.000	0.0	25.1	-3.790	0.133											
				35.3	-1.371	-0.097	0.0044	0.9909	-0.1348	-7.749	0.252	33.779	1846.	0.97	17322.	-14.55	
71	136.900	264.800	0.0	37.1	-3.569	-0.472											
				37.2	-2.725	0.037	0.9088	0.1518	-0.3888	-68.673	80.518	13.995	1863.	1.92	6954.	-65.69	
72	140.650	260.500	0.0	36.1	0.620	0.782											
				36.3	0.365	1.850	0.3239	0.1935	0.9261	78.200	59.150	5.765	1825.	-0.19	2882.	-85.78	
73	144.300	256.150	0.0	36.6	-3.318	0.356											
				36.7	0.057	0.907	0.0622	0.9828	-0.1740	-10.040	3.624	33.957	1858.	1.63	17526.	-13.54	
74	147.900	252.000	0.0	36.1	-0.530	0.649											
				35.2	1.455	-0.576	0.8297	0.4312	-0.3545	-39.428	62.539	6.709	1821.	-0.43	3440.	-83.03	
75	151.450	247.750	0.0	36.5	-2.932	-0.609											
				35.2	1.496	0.066	-0.5550	0.7428	-0.3745	-26.759	-36.764	11.332	1862.	1.82	5702.	-71.87	
76	155.150	243.500	0.0	35.1	-0.565	1.517											
				35.3	1.723	0.114	0.0075	0.9931	-0.1167	-6.702	0.435	38.444	1825.	-0.18	19222.	-5.18	
77	158.800	239.150	0.0	35.2	0.387	1.173											
				35.3	1.286	0.976	0.0075	0.9931	-0.1167	-6.702	0.435	38.444	1872.	2.38	19715.	-2.75	
78	162.450	235.000	0.0	34.1	-2.894	-0.377											
				22.1	-3.719	0.311	-0.6992	0.6177	-0.3599	-30.228	-48.542	144.888	1800.	-1.55	72444.	257.38	
79	166.050	230.600	0.0	24.1	-3.869	-0.485											
				35.2	-0.945	0.624	0.2818	0.9561	-0.0799	-4.779	16.424	29.468	1860.	1.72	15016.	-25.93	
80	169.700	226.400	0.0	23.1	-3.222	0.230											
				35.3	-1.051	0.882	0.2471	0.9591	-0.1382	-8.201	14.447	22.210	1836.	0.44	11175.	-44.87	
81	173.350	222.100	0.0	35.2	-1.024	-0.796											
				35.3	-1.289	0.121	-0.0341	0.9922	-0.1203	-6.913	-1.969	44.469	1848.	1.08	22516.	11.07	
82	177.000	217.850	0.0	37.2	-2.791	0.200											
				36.1	1.104	0.379	0.1972	0.9052	-0.3765	-22.581	12.287	73.718	1811.	-0.93	37091.	82.97	
83	180.600	213.500	0.0	22.2	4.325	-0.912											
				34.1	3.068	-0.744	0.9230	0.3695	-0.1070	-16.153	68.182	38.968	1823.	-0.31	19730.	-2.67	
84	184.200	209.200	0.0	36.6	-3.283	0.474											
				35.2	0.945	-1.274	-0.0836	0.9896	-0.1173	-6.761	-4.830	33.354	1846.	0.97	17105.	-15.62	
85	187.800	205.000	0.0	36.6	-3.120	-1.268											
				36.1	-0.561	0.751	0.1824	0.9806	-0.0720	-4.198	10.537	30.744	1786.	-2.31	15469.	-23.69	
86	191.350	200.600	0.0	36.5	-2.996	-0.413											
				36.1	-0.873	0.248	0.2601	0.9653	-0.0234	-1.390	15.079	26.951	1836.	0.44	13560.	-33.11	
87	195.000	196.300	0.0	42.2	-3.833	-0.472											
				36.1	-0.942	-0.378	0.0429	0.9812	-0.1883	-10.861	2.502	31.965	1836.	0.44	16083.	-20.66	
88	198.650	192.000	0.0	35.2	0.473	1.196											
				35.3	1.352	0.878	0.0429	0.9812	-0.1883	-10.861	2.502	31.965	1846.	0.97	16392.	-19.13	
89	202.250	187.800	0.0	22.2	-4.263	-0.269											
				34.1	-2.911	-0.149	-0.8638	0.3698	-0.3420	-42.763	-66.823	39.777	1836.	0.44	20013.	-1.27	

FRAME NO.	O.R. POSITION (DEG)	T.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES TANG RAD	SPIN AXIS X Y Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (PPM)	SEPARATOR PERCENT ERROR	BALL SPEED (RPM)	BALL PERCENT ERROR
90	205.900	183.500	0.0	24.1 35.3	-3.907 -0.240	-0.193 1.400							
91	209.500	179.200	0.0	12.4 35.2	-4.217 -1.210	-0.215 0.049	0.2268 0.9738-0.0163	-0.960	13.110	20.27	1823.	-0.31	15754.-24.75
92	213.100	175.000	0.0	25.1 35.2	-3.684 -1.403	0.627 0.205	0.1174 0.9900-0.0778	-4.402	6.761	32.290	1846.	0.97	16815.-17.05
93	216.800	170.650	0.0	37.1 37.2	-3.658 -2.905	-0.030 0.358	-0.0175 0.9828-0.1785	-10.286	-1.020	25.065	1839.	0.55	17424.-14.05
94	220.350	166.400	0.0	37.4 36.1	-3.460 0.717	-0.483 0.913	-0.0375 0.9828-0.1785	-10.285	-1.020	25.065	1821.	-0.43	17982.-11.29
95	224.000	162.200	0.0	36.1 22.1	0.136 0.396	1.004 0.285	0.2671 0.6448 0.7162	48.003	22.505	26.901	1860.	1.72	18803.-7.24
96	227.600	157.900	0.0	36.5 36.1	-2.748 -0.447	0.852 0.825	-0.1812 0.7620 0.6217	39.213	-13.378	105.695	1823.	-0.31	53516.164.00
97	231.250	153.600	0.0	36.5 35.2	-3.031 1.465	-0.193 0.112	0.3709 0.8841-0.2841	-17.815	22.740	14.737	1836.	0.44	7415.-63.42
98	234.850	149.300	0.0	42.2 36.1	-3.843 -0.958	-0.162 -0.247	-0.1657 0.9742-0.1534	-8.951	-9.655	44.165	1823.	-0.31	22362.10.31
99	238.400	145.000	0.0	35.2 36.1	0.483 -0.784	1.215 -0.780	0.0306 0.9841-0.1750	-10.084	1.782	33.135	1809.	-1.06	16884.-16.71
100	242.000	140.700	0.0	34.1 35.2	-2.945 -0.272	0.075 1.238	0.0825 0.9935 0.0782	4.501	4.749	21.928	1823.	-0.31	11103.-45.23
101	245.600	136.400	0.0	22.1 35.2	-3.558 -0.913	-1.424 0.848	-0.8006 0.4852-0.2516	-35.924	-58.780	0.480	1823.	-0.31	243.-98.80
102	249.250	132.200	0.0	35.3 36.5	-1.031 3.065	1.031 -0.897	0.3688 0.8944-0.2529	-15.787	22.411	44.867	1860.	1.72	22862.12.78
103	252.900	127.800	0.0	36.1 42.4	1.169 3.958	-0.330 0.203	-0.2822 0.9592-0.0159	-0.948	-16.393	20.629	1814.	-0.80	10250.-49.43
AVERAGE SPEED (RPM)		AVERAGE ABS(SPEED ERROR) (PERCENT)		AVERAGE YAW (DEG.)		AVERAGE PITCH (DEG.)		MEAN BALL POSITION (DEG.)					
SEPARATOR	1828.37		1.0927					0.119	-8.156		0.0		
BALL	20271.19		48.6742										

ITI BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. I-B-2

APP. - 2 -

FRAME NO.	O.R. (DEG)	I.R. (DEG)	BALL POSITION SEP POS (IN.)	POINT NO.	MEASURED COORDINATES TANG RAD	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH													
											BALL RPM	BALL DIA.	SPIN AXIS X	SPIN AXIS Y	SPIN AXIS Z	PITCH (DEG)	YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR (RPM)	BALL SPEED PERCENT	BALL SPEED (RPM)	SEPARATOR ERROR	BALL SPEED PERCENT
			4000.		0.750	3	5.6350	2.8175	12.750	34.276													
1	30.650	16.200	0.0	17.1	-4.019 5.3 -0.679 -0.138						0.1043	0.8270-0.5524		-33.742	7.186	26.915	1763.	-1.12	14166.	-4.43			
2	34.000	11.950	0.0	16.1	-3.873 14.2 -1.298 0.376						0.0596	0.8116-0.5811		-35.602	4.201	28.623	1775.	-0.47	15165.	2.31			
3	37.350	7.750	0.0	15.1	-3.187 13.2 -1.031 -0.340						0.0796	0.8157-0.5730		-35.087	5.576	26.777	1828.	2.51	14187.	-4.29			
4	40.800	3.650	0.0	14.5	-3.524 13.1 -1.229 -0.416						0.0986	0.7796-0.6184		-38.421	7.211	27.254	1766.	-0.95	14158.	-4.48			
5	44.200	359.350	0.0	12.2	-1.496 11.4 0.708 1.207						-0.0284	0.8844-0.4660		-27.784	-1.841	28.723	1783.	0.02	14636.	-1.26			
6	47.700	355.000	0.0	23.1	-4.007 12.4 -2.724 -0.930						0.0366	0.8199-0.5714		-34.872	2.555	29.411	1792.	0.51	15278.	3.08			
7	51.150	350.750	0.0	24.1	-3.475 3.6 -0.337 0.306						-0.5327	0.2085-0.8202		-75.734	-68.620	19.504	1890.	6.01	10687.	-27.90			
8	54.600	346.900	0.0	3.2	-0.210 9.1 0.197 1.070						-0.0367	0.9772-0.2090		-12.070	-2.151	50.314	1693.	-5.04	24694.	66.60			
9	58.050	342.200	0.0	10.3	-3.393 3.1 -0.802 -0.433						0.0736	0.8222-0.5645		-34.474	5.112	28.692	1769.	-0.78	14714.	-0.73			

FRAME NO.	O.R. POSITION (DEG)	T.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES		SPIN AXIS X	SPIN AXIS Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT ERROR	BALL SPEED (RPM)	BALL PERCENT ERROR
					TANG	RAD										
10	61.500	337.850	0.0	9.2	-3.435	0.169										
				9.1	-1.044	0.628	0.0262	0.8101-0.5857	-35.870	1.853	28.394	1806.	1.31	14655.	-1.13	
11	65.000	333.600	0.0	8.5	-3.311	-0.434										
				2.2	-0.455	-1.200	0.1195	0.7963-0.5930	-36.678	8.533	26.980	1744.	-2.22	13836.	-6.66	
12	68.400	329.200	0.0	7.3	-3.289	-0.168										
				6.3	-0.253	1.142	-0.0510	0.8269-0.5600	-34.106	-3.528	29.060	1818.	1.97	15096.	1.84	
13	71.900	325.000	0.0	6.4	-2.782	-0.317										
				5.1	-0.185	-0.926	-0.2498	0.6734 0.6958	45.940	-20.357	20.586	1758.	-1.41	10489.	-29.23	
14	75.350	320.600	0.0	7.1	-4.195	-0.567										
				5.4	-1.304	0.301	-0.1814	0.9440-0.2757	-16.280	-10.880	63.615	1792.	0.51	33047.	122.95	
15	78.800	316.350	0.0	16.1	-4.064	-0.923										
				14.1	-1.172	0.366	-0.0602	0.8526-0.5191	-31.335	-4.036	32.773	1781.	-0.14	16915.	14.12	
16	82.250	312.050	0.0	14.5	-3.131	0.274										
				13.4	-1.055	0.464	0.0342	0.8348-0.5495	-33.355	2.347	27.814	1783.	0.02	14173.	-4.38	
17	85.750	307.700	0.0	14.5	-3.679	-1.264										
				12.4	-1.324	0.438	0.0747	0.8323-0.5493	-33.422	5.130	29.094	1783.	0.02	14825.	0.01	
18	89.250	303.350	0.0	23.1	-3.704	0.290										
				11.1	0.502	0.552	0.0189	0.8116-0.5839	-35.734	1.337	29.105	1755.	-1.59	15022.	1.35	
19	92.650	299.000	0.0	12.3	-3.011	-0.826										
				11.1	-0.876	0.449	0.0398	0.8500-0.5252	-31.712	2.684	28.220	1804.	1.16	14755.	-0.46	
20	96.100	294.800	0.0	24.1	-3.785	-0.780										
				3.6	-1.009	0.189	-0.3864	0.7693-0.5088	-33.480	-26.672	54.293	1664.	-6.66	29151.	96.67	
21	99.200	290.450	0.0	10.3	-3.641	0.0										
				3.5	1.435	0.161	-0.0483	0.4533 0.8900	63.011	-6.086	7.303	1878.	5.32	3562.	-75.97	
22	103.050	286.100	0.0	10.4	-3.940	-0.494										
				8.2	-1.019	0.351	0.0118	0.7994-0.6007	-36.926	0.843	48.944	2184.	22.47	21165.	42.79	
23	108.100	281.900	0.0	20.1	-4.191	-0.199										
				2.4	-1.238	0.475	0.0518	0.8648-0.4994	-30.006	3.431	27.170	1509.	-10.88	14888.	0.44	
24	111.000	277.500	0.0	19.1	-4.051	-0.395										
				6.2	-0.891	0.389	-0.8940	0.4378 0.0949	12.230	-63.908	28.367	1477.	-17.17	17457.	17.77	
25	113.400	273.400	0.0	10.3	-4.184	-0.380										
				7.2	-3.403	-0.491	-0.3024	0.0117-0.9531	-89.297	-87.785	39.758	1758.	-1.41	20259.	36.68	
26	116.850	269.000	0.0	6.6	-3.445	-0.690										
				17.1	-3.957	0.284	-0.7949	0.5439-0.2689	-26.306	-55.622	114.587	1792.	0.51	59526.	301.59	
27	120.300	264.750	0.0	16.1	-3.894	-0.102										
				14.2	-1.349	0.387	0.0748	0.8319-0.5498	-33.463	5.141	28.323	1744.	-2.22	14524.	-2.01	
28	123.700	260.350	0.0	15.4	-4.131	-0.543										
				13.2	-1.073	0.301	0.0989	0.8308-0.5478	-33.398	6.791	28.179	1781.	-0.14	14544.	-1.88	
29	127.150	256.050	0.0	14.5	-3.524	-0.464										
				13.1	-1.244	0.386	0.1137	0.7937-0.5976	-36.981	8.155	27.706	1832.	2.76	14300.	-3.52	

FRAME NO.	O.R. POSITION			I.R. POSITION			BALL TO POINT	MEASURED COORDINATES		SPIN AXIS DIRECTION			SPIN AXIS PITCH	SPIN AXIS YAW	BALL ROTATION	SEPARATOR SPEED	BALL SPEED
	(DEG)	(DEG)	SEP POS (IN.)	NO.	TANG	RAD	X	Y	Z	(DEG)	(DEG)	(DEG)	(RPM)	PERCENT	(RPM)	PERCENT	
30	130.700	251.850	0.0	12.2	-1.529 11.3	-0.338 0.464	-0.464 0.581	0.0938	0.8754-0.4742	-28.441	6.117	25.089	1755.	-1.59	12949.	-12.64	
31	134.100	247.500	0.0	23.1	-3.977 12.3	-0.491 -2.698	-0.170 -0.170	-0.0354	0.7532-0.6569	-41.093	-2.692	31.073	1818.	1.97	16142.	8.90	
32	137.600	243.300	0.0	24.1	-3.530 3.3	0.058 -0.398	-0.658 -0.658	-0.1378	0.8080-0.5729	-35.338	-9.680	32.476	1744.	-2.22	16654.	12.36	
33	141.000	238.900	0.0	1.1	0.287 3.5	-1.145 -0.822	-0.460 -0.460	0.0989	0.7550-0.6482	-40.649	7.463	23.182	1804.	1.17	12122.	-18.22	
34	144.450	214.700	0.0	10.3	-3.481 3.1	-0.353 -0.879	-0.357 -0.357	0.0882	0.8460-0.5259	-31.865	5.954	27.388	1769.	-0.78	14045.	-5.24	
35	147.900	210.350	0.0	9.2	-3.483 2.2	0.154 0.137	-1.048 -1.048	0.0836	0.8198-0.5665	-34.647	5.822	28.301	1795.	0.66	14513.	-2.09	
36	151.400	226.050	0.0	8.4	-3.220 2.2	0.320 -0.496	-1.108 -1.108	0.1712	0.7883-0.5910	-36.857	12.252	25.653	1792.	0.51	13326.	-10.09	
37	154.850	221.800	0.0	7.3	-3.318 6.3	-0.188 -0.357	1.244 1.244	0.1560	0.9604-0.2310	-13.522	9.228	49.353	1704.	-4.45	24372.	64.43	
38	158.300	217.150	0.0	6.6	-3.144 5.1	0.035 -0.225	-0.822 -0.822	-0.5277	0.3752 0.7621	63.788	-54.589	6.992	1850.	3.77	3805.	-74.33	
39	161.700	213.200	0.0	6.5	-3.301 5.1	-0.114 -0.888	-1.066 -1.066	0.0264	0.8162-0.5772	-35.268	1.855	29.643	1811.	1.58	14915.	0.62	
40	165.300	208.850	0.0	15.1	-2.870 14.1	0.112 -1.244	0.434 -0.434	0.0321	0.8471-0.5305	-32.059	2.170	28.046	1740.	-2.40	14569.	-1.71	
41	168.650	204.500	0.0	14.5	-3.146 13.3	0.295 -1.087	0.579 -0.579	0.0826	0.8249-0.5593	-34.139	5.721	27.251	1781.	-0.14	14065.	-5.11	
42	172.100	200.200	0.0	14.5	-3.697 12.3	-1.278 -0.807	1.066 1.066	0.0050	0.8050-0.5933	-36.392	0.359	30.184	1783.	0.02	15380.	3.76	
43	175.600	195.850	0.0	11.5	-0.837 11.1	0.657 0.516	0.649 -0.649	0.0084	0.8523-0.5230	-31.533	0.562	27.637	1792.	0.51	14357.	-3.14	
44	179.050	191.600	0.0	12.3	-3.051 11.1	-0.778 -0.940	0.546 -0.546	0.2347	0.8102-0.5371	-33.542	16.154	24.461	1778.	-0.30	12790.	-13.71	
45	182.450	187.350	0.0	24.1	-3.768 3.3	-0.737 -0.786	-0.776 -0.776	-0.0719	0.8627-0.5005	-30.120	-4.764	49.282	1792.	0.51	25601.	72.72	
46	185.900	183.100	0.0	11.2	-0.700 11.5	-0.579 -1.438	-0.219 -0.219	-0.0719	0.8627-0.5005	-30.120	-4.764	49.282	1795.	0.66	25273.	70.50	
47	189.400	178.800	0.0	10.4	-3.938 8.2	-0.476 -1.036	-0.427 -0.427	0.0873	0.8292-0.5521	-33.658	6.008	46.847	1669.	-6.42	22992.	55.12	
48	192.800	174.050	0.0	9.2	-3.769 6.2	-0.662 0.454	-0.543 -0.543	0.0071	0.7706-0.6373	-39.592	0.526	28.166	1876.	5.20	15540.	4.84	
49	196.200	170.200	0.0	6.2	-0.879 6.1	0.454 -0.549	0.764 -0.764	0.0195	0.9031-0.4291	-25.415	1.236	28.962	1766.	-0.95	15045.	1.50	

FRAME NO.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT POS. (IN.)	POINT NO.	MEASURED COORDINATES TANG RAD	SPIN AXIS X	Y	Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT ERROR	BALL SPEED PERCENT (RPM) ERROR	
														SPIN POS. (IN.)	SPIN POS. (IN.)
50	199.600	165.200	0.0	18.2	-4.144 5.1	-0.275 0.716	-0.803 -0.803								
51	203.100	161.700	0.0	6.4	-2.450 4.5	-0.654 0.630	-0.925 -0.925	0.8080 0.5779	0.1146	17.214	54.429	50.104	1818.	1.07	26023. 75.60
52	206.550	157.400	0.0	16.1	-2.911 14.2	-0.042 0.400	-0.0849 -1.720	0.2769-0.9571		-73.862	-17.048	19.213	1781.	-0.14	8916.-33.10
53	210.050	153.100	0.0	15.1	-3.202 13.2	-0.503 -1.044	-0.212	0.8384-0.5424		-32.950	2.972	28.752	1795.	0.66	14745. -0.53
54	213.450	148.950	0.0	14.5	-3.547 13.1	-0.378 -1.745	-0.290	0.8384-0.5408		-32.815	4.450	27.549	1778.	-0.30	14404. -2.82
55	216.900	144.650	0.0	25.1	-4.202 12.2	-0.409 -1.510	-0.226	0.8769-0.5115		-31.471	17.106	23.829	1804.	1.17	12460.-15.94
56	220.300	140.250	0.0	23.1	-4.005 11.5	-0.381 -0.209	-0.744	0.8236-0.4993		-31.224	-18.088	34.690	1744.	-2.22	17790. 20.02
57	223.700	135.900	0.0	24.1	-3.505 3.1	0.209 -0.455		0.8344-0.5603		-32.408	2.050	29.982	1755.	-1.59	15475. 4.40
58	227.350	131.700	0.0	11.4	-2.284 1.1	-0.749 0.290	-1.102	0.8328-0.5536		-33.614	0.360	30.168	1860.	4.20	15372. 3.71
59	230.650	127.350	0.0	10.2	-2.440 1.1	-0.209 -0.210	-1.074	0.8409-0.5358		-32.503	5.205	26.288	1725.	-3.23	13746. -7.27
60	234.100	123.150	0.0	9.2	-3.463 2.3	0.272 -0.170	-0.491	0.8394-0.5211		-31.829	10.424	26.724	1804.	1.17	12973. -5.73
61	237.500	118.900	0.0	8.5	-3.304 2.2	-0.332 -0.105		0.9008-0.2543		-21.473	-15.575	42.744	1755.	-1.59	22062. 49.84
62	240.950	114.550	0.0	7.3	-3.296 6.1	-0.048 -0.843		0.4435-0.4346		-44.421	60.503	22.257	1792.	0.51	11562.-22.00
63	244.400	110.200	0.0	6.6	-3.079 5.1	0.165 -0.789		0.9550-0.2040		-12.057	12.710	47.490	1769.	-0.78	24354. 64.30
64	247.900	105.900	0.0	6.5	-3.246 14.2	0.0 -0.610	-0.730	0.3881-0.7646		63.089	-57.982	7.046	1795.	0.66	3613.-75.67
65	251.250	101.700	0.0	15.2	-3.123 13.5	-0.298 -0.487	-0.782	0.8318-0.5537		-33.650	2.734	28.482	1775.	-0.47	15090. 1.80
66	254.750	97.350	0.0	14.6	-3.408 13.3	-0.094 -1.026	-0.647	0.8411-0.5391		-37.661	3.000	28.495	1783.	0.02	14520. -2.04
67	258.200	93.150	0.0	14.5	-3.679 12.3	-1.136 -0.707	-1.157	0.8426-0.5346		-32.394	4.414	27.747	1804.	1.16	14509. -2.12
68	261.700	88.900	0.0	23.1	-3.693 11.5	0.497 -0.783	-0.706	0.8273-0.5591		-34.050	3.828	28.538	1806.	1.21	14729. -0.63
69	265.200	84.600	0.0	12.3	-3.041 11.1	-0.673 -0.878	-0.610	0.8311-0.5555		-33.757	1.710	26.736	1795.	0.66	15249. 2.88
								0.7999-0.5598		-24.984	15.129	24.876	1766.	-0.95	12923.-12.82

16
9

FRAME NO.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES TANG RAD	SPIN AXIS X	SPIN AXIS Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED (RPM)	BALL PERCENT				
											BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED (RPM)	BALL PERCENT				
70	268.600	80.300	0.0	24.1 3.3	-3.797 -0.777	-0.616 -0.726					-0.1053	0.7656-0.6346	-39.656	-7.831	30.719	1766.	-0.95	15958.	7.66
71	272.000	76.000	0.0	10.2 3.5	-2.770 -1.424	-0.309 0.285					0.4854	0.8598-0.1584	-10.439	29.449	6.630	1548.	-13.16	3422.	-76.91
72	275.000	71.250	0.0	10.4 8.2	-3.940 -0.990	-0.330 0.460					0.0653	0.8303-0.5535	-33.690	4.494	46.925	2026.	13.62	24377.	64.46
73	278.900	67.450	0.0	9.2 2.3	-3.770 -0.765	-0.516 0.337					0.0625	0.8451-0.5310	-32.144	4.231	27.568	1792.	0.51	14321.	-3.38
74	282.350	63.200	0.0	19.1 6.2	-4.028 -0.811	-0.239 0.474					0.0806	0.8499-0.5208	-31.501	5.415	27.746	1790.	0.36	14603.	-1.48
75	285.750	59.000	0.0	18.2 5.1	-4.151 0.265	-0.225 0.857					0.1277	0.9481-0.2912	-17.073	7.673	49.739	1766.	-0.95	25839.	74.32
76	289.150	54.700	0.0	6.6 14.2	-3.394 0.169	-0.555 0.752					0.1664	0.1003-0.9809	-84.159	58.902	15.362	1769.	-0.78	7878.	-46.85
77	292.600	50.350	0.0	16.1 14.2	-3.840 -1.227	0.077 0.504					0.0523	0.8234-0.5651	-34.461	3.637	28.932	1792.	0.51	15030.	1.40
78	296.050	46.100	0.0	15.1 13.2	-3.166 -0.987	-0.416 -0.209					0.0681	0.8513-0.5203	-31.431	4.576	27.179	1781.	-0.14	14028.	-5.36
79	299.500	41.800	0.0	14.5 13.1	-3.467 -1.168	-0.276 -0.249					0.5303	0.6712-0.5180	-37.660	38.310	23.007	1781.	-0.14	11874.	-19.89
80	302.950	37.500	0.0	25.1 12.1	-4.157 -1.465	-0.366 -0.255					-0.0617	0.8078-0.5862	-35.967	-4.366	32.802	1818.	1.97	17040.	14.96
81	306.450	33.300	0.0	12.3 11.1	-2.628 -0.115	0.0 0.738					0.1954	0.7469-0.6356	-40.395	14.660	24.227	1752.	-1.77	12668.	-14.53
82	309.800	29.000	0.0	24.1 3.3	-3.460 -0.323	0.310 -0.592					-0.0927	0.8414-0.5325	-32.328	-6.290	31.356	1804.	1.17	16395.	10.61
83	313.250	24.800	0.0	11.4 1.1	-3.233 0.317	-0.618 -1.167					0.0913	0.8283-0.5528	-33.720	6.288	27.290	1769.	-0.78	13995.	-5.58
84	316.700	20.450	0.0	10.3 8.2	-3.395 -0.275	-0.150 -0.590					0.0844	0.8678-0.4897	-29.439	5.554	27.057	1772.	-0.63	14527.	-1.99
85	320.000	16.300	0.0	9.3 2.2	-3.382 0.180	-0.475 -1.045					0.0833	0.7974-0.5976	-36.850	5.966	28.811	1792.	0.51	14967.	0.97
86	323.450	12.050	0.0	8.5 2.2	-3.277 -0.436	-0.288 -1.095					0.1292	0.7987-0.5876	-36.342	9.190	25.892	1806.	1.31	13364.	-9.84
87	326.950	7.800	0.0	7.3 6.1	-3.232 0.0	0.030 0.771					0.0038	0.8653-0.5012	-30.079	0.253	29.679	1763.	-1.12	15621.	9.39
88	330.300	3.550	0.0	17.2 5.1	-3.685 -0.116	0.0 -0.856					0.1690	0.8072-0.5656	-35.022	11.825	25.945	1789.	0.02	13220.	-10.81
89	333.800	359.200	0.0	6.5 14.2	-3.180 -0.491	0.100 0.686					0.0367	0.8105-0.5846	-35.804	2.595	28.948	1804.	1.17	15136.	2.11

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES		SPIN AXIS X	DIRECTION Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	SEPARATOR PERCENT ERROR	BALL SPEED PERCENT ERROR
				TAN _G	RAO									
90	337.250	355.000	0.0	15.2	-3.114 -0.233									
				13.5	-0.397 0.705									
91	340.650	350.900	0.0	14.6	-3.376 0.0	0.0195 0.8341-0.5513		-33.463	1.340	28.456	1789.	0.35	14977.	1.04
				13.3	-0.903 0.610									
92	14.800	308.100	0.0	14.2	0.389 0.643	-0.0170 0.8497-0.5270		-31.805	-1.143	76.728	1777.	-0.32	3994.-73.06	
				14.1	1.146 0.365									
93	18.150	303.950	0.0	16.1	-3.697 0.252	0.0667 0.8814-0.4677		-27.953	4.326	28.912	1787.	0.20	15420.	4.03
				13.5	0.506 0.632									
94	21.600	299.650	0.0	15.4	-4.017 -0.151	0.0378 0.8188-0.5728		-34.974	2.643	29.032	1781.	-0.14	14984.	1.09
				14.1	-1.503 0.196									
95	25.050	295.400	0.0	14.6	-3.562 -0.637	0.0536 0.8242-0.5638		-34.372	3.719	27.643	1792.	0.51	14360.	-3.12
				13.1	-0.496 -0.287									
96	28.350	291.250	0.0	12.2	-1.262 -0.186	0.1186 0.7377-0.6647		-42.019	9.133	24.892	1772.	-0.63	13365.	-9.83
				12.4	-1.615 0.334									
97	31.800	286.950	0.0	12.1	-1.602 -0.329	0.1186 0.7377-0.6647		-42.019	9.133	24.892	1781.	-0.14	12847.-13.33	
				11.1	0.178 0.634									
98	35.300	282.750	0.0	11.3	-1.700 0.065	0.1729 0.5999-0.7812		-52.478	16.075	18.542	1818.	1.97	9632.-35.02	
				3.3	-0.149 -0.672									
99	38.800	278.500	0.0	3.6	-1.285 0.113	-0.0866 0.9035-0.4198		-24.924	-5.477	44.924	1806.	1.31	23187.	56.43
				3.2	0.028 -0.530									
AVG. SPEED (RPM)		AVG. ABS(SPEED ERROR) (PERCENT)		AVERAGE YAW (DEG.)		AVERAGE PITCH (DEG.)		MEAN BALL POSITION (DEG.)						
SEPARATOR	1783.14		2.0709											
BALL	14822.56		23.1834		0.603		-29.963		0.0					

I T I BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. 1-B-3

APP. - 2 -

	SHAFT RPM	BALL DIA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH						
FRAME NO.	C.P. POSITION (DEG)	T.R. POSITION (IN.)	BALL TC POINT SEP POS NO.	MEASURED COORDINATES TANG. RAD	SPIN AXIS X	DIRECTION Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	BALL ROTATION (DEG)	SEPARATOR (RPM)	BALL SPEED PERCENT	SEPARATOR (RPM)	BALL SPEED PERCENT
1	257.400	267.950	0.0	23.1 -3.396 0.482 35.1 -0.824 -1.210	-0.0375	0.9935-0.1076	-6.181	-2.160	82.416	5538.	0.05	52466.	2.13
2	266.100	257.800	0.0	37.3 -3.852 -0.287 34.2 1.737 -0.223	0.0241	0.9923-0.1218	-6.996	1.392	40.621	5524.	-0.21	51582.	0.41
3	270.450	252.700	0.0	36.4 -2.848 0.095 22.2 3.763 -0.460	-0.2217	0.9564-0.1903	-11.253	-13.051	32.949	5592.	1.01	41402.	-19.41
4	274.900	247.600	0.0	24.1 3.894 0.665 35.1 1.422 0.627	0.0038	0.9999-0.0146	-0.837	0.220	39.358	5524.	-0.21	49978.	-2.72
5	279.250	242.500	0.0	35.1 0.757 1.300 42.4 -3.710 -0.285	0.0293	0.9893-0.1428	-8.213	1.695	39.685	5460.	-1.36	50395.	-1.91
6	283.550	237.350	0.0	35.2 1.450 0.822 34.2 -1.308 0.840	-0.0037	0.9943-0.1064	-6.109	-0.212	34.257	5621.	1.54	43272.	-15.77
7	288.000	232.300	0.0	35.1 -1.112 0.864 34.2 -1.612 -0.198	0.0201	0.9978-0.0626	-3.591	1.154	33.682	5460.	-1.36	42771.	-16.74
8	292.300	227.150	0.0	36.4 2.967 0.487 35.1 -1.428 -0.046	0.0741	0.9958-0.0531	-3.049	4.254	46.933	5553.	0.32	59913.	16.62
9	296.650	222.100	0.0	36.5 2.953 -0.587 35.2 -1.329 0.774	0.0676	0.9941-0.0444	-6.852	-3.890	34.761	5524.	-0.21	44141.	-16.08

FRAME NO.	C.P. POSITION (DEG)	T.P. POSITION (DEG)	SFP POS (IN.)	BALL TO POINT NO. INC.	MEASURED COORDINATES TANG RAD		SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED PERCENT	BALL SPD PERCENT	BALL SPD PERCENT	
					X	Y	Z	PITCH (DEG)	YAW (DEG)							
10	301.000	717.000	0.0	25.2	-1.567	-0.280										
				42.2	3.629	-0.648										
11	205.750	211.200	0.0	37.2	-3.274	0.229		-0.0371	0.9876-0.0692	-2.294	-2.123	35.064	5455.	-1.47	4501.-12.40	
				36.1	0.468	0.553										
12	203.700	205.850	0.0	34.1	2.701	-0.549		0.0491	0.9896-0.1352	-7.786	2.782	38.354	5631.	1.54	48448.-5.70	
				36.1	0.0	0.675										
13	314.050	201.750	0.0	24.1	3.666	-0.156		0.7741	0.6301-0.0609	-5.523	50.854	7.372	5524.	-0.22	3012.-94.14	
				36.1	0.424	0.455										
14	318.400	196.550	0.0	42.4	-3.672	0.554		0.0626	0.9977-0.0261	-1.498	3.590	39.295	5466.	-1.26	49375.-3.89	
				35.2	1.626	-0.548										
15	322.650	191.500	0.0	42.2	-3.569	-0.174		3.0307	0.9946-0.0994	-5.709	1.769	38.648	5434.	-0.94	49863.-2.93	
				35.1	0.087	1.457										
16	327.100	196.400	0.0	37.2	3.379	0.455		0.0570	0.9901-0.1290	-7.368	3.295	36.452	5592.	1.01	46804.-10.84	
				35.1	-0.851	1.151										
17	331.450	181.300	0.0	36.4	3.004	-0.131		0.0203	0.9948-0.0969	-5.564	1.744	40.620	5524.	-0.21	51590. 0.40	
				35.2	-0.116	1.558										
18	335.850	176.150	0.0	35.2	-1.391	1.070		-0.0049	0.9989-0.0465	-2.564	-0.395	39.941	5529.	-0.13	50188.-2.31	
				36.1	0.694	-0.353										
19	340.200	171.100	0.0	36.1	0.799	0.060		-0.2525	0.9676-0.0059	-0.352	-14.626	12.210	5553.	0.32	15597.-69.66	
				42.4	3.805	0.290										
20	344.500	166.000	0.0	32.2	4.005	-0.588		0.0671	0.9683-0.2778	-16.164	4.007	37.525	5499.	-0.84	47905. -6.75	
				35.1	0.627	0.432										
21	348.900	160.950	0.0	24.2	1.724	0.111		0.0076	0.9985-0.0547	-3.135	0.439	38.289	5587.	0.93	48622.-5.36	
				34.1	2.497	-1.104										
22	353.300	155.850	0.0	26.1	-0.333	0.512		0.0638	0.9951-0.0752	-4.320	3.671	40.942	5558.	0.40	51590. 0.42	
				35.1	1.555	-0.043										
23	357.600	150.700	0.0	35.1	1.248	0.146		0.2106	0.9563-0.2029	-11.982	12.420	51.968	5460.	-1.36	65991. 28.45	
				23.1	3.406	-1.232										
24	361.900	145.600	0.0	35.1	0.383	1.407		-0.0293	0.9980-0.0564	-3.232	-1.682	35.677	5489.	-0.84	45545.-11.35	
				35.2	1.691	0.192										
25	5.200	140.450	0.0	37.2	3.366	-0.212		0.0696	0.9856-0.1541	-8.886	4.040	36.254	5529.	-0.12	45555.-11.33	
				34.2	-1.518	0.488										
26	10.600	125.400	0.0	25.1	-1.307	0.567		-0.2353	0.9662-0.1056	-6.239	-13.687	31.609	5519.	-0.21	40568.-21.03	
				35.3	1.112	1.696										
27	14.950	130.250	0.0	35.1	-1.397	-0.475		0.0235	0.9948-0.0994	-5.709	1.354	36.235	5495.	-0.74	45770.-10.91	
				36.6	3.612	0.533										
28	19.300	125.200	0.0	35.2	-1.465	0.400		0.1232	0.9924-0.0059	-0.341	7.075	44.069	5553.	0.32	56258. 9.51	
				36.5	3.007	0.100										
29	23.700	120.000	0.0	42.2	3.657	0.215		0.1287	0.9886-0.0779	-4.497	7.415	46.605	5500.	-0.64	58256. 13.40	
				35.3	-1.988	0.069										
					-0.7281	0.6289-0.2725		-23.430	-49.182	28.648	5519.	-0.31	36767.-28.43			

FRAME NO.	I.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP. POS (IN.)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			BALL ROTATION (DEG)	SEPARATOR SPEED PERCENT (PPM)	BALL SPEED PERCENT (RPM)	BALL ERROR				
					X	Y	Z								
30	28.000	114.950	0.0	37.3 36.1	-3.848 0.300	-0.518 0.583		-0.0269	0.9694-0.2441	-14.134	-1.534	43.447	5553.	0.32	55465. 7.96
31	32.350	109.900	0.0	75.1 27.2	1.583 3.751	-0.373 -0.321		0.2699	0.8666 0.4108	25.846	17.300	136.619	5480.	-0.84	174407.239.49
32	36.650	104.800	0.0	34.2 36.3	0.569 -1.568	1.445 0.584		-0.0324	0.1999-0.9793	-78.463	-9.211	14.570	5592.	1.01	18308.-64.36
33	41.100	99.700	0.0	23.1 35.1	3.575 0.636	0.300 1.265		0.0116	0.9975-0.0692	-3.965	0.664	37.751	5455.	-1.47	48450. -5.69
34	45.250	94.600	0.0	35.1 37.2	-0.298 3.315	1.352 -0.917		-0.0273	0.9353-0.3528	-20.670	-1.669	20.643	5524.	-0.21	26213.-48.98
35	49.700	82.500	0.0	35.2 36.1	0.444 0.043	1.445 0.841		0.0167	0.9959-0.0888	-5.098	0.963	36.650	5524.	-0.21	46539. -9.41
36	54.050	84.400	0.0	35.1 35.2	-1.444 -0.554	-0.233 1.353		0.0141	0.9980-0.0615	-3.524	0.812	33.088	5524.	-0.21	42017.-18.21
37	58.400	79.300	0.0	36.5 35.2	2.996 -1.327	-0.538 0.657		0.0948	0.9901-0.1040	-5.995	5.467	44.352	5587.	0.93	56371. 9.73
38	62.800	74.250	0.0	42.2 35.2	3.660 -1.525	-0.530 -0.425		-0.2147	0.9658-0.1453	-8.553	-12.531	32.599	5558.	0.40	41178.-19.85
39	67.200	69.150	0.0	37.2 32.2	-3.273 4.007	-0.054 0.475		-0.7192	0.6173-0.3188	-27.318	-49.363	31.063	5484.	-0.94	40081.-21.98
40	71.450	64.100	0.0	36.4 36.1	-2.805 0.0	0.512 0.577		-0.0734	0.9793-0.1887	-10.908	-4.284	42.861	5592.	1.01	53857. 4.84
41	75.500	59.000	0.0	35.1 24.1	1.570 4.007	0.398 0.0		0.2973	0.9545 0.0239	1.437	17.299	53.246	5519.	-0.31	68337. 33.02
42	80.200	53.950	0.0	23.1 36.5	3.616 -2.848	-0.378 -0.335		0.5363	0.8415 0.0654	4.441	32.507	25.577	5495.	-0.74	32308.-37.11
43	84.550	48.800	0.0	35.2 34.2	1.613 -1.098	0.548 1.028		0.0323	0.9883-0.1493	-8.593	1.874	36.251	5553.	0.32	46278. -9.92
44	88.900	43.750	0.0	35.1 37.4	-0.918 3.990	1.029 -0.226		-0.0418	0.9988-0.0265	-1.518	-2.399	37.836	5558.	0.40	47793. -6.97
45	93.200	38.650	0.0	22.2 35.1	-3.642 -1.382	0.169 0.158		0.0514	0.9944-0.0924	-5.308	2.961	38.606	5558.	0.40	48766. -5.08
46	97.700	33.550	0.0	35.2 24.1	-1.096 -3.710	0.963 -0.980		-0.3876	0.8598-0.3325	-21.146	-24.268	107.875	6212.	12.21	152295.196.45
47	102.100	29.450	0.0	55.2 23.1	-1.508 -3.451	0.0		0.8908	0.3151 0.3275	46.107	70.522	41.754	5077.	-8.29	48178. -6.22
48	106.500	23.450	0.0	36.1 35.2	0.594 -1.255	0.445 -1.051		0.1948	0.7030 0.6839	44.212	15.488	28.987	5541.	0.09	18356.-64.27
49	115.250	13.250	0.0	36.6 22.2	-3.521 3.727	0.0		-0.2726	0.9611 0.0437	2.605	-15.835	29.386	5553.	0.32	37514.-26.98

FRAME NO.	D.F.P. (DEG)	I.F.P. (DEG)	BALL TO POINT SEP POS (IN.)	MEASURED COORDINATES NO.	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED PERCENT (RPM)	BALL ERROR
					X	Y	Z						
50	112.600	8.200	0.0	36.3 35.1	-1.659 1.232	0.248 0.932		-0.2077 0.4317-0.8095	-61.930 -42.649	17.247 5593.	0.85	15719.-59.40	
51	123.950	3.200	0.0	35.1 35.1	0.347 -0.614	1.411 -0.312		0.0424 0.6989-0.0178	1.023 2.432	17.380 5466.	-1.26	21838.-57.43	
52	128.300	358.000	0.0	37.2 35.1	3.387 -0.634	-0.195 1.254		-0.6477 0.7335-0.2061	-15.632 -41.442	17.134 5524.	-0.22	21758.-57.65	
53	132.650	352.200	0.0	35.2 36.1	1.503 0.197	0.176 -0.820		-0.0052 0.9925-0.1223	-7.025 -0.301	107.543 5519.	-0.31	138023.168.67	
54	136.550	347.950	0.0	35.3 35.1	-0.161 -1.389	1.915 -0.460		0.0260 0.9993-0.0261	-1.495 1.544	46.083 5519.	-0.31	59143. 15.12	
55	141.250	342.800	0.0	36.5 33.1	3.070 -3.446	0.078 0.257		-0.0184 0.9895-0.1434	-8.244 -1.066	38.366 5500.	-0.64	47958. -6.65	
56	145.650	327.600	0.0	42.2 35.2	3.710 -1.419	0.100 -0.639		0.9928 0.0943-0.0734	-27.883 84.575	32.902 5621.	1.54	41550.-19.10	
57	150.100	322.550	0.0	37.2 36.3	-3.227 0.455	-0.605 1.636		-0.8711 0.0915-0.4825	-79.264 -84.004	84.566 5524.	-0.21	107387.109.03	
58	154.450	327.450	0.0	36.4 35.1	-2.886 -0.160	0.0 0.564		0.0553 0.9882-0.1427	-8.217 3.238	38.612 5519.	-0.31	49555. -3.54	
59	158.750	322.400	0.0	36.1 35.1	-0.517 1.423	0.300 0.583		0.0540 0.9934-0.1012	-5.815 3.109	46.855 5466.	-1.26	58876. 14.60	
60	163.100	317.200	0.0	23.1 35.2	3.588 1.584	0.185 -0.234		0.0169 0.9936-0.0500	-2.864 0.967	38.709 5647.	2.01	49630. -3.30	
61	167.500	312.250	0.0	36.1 35.2	-0.442 1.462	-0.602 0.784		-0.2724 0.8423-0.4651	-28.909 -17.920	16.288 5431.	-1.88	20574.-59.95	
62	171.600	307.050	0.0	35.1 37.4	-1.089 3.959	0.387 0.242		0.0595 0.9970-0.0500	-2.870 3.418	42.635 5587.	0.93	54141. 5.39	
63	176.200	302.000	0.0	36.6 35.1	3.552 -1.407	-0.385 -0.060		0.9687 0.1580-0.1913	50.442 80.736	12.195 5495.	-0.74	15404.-70.02	
64	180.550	296.850	0.0	36.1 35.3	0.755 -0.933	-0.394 1.658		-0.0924 0.9917-0.0896	-5.165 -5.322	45.516 5587.	0.93	57798. 12.51	
65	184.950	291.800	0.0	36.1 42.2	0.776 3.608	-0.122 -0.872		0.2207 0.9702-0.1004	-5.907 12.815	49.291 5524.	-0.21	62592. 21.84	
66	189.200	286.700	0.0	32.2 36.1	4.026 0.504	0.085 0.517		0.0699 0.9972-0.0269	-1.546 4.010	40.218 5553.	0.32	51342. -0.06	
67	193.650	281.650	0.0	34.1 36.1	2.684 0.036	-0.759 0.641		0.2738 0.9566-0.0599	-5.959 15.970	61.360 5495.	-0.74	77509. 50.87	
68	198.000	276.500	0.0	36.6 24.2	-3.552 1.089	-0.380 1.237		0.0758 0.9928-0.0920	-5.354 4.364	38.128 5621.	1.54	48162. -6.25	
69	202.450	271.450	0.0	36.5 35.1	-2.854 1.079	0.056 1.064		0.0669 0.9927-0.1004	-5.774 3.854	35.928 5489.	-0.84	45865.-10.72	

FRAME NO.	P.R. (DEG)	I.P. (DEG)	BALL TO POINT POSITION (IN.)	SEP POS. (IN.)	BALL NO. (REFG)	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION X Y Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	
70	-206.750	266.350	0.0	-42.2	-3.584	0.130 25.1 0.198 1.449	-	-	-	-	-	-	
71	211.100	261.300	0.0	37.2	3.398	0.174 34.2 -1.535 0.315	0.0769 0.9914-0.1063 -0.0143 0.9963-0.0848	-6.120 -4.865 -2.737	4.435 -0.823 -5.595	36.157 38.048 33.235	5553. 5558. 5587.	0.32 0.40 0.93	46158.-10.15 48052.-6.45 42203.-17.85
72	215.500	256.200	0.0	36.4	3.005	-0.434 36.1 0.266 -0.752	-3.0974 0.9941-0.0475 -0.1332 0.9732-0.1877	-10.915 -9.065	-7.791 0.395	46.551 37.069	5529. 5519.	-0.12 -0.31	58494. 13.86 47575. -7.39
73	219.900	261.150	0.0	24.1	-3.845	-0.293 35.1 -1.344 -0.531	-	-	-	-	-	-	
74	224.100	246.000	0.0	23.1	-3.468	0.110 35.2 -1.471 0.294	-0.0069 0.9875-0.1576	-10.915 -9.065	-7.791 0.395	46.551 37.069	5529. 5519.	-0.12 -0.31	58494. 13.86 47575. -7.39
75	228.600	240.950	0.0	35.2	-1.460	-0.683 42.2 3.688 0.464	-	-	-	-	-	-	
76	232.950	235.850	0.0	36.1	0.245	0.650 34.2 1.776 -0.119	0.1268 0.9917-0.0192 0.2416 0.9669-0.0814	-1.108 -4.813	7.288 14.030	44.717 5.759	5524. 5621.	-0.21 1.54	56783. 10.53 7274.-85.84
77	237.400	230.800	0.0	36.4	-2.838	-0.158 36.1 -0.170 0.620	-	-	-	-	-	-	
78	241.750	225.650	0.0	36.1	-0.522	0.305 12.3 4.236 -0.454	0.0757 0.9861-0.1478 -0.1238 0.9914-0.0426	-8.523 -2.463	4.387 -7.116	38.995 38.273	5495. 5617.	-0.74 1.47	49257. -4.12 48859. -4.89
79	246.150	220.650	0.0	34.2	-0.528	1.493 35.2 1.724 0.072	0.0075 0.9955-0.0947	-5.432	0.432	65.489	5538.	0.05	41691.-18.85

FRAME NO.	O.R. (DEG)	I.R. (IN.)	BALL TO POINT SEP. POS. NO.	MEASURED COORDINATES		SPIN AXIS X	SPIN AXIS Y	SPIN AXIS Z	BALL ROTATION (DEG.)	SEPARATOR (RPM)	BALL SPEED (RPM)	BALL SPEED PERCENT								
				POSITION (DEG)	POSITION (IN.)	TANG	RAD	PITCH (DEG.)	YAW (DEG.)											
80	254.850	210.500	0.0	35.1	-1.128	0.853														
				36.2	2.580	-0.261		0.1808	0.9757-0.1240	-7.240	10.496	27.551	5558.							
81	259.250	205.400	0.0	36.6	3.681	-0.134		35.2	-0.513	1.417	-0.0844	0.9964	0.0048	0.277	-4.843	36.587	5524.	-0.22	46460.	-9.56
82	263.600	200.300	0.0	35.2	-1.350	0.747		12.3	-4.120	-0.369	0.2658	0.9633-0.0372	-2.214	15.424	35.364	5558.	0.40	44669.	-13.05	
83	268.000	195.200	0.0	23.1	-3.292	-1.176		36.1	0.768	0.237	-0.2915	0.8961-0.3347	-20.479	-18.019	8.000	5489.	-0.84	10212.	-80.12	
84	272.300	190.100	0.0	37.2	-3.241	0.108		36.1	0.464	0.590	0.8380	0.4115-0.3582	-41.038	63.846	119.691	5460.	-1.36	151988.	195.85	
85	276.600	184.950	0.0	22.1	4.237	-0.303		34.2	4.646	0.489	0.7153	0.6908	0.1058	8.711	45.998	168.646	5587.	0.93	214150.	316.85
86	281.000	179.900	0.0	36.6	-3.518	-0.672		36.1	-0.473	0.390	0.1961	0.9802-0.0283	-1.653	11.313	35.007	5617.	1.47	44690.	-13.01	
87	285.400	174.900	0.0	36.5	-2.901	-0.213		35.1	0.963	1.174	0.0473	0.9936-0.1024	-5.884	2.728	37.416	5529.	-0.13	47016.	-8.48	
88	289.800	169.750	0.0	42.2	-3.619	-0.273		35.1	0.033	1.454	0.0475	0.9919-0.1179	-6.777	2.744	38.466	5519.	-0.31	49368.	-3.90	
89	294.100	164.700	0.0	34.2	-1.594	0.112		35.2	0.881	1.299										
AVG. SPEED (RPM)			AVG. ABS(SPEED ERROR) (PERCENT)		AVERAGE YAW (DEG.)		AVERAGE PITCH (DEG.)		MEAN BALL POSITION (DEG.)											
SEPARATOR	5535.68		0.8990		2.551		-7.275		0.0											
BALL	51373.35		32.4792																	

I T I BALL MOTION DATA REDUCTION

ITI BALL MOTION TEST NO. 1-B-4 5-23-73

APP. - 2 -

	SHAFT RPM		BALL DIA.	TEST BALL NO.	PITCH DIA.	SEPARATOR MEAN RAD	FILM MAGNIFICATION	OBJECT LENGTH						
FRAME NO.	D.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT SEP PCS (IN.)	MEASURED COORDINATES NO. (TANG RAD)	SPIN AXIS X	DIRECTION Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT ERROR	BALL SPEED (RPM)	BALL PERCENT ERROR
1	108.500	44.800	0.0	36.5 74.2	-2.777 0.153	-0.237 1.277								
2	112.850	39.600	0.0	42.2 35.1	-3.475 0.331	-0.122 1.147	0.0903	0.9856-0.1430	-8.253	5.232	35.906	5466.	-0.63	45117. 5.95
3	117.200	34.500	0.0	34.2 37.2	-1.407 3.505	0.062 0.0	0.0605	0.9791-0.1943	-11.227	3.534	38.368	5524.	0.42	48721. 14.41
4	121.450	29.450	0.0	35.1 35.2	-1.232 0.161	0.236 1.399	-0.1882	0.9664-0.1752	-10.279	-11.023	32.027	5484.	-0.30	41325. -2.95
5	125.750	24.450	0.0	24.1 35.1	-3.815 -1.313	-0.328 -0.700	0.0985	0.9947-0.0294	-1.655	5.656	30.842	5548.	0.87	39796. -6.55
6	130.000	19.350	0.0	36.5 42.4	3.016 3.826	0.189 -0.355	0.0320	0.9675-0.2508	-14.533	1.892	39.498	5455.	-0.84	50692. 19.04
7	139.700	9.100	0.0	36.3 34.2	0.316 1.711	1.457 -0.424	0.8751	0.4834 0.0232	2.750	61.083	35.399	5509.	0.16	22416.-47.36
8	143.000	4.100	0.0	36.6 36.1	-3.450 -0.223	0.616 0.314	-0.9209	0.3746-0.1083	-16.131	-67.866	11.935	5548.	0.87	15400.-63.84
9	147.300	358.950	0.0	34.2 35.1	0.587 1.480	1.152 0.315	0.1706	0.9653-0.1975	-11.565	10.019	39.868	5460.	-0.73	50626. 18.89
							-0.0019	0.9796-0.2010	-11.594	-0.113	31.483	5519.	0.33	40406. -5.11

FRAME NO.	O.R. POSITION (DEG)	I.R. POSITION (DEG)	BALL TO POINT (IN.)	POINT NO.	MEASURED COORDINATES			SPIN AXIS X	DIRECTION Y	SPIN AXIS Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	SEPARATOR PERCENT	BALL SPEED (RPM)	BALL SPEED PERCENT	
					SEP POS (IN.)	TANG	RAD											
10	151.600	313.900	0.0	34.2	-0.388	1.213												
				35.2	1.774	-0.466												
11	156.550	349.850	0.0	35.1	-0.169	1.142												
				35.2	1.506	0.541												
12	160.200	343.750	0.0	35.1	-0.969	0.680												
				37.4	4.030	0.259												
13	164.550	338.650	0.0	35.2	-0.393	1.289												
				36.4	2.986	0.209												
14	168.850	333.650	0.0	35.2	-1.265	0.692												
				35.3	-0.910	1.540												
15	173.150	328.450	0.0	23.1	-3.430	-0.981												
				36.1	C.780	-0.056												
16	177.450	323.400	0.0	37.2	-3.216	0.255												
				36.1	0.524	0.304												
17	186.100	313.200	0.0	36.3	-1.195	0.928												
				34.2	1.133	0.956												
18	190.400	308.000	0.0	36.5	-2.779	0.021												
				36.1	-0.560	-0.187												
19	194.750	303.000	0.0	35.1	0.418	1.159												
				42.2	-3.557	0.202												
20	199.050	297.900	0.0	34.2	-1.395	0.177												
				35.2	1.236	0.942												
21	203.400	292.800	0.0	35.1	-1.227	0.364												
				36.1	0.326	-0.952												
22	207.700	287.750	0.0	24.1	-3.844	-0.054												
				35.1	-1.333	-0.564												
23	212.000	282.700	0.0	35.2	-1.440	0.303												
				36.1	0.852	-0.294												
24	220.700	272.600	0.0	37.2	-3.252	-0.561												
				36.1	0.317	0.381												
25	225.000	267.450	0.0	36.1	-0.096	0.416												
				22.2	3.691	-0.815												
26	229.250	262.450	0.0	35.1	1.562	0.231												
				24.1	3.985	0.224												
27	233.600	257.250	0.0	42.4	-3.609	-0.074												
				34.2	-0.142	1.347												
28	237.950	252.300	0.0	34.2	-1.045	0.833												
				35.1	0.025	1.260												
29	242.250	247.150	0.0	35.1	-0.816	0.892												
				37.3	4.010	0.578												
							0.1073	0.9937-0.0339		-1.953	6.162	40.134	5553.	0.96	51234.	20.32		

FRAME NO.	T.R. (DEG)	I.R. (DEG)	BALL POSITION SFP POS (IN.)	TC POINT NO.	MEASURED COORDINATES TANG RAD	SPIN AXIS DIRECTION			SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	BALL PERCENT ERROR
						X	Y	Z						
50	340.750	119.950	0.0	36.3	-1.047 1.114 36.1 -0.379 0.264				-0.5386 0.4523 0.7108	57.533 -49.980	6.836 5455. -0.84		8774. -79.40	
51	354.000	114.850	0.0	12.3	4.264 -0.089 35.1 1.310 0.579				0.1291 0.9916-0.0123	-0.711	7.417 40.779 5524. 0.42		51783. 21.60	
52	358.350	109.750	0.0	35.1	0.557 1.074 42.4 -3.528 -1.192				0.1244 0.9895-0.0733	-4.236	7.163 36.799 5419. -1.47		47482. 11.50	
53	2.550	104.650	0.0	32.2	32.2 -3.865 -0.310 34.2 -1.395 0.331				0.2356 0.9511-0.1999	-11.869	13.914 33.132 5524. 0.42		42072. -1.20	
54	5.900	99.550	0.0	35.1	-1.183 0.410 35.2 0.415 1.243				0.0415 0.9956-0.0839	-4.815	2.384 37.242 5519. 0.33		47797. 12.24	
55	11.200	94.500	0.0	24.1	-3.869 0.194 35.1 -1.404 -0.530				0.0518 0.9786-0.1991	-11.500	3.032 38.536 5460. -0.73		48935. 14.92	
56	15.500	89.350	0.0	35.2	-1.440 0.332 36.5 3.008 -0.335				-0.1325 0.9753-0.1767	-10.271	-7.735 32.198 5613. 2.04		41545. -2.44	
57	19.850	84.400	0.0	36.1	0.633 0.042 42.2 3.669 -0.338				0.9814 0.0147 0.1913	85.612	89.143 3.426 5362. -2.52		4373. -89.73	
58	24.050	79.200	0.0	37.3	-3.900 -0.154 36.1 0.336 0.304				0.3336 0.9399-0.0727	-4.421	19.544 33.585 5484. -0.30		43336. 1.77	
59	28.300	74.150	0.0	36.4	-2.837 0.105 34.1 2.751 -0.522				-0.0425 0.9970 0.0652	3.741	-2.443 44.554 5489. -0.20		56878. 33.57	
60	32.600	69.050	0.0	36.3	-1.402 0.508 34.2 0.829 1.078				-0.2181 0.1783-0.9595	-79.474	-50.732 10.640 5519. 0.33		13655. -67.93	
61	36.900	64.000	0.0	42.4	-3.653 -0.086 34.2 -0.164 1.256				0.1052 0.9851-0.1363	-7.881	6.094 35.479 5489. -0.20		45292. 6.36	
62	41.200	58.900	0.0	42.2	-3.462 -0.693 35.1 0.015 1.148				0.0367 0.9795-0.1980	-11.426	2.148 40.346 5548. 0.87		52059. 22.25	
63	45.500	53.900	0.0	34.2	-1.516 -0.240 36.1 0.0 -1.045				-0.0571 0.9927-0.1060	-6.093	-3.291 49.061 5558. 1.04		61972. 49.53	
64	49.900	48.800	0.0	22.2	-3.553 -0.055 35.1 -1.344 -0.071				0.0712 0.9702-0.2315	-13.422	4.197 37.182 5489. -0.20		47466. 11.47	
65	54.200	43.700	0.0	35.2	-1.115 0.782 35.3 -0.690 1.577				0.0165 0.9982-0.0570	-3.268	0.946 40.226 5489. -0.20		51352. 20.59	
66	58.500	38.600	0.0	23.1	-3.417 -0.622 35.2 -1.536 -0.238				0.6266 0.7517-0.2056	-15.298	39.813 64.724 5501. 0.02		41645. -2.20	
67	62.050	28.500	0.0	36.1	0.034 0.348 36.3 -0.100 1.459				-0.2000 0.5597 0.8042	55.166	-19.666 2.747 5455. -0.84		3526. -91.72	
68	71.300	23.400	0.0	36.6	-3.536 0.0 35.1 1.595 -0.340				0.2456 0.9608-0.1286	-7.626	14.339 34.252 5460. -0.73		43495. 2.14	
69	75.600	18.250	0.0	36.5	-2.800 0.258 35.1 1.304 0.584				-0.0112 0.9810-0.1939	-11.183	-0.654 40.239 5583. 1.80		51643. 21.20	

FRAME NO.	D.R. POSITION (DEG)	I.P. POSITION (DEG)	BALL TO POINT SEP POS (IN.)	POINT NO.	MEASURED COORDINATES		X	Y	Z	SPIN AXIS PITCH (DEG)	SPIN AXIS YAW (DEG)	BALL ROTATION (DEG)	SEPARATOR SPEED (RPM)	BALL SPEED (RPM)	BALL PERCENT ERROR
					TANG	RAD									
70	79.350	13.250	0.0	36.1	-0.545 34.2	-0.622 -0.708 1.093									
71	84.200	8.100	0.0	32.2	-3.385 34.2	-0.368 -1.387 0.315	-0.0240	0.9997	0.0043	0.249	-1.377	24.617	5426.	-1.36	31426.-26.20
72	89.500	3.050	0.0	35.1	-1.179 36.2	0.403 2.534 -0.158	0.1732	0.9691	-0.1755	-10.266	10.132	34.681	5519.	0.33	44511. 4.53
73	92.800	357.950	0.0	24.1	-3.309 35.2	0.241 -0.681 1.119	0.3980	0.9154	-0.0599	-3.745	23.499	18.566	5489.	-0.20	23701.-44.34
74	97.150	352.850	0.0	35.2	-1.384 36.5	0.361 3.028 -0.341	0.0827	0.9752	-0.2054	-11.894	4.850	38.331	5524.	0.42	48673. 14.30
75	101.450	347.700	0.0	36.3	-1.915 36.1	0.141 0.669 0.054	-0.0088	0.9915	-0.1298	-7.460	-0.510	35.881	5460.	-0.73	45563. 7.00
76	105.700	342.700	0.0	37.3	-3.903 36.1	-0.074 0.356 0.328	0.9509	0.2785	0.1351	25.877	73.678	16.176	5514.	0.24	20985.-50.72
77	110.000	337.600	0.0	36.4	-2.809 34.1	0.170 2.761 -0.527	0.3719	0.9272	-0.0440	-2.717	21.855	33.366	5489.	-0.20	42594. 0.03
78	114.250	332.550	0.0	36.3	-1.388 34.2	0.614 0.893 1.102	-0.0345	0.9963	0.0785	4.503	-1.986	43.432	5484.	-0.30	56041. 31.60
79	118.600	327.450	0.0	42.4	-3.655 34.2	0.059 -0.099 1.296	-0.2203	0.1729	-0.9600	-79.788	-51.874	10.867	5524.	0.43	13800.-67.59
80	122.900	322.400	0.0	42.2	-3.482 85.1	-0.561 0.101 1.214	-0.4706	0.8757	0.1084	7.057	-28.255	142.615	5519.	0.33	183034.329.82
80	122.500	322.400	0.0	42.2	-3.482 85.1	-0.561 0.101 1.214	11.6875	-0.0000	*****	0.000	*****	-0.000	0.	0.0	***** 0.0

	Avg. Speed (RPM)	Avg. Abs(Speed Errcr) (Percent)	Average Yaw (Deg.)	Average Pitch (Deg.)	Mean Ball Position (Deg.)
SEPARATOR	5500.48	0.9695			
BALL	42583.39	29.0956	0.322	-9.323	0.0

P-1246

CR-134528

A P P E N D I X 3

Ball Map Printout for Test

Balls No. 2 and 3



INDUSTRIAL TECTONICS, INC., RESEARCH AND DEVELOPMENT DIVISION

++WRITTE POINT, W525BALL2
* DATA SFT W525BALL2 AT LEVEL 001 AS OF 03/20/73

X	Y	Z	TARGET POINT NO
0.32262	-0.18520	0.03690	1.1
0.25729	-0.26010	0.03910	1.2
0.23105	-0.20250	0.12210	1.3
0.25749	-0.26460	-0.06490	2.1
0.22480	-0.26526	-0.12300	2.2
0.18270	-0.32713	-0.01530	2.3
0.15250	-0.33318	-0.07730	2.4
0.05110	-0.34399	-0.14030	3.1
0.00650	-0.34045	-0.15600	3.2
-0.16850	-0.27370	-0.18590	3.3
-0.21490	-0.23915	-0.19200	3.4
-0.02100	-0.36775	-0.07030	3.5
-0.19400	-0.30206	-0.10840	3.6
0.17660	-0.26774	-0.19430	4.1
0.16900	-0.21710	-0.25492	4.2
0.12410	-0.28415	-0.20470	4.3
0.06710	-0.29787	-0.21770	4.4
0.05920	-0.22950	-0.29029	4.5
-0.07780	-0.23850	-0.27873	5.1
-0.11200	-0.25190	-0.25422	5.2
-0.04600	-0.28100	-0.24402	5.3
-0.01980	-0.30491	-0.21740	5.4
0.10599	-0.18630	-0.05910	6.1
0.25523	-0.07240	-0.05530	6.2
0.23446	-0.19320	-0.12830	6.3
0.23035	-0.07780	-0.15950	6.4
0.25787	-0.20150	-0.18310	6.5
0.20322	-0.08620	-0.20310	6.6
0.08290	-0.36572	0.00220	7.1
0.06040	-0.36969	0.01750	7.2
0.07700	-0.36312	0.05330	7.3
-0.25773	-0.21020	-0.08830	8.1
-0.23413	-0.10240	-0.13600	8.2
0.33525	-0.15190	-0.0719	8.3
-0.33346	-0.15330	0.07700	8.4
-0.37272	-0.03010	0.00710	8.5
-0.32246	-0.19120	-0.00930	8.6
0.00200	-0.17400	-0.33218	9.1
-0.10620	-0.15790	-0.32313	9.2
-0.10450	-0.08910	-0.34895	9.3
0.09730	-0.15820	-0.32578	10.1
0.19710	-0.07020	-0.31120	10.2
0.12630	-0.07850	-0.34425	10.3
0.06400	-0.11060	-0.35256	10.4
0.17170	-0.01950	-0.33281	10.5
0.28705	0.02090	-0.24040	11.1

BALL MAP - BALL #2

00001
00002
00003
00004
00005
00006
00007
00008
00009
00010
00011
00012
00013
00014
00015
00016
00017
00018
00019
00020
00021
00022
00023
00024
00025
00026
00027
00028
00029
00030
00031
00032
00033
00034
00035
00036
00037
00038
00039
00040
00041
00042
00043
00044
00045
00046
00047

Preceding page blank

P E A T T F W H I T N E Y A I R C R A F T
S C R A P N I L R

VER
7.1

06/21/73
08.09.36

PAGE
47

0.30870	0.10830	-0.18330	11.2	
0.27558	0.08320	-0.24030	11.3	
0.22930	0.05630	-0.29157	11.4	
0.25254	0.14880	-0.23390	11.5	
0.36001	0.04080	-0.09670	12.1	
0.34227	-0.05900	0.09670	12.2	
0.34223	0.09150	-0.09030	12.3	
0.26974	0.03610	-0.05110	12.4	
0.17700	0.07350	-0.34125	13.1	
0.14120	0.14000	-0.31794	13.2	
0.07910	0.06250	-0.35716	13.3	
-0.01660	0.11720	-0.35583	13.4	
0.09850	0.14840	-0.33282	13.5	
0.03110	0.16310	-0.33624	13.6	
0.22290	0.21318	-0.21330	14.1	
0.27723	0.22320	-0.12880	14.2	
0.17300	0.26768	-0.19760	14.3	
0.21420	0.28044	-0.12670	14.4	
0.11900	0.30717	-0.17920	14.5	
0.14090	0.32032	-0.31010	14.6	
-0.09610	0.10030	-0.35093	15.1	
-0.12200	0.05020	-0.35103	15.2	
-0.15460	-0.00120	-0.34165	15.3	
0.01660	-0.03550	-0.37295	15.4	
-0.22300	-0.04640	-0.29782	16.1	
-0.29720	-0.05730	-0.22139	16.2	
-0.15770	-0.12910	-0.29787	16.3	
-0.22070	-0.14450	-0.26653	16.4	
-0.25820	-0.16300	-0.21764	16.5	
-0.21630	0.05500	-0.30135	17.1	
-0.21200	0.13680	-0.27743	17.2	
-0.26400	0.05200	-0.22690	17.3	
0.02760	0.31225	-0.20580	18.1	
-0.03930	0.27307	-0.25400	18.2	
-0.12770	0.21780	-0.27727	18.3	
-0.02050	0.26252	-0.26700	18.4	
-0.04500	0.21710	-0.30244	18.5	
-0.18790	0.22621	-0.23270	19.1	
-0.13250	0.30294	-0.17690	19.2	
-0.20680	0.27413	-0.15070	19.3	
-0.25650	0.24112	-0.12920	19.4	
-0.21180	0.30266	-0.06450	19.5	
-0.00950	0.34694	-0.14200	20.1	
0.07070	0.35430	-0.10050	20.2	
0.01800	0.36812	-0.06920	20.3	
-0.33967	0.07110	-0.14210	21.1	
-0.31498	0.16020	-0.12550	21.2	
-0.36144	0.09270	-0.03730	21.3	
-0.33567	0.16560	-0.02290	21.4	
-0.23870	-0.28916	0.00600	22.1	
-0.21200	-0.30029	0.07420	22.2	
0.32092	0.18100	-0.06980	23.1	
0.36610	0.01460	0.07990	24.1	

REATT SC. #	R	W	H	I	T	N	F	Y	AIRCRAFT	VER	06/21/73	PAGE
SC. #										7.1	08.09.36	48
0.34724	-0.11230	-0.01250	24.2									00101
0.13610	0.22873	-0.26260	25.1									00102
-0.12670	0.34910	0.00930	26.1									00103
-0.21530	0.29964	0.06700	26.2									00104
-0.24700	0.24640	0.09300	26.3									00105
-0.34692	0.12030	0.05740	27.1									00106
-0.21644	0.19000	0.06530	27.2									00107
0.08400	0.36200	-0.02620	28.1									00108
0.17840	0.32223	-0.07100	28.2									00109
0.26930	0.28647	-0.02600	28.3									00110
0.17940	0.32379	0.06000	28.4									00111
0.31822	0.19840	0.00030	29.1									00112
0.35560	0.11330	0.03660	29.2									00113
0.21463	0.18630	0.08320	29.3									00114
0.13490	-0.32225	0.04410	30.1									00115
0.14460	-0.32259	0.12510	30.2									00116
0.21400	-0.29260	0.05600	30.3									00117
0.22620	-0.27023	0.12820	30.4									00118
-0.12570	0.32852	0.13000	31.1									00119
-0.14440	0.27983	0.20500	31.2									00120
-0.04900	0.26178	0.26400	32.1									00121
0.07200	0.30443	0.20680	32.2									00122
0.24980	0.15591	0.23220	33.1									00123
0.12700	0.23068	0.26200	33.2									00124
0.25240	0.24868	0.12280	33.3									00125
0.15600	0.20104	0.16020	33.4									00126
-0.18650	0.03200	0.32376	34.1									00127
-0.12530	0.13600	0.28980	34.2									00128
-0.29320	0.12930	0.19478	34.3									00129
-0.33122	-0.08430	0.15430	35.1									00130
-0.21740	-0.17600	0.24977	35.2									00131
-0.13480	-0.25161	0.24320	35.3									00132
-0.26280	-0.12000	0.23908	35.4									00133
-0.06820	-0.32701	0.17040	36.1									00134
0.02360	-0.22133	0.30180	36.2									00135
-0.01130	-0.34491	0.14670	36.3									00136
0.07500	-0.23103	0.28570	36.4									00137
0.04630	-0.35388	0.11510	36.5									00138
0.12420	-0.23693	0.26280	36.6									00139
-0.03200	-0.27946	0.24800	36.7									00140
0.10520	-0.30959	0.18360	36.8									00141
-0.04900	-0.05850	0.36715	37.1									00142
-0.12660	0.01070	0.35282	37.2									00143
-0.12270	-0.06500	0.34835	37.3									00144
-0.22630	-0.05550	0.29363	37.4									00145
0.05900	0.23940	0.28254	38.1									00146
-0.00720	0.20720	0.31248	38.2									00147
-0.02700	0.12880	0.35115	38.3									00148
-0.09780	0.12430	0.34001	38.4									00149
0.09470	0.18120	0.31436	38.5									00150
0.01430	0.36794	0.07100	39.1									00151
0.08300	0.34698	0.11550	39.2									00152
-0.01030	0.35926	0.10700	39.3									00153

P R A T T & W H I T N E Y A I R C R A F T
S C . P A N E L S

VFR
7.1

06/21/73
08.09.36

PAGE
49

-0.03200	0.25555	0.07730	39.4	
0.04000	0.11880	0.35343	40.1	00154
0.10700	0.12580	0.33668	40.2	00155
0.11210	0.02690	0.35684	40.3	00156
0.17450	-0.07200	0.32402	40.4	00157
0.08900	-0.10540	0.34870	40.5	00158
0.34396	0.04290	0.13550	41.1	00159
0.34215	-0.08940	0.12200	41.2	00160
0.30793	0.11480	0.18080	41.3	00161
0.30235	0.06520	0.21200	41.4	00162
0.31400	-0.04270	0.19910	41.5	00163
0.27197	-0.07180	0.24800	41.6	00164
0.22480	0.00200	0.30014	41.7	00165
0.18920	0.08870	0.31139	41.8	00166
0.26320	0.07820	0.25541	41.9	00167
0.23620	0.05650	0.28573	41.1	00168
-0.19150	-0.29413	0.14550	42.1	00169
-0.23930	-0.26333	0.11840	42.2	00170
-0.18290	-0.27009	0.18500	42.3	00171
-0.24980	-0.23695	0.14860	42.4	00172
0.20347	-0.18410	0.25560	43.1	00173
0.27466	-0.11430	0.22830	43.2	00174
0.21557	-0.20480	0.22850	43.3	00175
0.30110	-0.13780	0.17600	43.4	00176
0.23030	-0.22890	0.18760	43.5	00177
***** ABOVE ACTION SATISFACTORILY COMPLETED *****				1 00178

++WRITING TO INT.W535BALL3
 * DATA SET W535BALL3 AT LEVEL 002 AS OF 06/11/73

X	Y	Z	TARGET POINT NO
-0.36604	-0.07900	0.02000	1.1
-0.34355	-0.14900	-0.02000	1.2
-0.36328	-0.05500	-0.07500	1.3
-0.31104	-0.19400	0.07900	2.1
-0.33295	-0.15400	0.04500	2.2
-0.31549	-0.12700	0.15900	2.3
-0.34666	-0.08500	0.11500	2.4
-0.36364	-0.01200	0.06200	3.1
-0.34576	-0.08000	0.02100	3.2
-0.36828	0.03000	-0.06400	3.3
-0.35870	0.07000	-0.08400	3.4
-0.36515	0.07900	0.02000	3.5
-0.36269	0.08400	-0.04500	3.6
-0.34475	-0.08300	-0.12200	4.1
-0.31896	-0.11100	-0.16300	4.3
-0.29940	-0.12200	-0.19000	4.4
-0.28655	-0.20400	-0.13000	4.5
-0.28986	-0.23400	-0.04300	5.1
-0.27752	-0.24700	0.05100	5.2
-0.23600	-0.28728	-0.04900	5.3
-0.19200	-0.31789	-0.05200	5.4
-0.21300	-0.30012	0.07200	6.1
-0.27139	-0.21700	0.14100	6.2

BALL MAP - BALL #3

00001
00002
00003
00004
00005
00006
00007
00008
00009
00010
00011
00012
00013
00014
00015
00016
00017
00018
00019
00020
00021
00022
00023
00024

P R A T T & W H I T N E Y A I R C R A F T
S C R A M L I T

VER
7.1
06/21/73
08.05.36

PAGE
50

-0.13600	-0.31021	0.09803	6.3	
-0.24129	-0.22600	0.17700	6.4	00025
-0.15400	-0.31624	0.13000	6.5	00026
-0.10500	-0.29593	0.20500	6.6	00027
-0.27023	-0.15600	0.20800	7.1	00028
-0.25437	-0.12800	0.24400	7.2	00029
-0.26745	-0.08700	0.24800	7.3	00030
-0.32347	-0.05000	0.18300	8.1	00031
-0.34768	-0.01200	0.14000	8.2	00032
-0.32532	-0.01400	0.18500	8.3	00033
-0.29151	0.01900	0.23500	8.4	00034
-0.31277	0.05500	0.18800	8.5	00035
+0.34449	0.07700	0.12100	9.1	00036
-0.31425	0.15200	0.12500	9.2	00037
-0.33068	0.16600	0.06100	9.3	00038
-0.33955	0.15900	0.00700	10.1	00039
-0.34282	0.12600	-0.08500	10.2	00040
-0.31936	0.13900	-0.05400	10.3	00041
-0.27166	0.23000	-0.11900	10.4	00042
-0.29519	0.21300	-0.11900	10.5	00043
-0.33795	0.09900	-0.13600	11.1	00044
-0.34064	0.01600	-0.15600	11.2	00045
-0.32157	0.06400	-0.18200	11.3	00046
-0.29417	0.11700	-0.20100	11.4	00047
-0.30163	0.04100	-0.21900	11.5	00048
-0.29477	-0.03600	-0.22900	12.1	00049
-0.27236	-0.09900	-0.23800	12.2	00050
-0.23300	-0.03000	-0.28824	12.3	00051
-0.23600	-0.05500	-0.27551	12.4	00052
-0.26054	-0.16800	-0.21100	13.1	00053
-0.24221	-0.22800	-0.17300	13.2	00054
-0.21000	-0.18100	-0.25252	13.3	00055
-0.20100	-0.21400	-0.23330	13.4	00056
-0.19300	-0.24173	-0.21200	13.5	00057
-0.19000	-0.27500	-0.17000	13.6	00058
-0.18500	-0.30636	-0.11200	14.1	00059
-0.14600	-0.29105	-0.18600	14.2	00060
-0.14100	-0.32498	-0.12300	14.3	00061
-0.09900	-0.31373	-0.18000	14.4	00062
-0.09700	-0.33733	-0.13200	14.5	00063
-0.13500	-0.34551	-0.05500	14.6	00064
-0.14300	-0.34666	0.00200	15.1	00065
-0.14600	-0.34100	0.05500	15.2	00066
-0.04400	-0.37202	0.01700	15.3	00067
-0.08600	-0.34266	0.12300	15.4	00068
-0.12300	-0.30211	0.18500	15.5	00069
-0.00900	-0.33464	0.16900	16.1	00070
-0.03100	-0.31378	0.20300	16.2	00071
-0.05300	-0.29140	0.23000	16.3	00072
-0.11100	-0.25941	0.24700	16.4	00073
-0.19000	-0.18700	0.26373	16.5	00074
-0.10900	-0.19200	0.30312	17.1	00075
-0.15800	-0.14300	0.30856	17.2	00076
			17.3	00077

PRATT & WHITNEY AIRCRAFT
SC-PANJIR

VER 06/21/73
7.1 08.09.36

PAGE
51

-0.20400	-0.05600	0.30963	18.2	00078
-0.22200	0.01800	0.29328	18.3	00079
-0.12200	-0.04900	0.34747	18.4	00080
-0.17100	0.00600	0.33369	18.5	00081
-0.26432	0.07700	0.25400	19.1	00082
-0.28532	0.13800	0.18900	19.2	00083
-0.24400	0.12200	0.25232	19.3	00084
-0.26900	0.12800	0.28383	19.4	00085
-0.21900	0.18300	0.24326	19.5	00086
-0.29031	0.14500	0.15500	20.1	00087
-0.28026	0.22200	0.09400	20.2	00088
-0.24300	0.26010	0.11800	20.3	00089
-0.21100	0.30374	0.06200	21.1	00090
-0.23000	0.29456	-0.03100	21.2	00091
-0.13500	0.34839	0.03200	21.3	00092
-0.15400	0.33713	-0.05700	21.4	00093
-0.19600	0.26587	-0.18800	22.1	00094
-0.16900	0.20000	-0.26945	22.2	00095
-0.19400	-0.10200	-0.24555	23.1	00096
-0.21200	0.09600	-0.28887	24.1	00097
-0.03200	-0.25600	-0.27215	25.1	00098
-0.01300	-0.34614	-0.14300	26.1	00099
0.09000	-0.34785	-0.11500	26.2	00100
0.12900	-0.33619	-0.09100	26.3	00101
0.04300	-0.37188	0.02200	27.1	00102
0.07600	-0.36535	0.03700	27.2	00103
0.11400	-0.32377	0.15100	27.3	00104
0.04400	-0.20194	0.21800	28.1	00105
0.00400	-0.25900	0.27116	28.2	00106
-0.04500	-0.20000	0.31401	28.3	00107
0.03900	-0.20200	0.30003	28.4	00108
-0.05900	0.16600	0.33104	29.1	00109
-0.14600	0.23700	0.25128	29.2	00110
-0.02600	0.22800	0.29659	29.3	00111
-0.01900	-0.05500	0.37046	30.1	00112
0.04600	0.01600	0.37182	30.3	00113
0.08800	0.06800	0.35913	30.4	00114
-0.07100	0.34374	0.13200	31.1	00115
0.04100	0.34745	0.13500	31.2	00116
-0.11000	0.34623	-0.09300	32.1	00117
0.04700	0.35997	-0.09400	32.2	00118
-0.05900	0.20700	-0.30707	34.1	00119
0.06600	0.21100	-0.30280	34.2	00120
0.02200	0.14000	-0.34719	35.1	00121
0.05500	0.0	-0.37094	35.2	00122
0.09600	-0.06500	-0.35663	35.3	00123
0.17600	0.13000	-0.30455	36.1	00124
0.23400	-0.06900	-0.28479	36.2	00125
0.24096	0.15800	0.24000	36.3	00126
0.30067	-0.05600	-0.21700	36.4	00127
0.29123	0.18000	-0.15300	36.5	00128
0.35055	-0.02900	-0.13000	36.6	00129
0.09100	-0.26616	-0.24800	37.1	00130

OPERATOR	SERIAL NUMBER	TYPE	WEIGHT	VFP	DATE	PAGE
SC.PANLIR		AIRCRAFT		7.1	06/21/73 08.09.36	52
0.14300	-0.18900	-0.28758	37.2			00131
0.15700	-0.24930	-0.23200	37.3			00132
0.20400	-0.23347	-0.20900	37.4			00133
0.27649	-0.21500	-0.13400	38.1			00134
0.32075	-0.18200	-0.06700	38.2			00135
0.28926	-0.23700	0.02800	38.3			00136
0.32173	-0.15600	0.07900	38.4			00137
0.19900	-0.21200	0.23681	39.1			00138
0.26864	-0.18700	0.18300	39.3			00139
0.13000	-0.04100	0.34935	40.1			00140
0.10500	0.00500	0.35995	40.2			00141
0.18400	0.04300	0.22391	40.3			00142
0.17100	0.12400	0.30985	40.4			00143
0.23000	0.12800	0.26710	40.5			00144
0.16500	0.32824	0.07300	42.1			00145
0.17700	0.31479	-0.10100	42.2			00146
0.24500	0.26754	0.09500	42.2			00147
0.29573	0.23400	-0.06500	42.4			00148
0.33339	0.16200	0.05400	43.1			00149
0.32877	0.12400	0.13100	43.3			00150
0.36156	0.01000	0.09900	43.4			00151
0.31661	0.09700	0.17600	43.5			00152
0.27080	0.02700	0.25800	43.6			00153
0.05300	0.27714	0.24700	44.1			00154
0.12500	0.24400	0.25586	44.2			00155
0.18500	0.20400	0.25453	44.3			00156
***** ABOVE ACTION SATISFACTORILY COMPLETED *****					1	